RELIANCE SPRING LOCK WASHERS

for dependable, enduring bolt tightness



Compact, inexpensive, Reliance Spring Lock Washers act as hardened thrust bearings... make possible tighter assemblies. Made of cold drawn spring steel, their powerful coil-spring tension compensates for wear and bolt stretch... keeps bolted assemblies tighter longer.



SPRINGTITES
speed assemblies
cut costs

Eaton Springtites are quality Reliance Spring Lock Washers pre-assembled on bolts or screws so they can't come off. They speed assemblies, eliminate loss, prevent use of wrong washer, simplify inventories—cut costs.





- **CUT COSTS**
- SPEED PRODUCTION
- **IMPROVE PRODUCTS**

RELIANCE RINGS
cut machining time
reduce material costs

Reliance Rings snap into grooves in shafts or counterbores, forming strong shoulders without tedious, costly machining and waste of material. Easily removed when necessary. Open or welded, any diameter, cross section or end cut.

Reliance Division

OFFICES AND PLANT MASSILLON, OHIO

Sales Offices: New York • Cleveland • Detroit • Chicago • St. Louis • San Francisco • Montreal

Behind the Scenes ...

Love Him in South Bend

In nearly every readership study we make, we discover that two things are read by practically all of you. They are "As the Editor Views the News" and "Mirrors of Motordom". The response to Editor-in-Chief E. L. Shaner's weekly editorials by mail, phone and wire is extremely gratifying not only to him, but to all of us; and Art Allen's Detroit section kicks up plenty of interest, too. Like the note we had last week from the president of a South Bend, Ind., manufacturing company, who said, "Who is the guy that writes your "Mirrors of Motordom" department? He has an absolute genius for making mechanical detail clear without the use of drawings. The article on the new Cadillac engine is a masterpiece." Those, sir, are sentiments we can appreciate. We've thought the same thing for years.

Floating Reader Ship

General magazines often make surveys of their readers to show the economic stratification (!) of their audience. All those high-flying words merely mean that they try to discover how much dough the old man brings home of a Saturday night. That is supposed to have a bearing on how many cans of soup or cartons of cigarettes he can afford to buy for the family. We have never had the urge to make any such studies around here because it's the plants, not the people, who have the dough to buy the stuff our advertisers sell. Nevertheless, we would be less than human if we didn't point out that there's at least one reader of this publication who sports a yacht. This

information comes to us and to you by an able investigator who owns and operates an advertising agency in Chicago. Names of our investigators are always maintained in confidence, but we can tell you that his agency goes by the name of the Fensholt Co. At any rate, our pollster in charge of reading on yachts was checking on the Chicago waterfront, and he saw the craft pictured in the photo at the left. Approaching warily, he took the photo at right, which shows plainly a copy of STEEL nestled within the yacht. We have been checking our stencils, but as yet we haven't been able to locate any maritime addresses in the Chicago area. This one, we conclude, will have to be classified as take-home readership. We don't know the owner of the yacht and reader of STEEL, but if he will step forward, we'll be glad to present him with the original kodachromes of these pictures.

We Love All 204

The people around here who know all about such things tell us that there are 204 regular readers of this column. If we seem a little more cautious from here on in, it's because we have always privately suspected that there were only about 29. Seems that a recent readership checkup showed up with that big figure, and we want to thank all 204 of you for bearing with us. The going probably gets pretty tough at times, even though we try to keep on the frothy side of the picture.

Shrolly





(Editorial Index-page 31)

Vol. 123-No. 21

November 22, 1948

BUSINESS STAFF

GEORGE O. HAYS Business Manager

ADVERTISING

R. C. JAENKE Advertising Manager

C. H. BAILEY Service Manager

A. V. ANDERSON Production Manager

New York: E. W. KREUTZBERG, K. A. ZOLLNER Pittsburgh: S. H. JASPER, B. C. SNELL

Chicago: L. C. PELOTT, V. G. BRETTMAN

Cleveland: D. C. Kiefer, H. G. Rowland Los Angeles: F. J. FULLER

CIRCULATION AND MARKET RESEARCH

J. W. ZUBER Director

R. L. HARTFORD Research Manager H. E. METZNER Circulation

G. R. EBERSOLE Mail & List Service

Field Representatives:

A. PRICE, H. R. DUNNE, D. G. HEWITT W. L. POLAND, CALVIN FISHER, JR. B. W. SCHEINERT

MAIN OFFICE

Penton Building, Cleveland 13, Ohio Main 8260

BRANCH OFFICE

New York 1716 East 43rd St.
Murray Hill 2-2581

Chicago 11.....520 North Michigan Ave Whitehall 4-1234

Pittsburgh 19 2806 Koppers Bldg. Atlantic 3211

Los Angeles 4.130 N. New Hampshire Ave. Fairfax 1758 London: 2 Caxton St., Westminster, S.W.1

Published by THE PENTON PUBLISHING Co., Penton Building, Cleveland 13, Ohio, E. L. SHANER, President and Treasurer; G. O. HAYS, Vice President and General Manager; R. C. JAENKE, Vice President and Secretary; E. L. WERNER, Assistant Treasurer. Member, Audit Bureau of Circulations; Controlled Circulation Audit, Inc.; Associated Business Papers Inc., and National Publishers' Association.

and National Publishers' Association, Published every Monday, Subscription in the United States and possessions, Canada, Mexico, Cuba, Central and South America, one year \$10; two years \$15; all other countries, one year \$18. Single copies (current issues) 35c. Entered as second class matter at the postoffice at Cleveland, under the Act of March 3, 1879. Copyright 1948 by the Penton Publishing Co.

Editorial Staff on Contents Page





EDITORIAL STAFF

E. L. SHANER Editor-in-Chief IRWIN H. SUCH Editor WM. M. ROONEY News and Market Editor

JAY DEEULIS Engineering Editor

J. D. KNOX
el Plant Editor

Don S. Cador

Art Editor

ALLEN G. GRAY Consulting Editor

ASSOCIATE EDITORS

J. CAMPBELL • FRANK R. BRIGGS
CE BELL • WALTER F. TOERGE
DAN REEBEL

ASSISTANT EDITORS

RY J. HOLTZ • DOLORES K. BLAHA
N S. MORGAN • L. J. SKUDERIN
VIN L. KARPICK • M. T. BORGERHOFF

RESIDENT EDITORS E. C. KREUTZBERG Washington Editor B. K. PRICE Eastern Editor, New York L. E. BROWNE Associate Editor, New York, Boston

J. C. SULLIVAN Pittsburgh Editor A. H. ALLEN Detroit Editor E. F. Ross Chicago Engineering Editor

HOWARD C. TUTTLE Chicago News and Market Editor VINCENT DELPORT European Editor, London

EDITORIAL CORRESPONDENTS

EDITORIAL CORRESPONDENTS
R. W. KINCEY, Birmingham
L. C. FELDMANN, Buffalo
SAMUEL S. CARR, Cincinnati
MAC HUTCHENS, St. Louis
GEORGE R. REISS, Youngstown
BERT D. LYNN, Los Angeles
ROBERT BOTTORFF, San Francisco
R. C. HILL, Seattle
C. K. CATES, Dallas
F. S. TOBIN, Toronto
J. A. HORTON, Birmingham, Eng.
LEON JAUDOIN, Paris, France
JACQUES FOULON, Liege, Belgium

MAIN OFFICE
Penton Building, Cleveland 13, Ohio
Main 8260

BRANCH OFFICES

vago 11......520 North Michigan Ave.
Whitehall 4-1234 sburgh 19..........2806 Koppers Bldg.
Atlantic 3211

roit 2......6560 Cass Ave.
Madison 3024

shington 4...1123 National Press Bldg. Executive 6849

Angeles 4. .130 N. New Hampshire Ave. Fairfax 1758 don.. 2 Caxton St., Westminster, S.W.1

Business Staff on Page 4

EXT WEEK ...

Quantity Production of Reclaimed Copper Base Alloys

X-Ray Measuring Strains in Metal

Roll Neck Seals-Their Development, Application

Torch-Brazing Aluminum

The Magazine of Metalworking and Metalproducing

VOL. 123, NO. 21

NOVEMBER 22, 1948

NEWS-

* As the Editor Views the News	33
* News Summary	37
Pipelines to Consumers Filling?	39
Shipbuilding Reviving	40
Distribution Forum Seeks Way To Lower Costs	41
Pricing Dislocation Pictured for Capehart Committee	42
Aid for Small Business Urged at Tool & Die Meeting	44
Coal Gasification Pushed as Pilot Plant Opens	45
★ Windows of Washington	46
U.S. Business Eyes Politics in Foreign Industry	49
Report Steel Exports Drop	50
World War II Pattern Followed for Occupational Deferments	51
★ Calendar of Meetings	51
★ Mirrors of Motordom	53
GE Instrument Exhibit Goes on Tour	56
★ Briefs	57
★ The Business Trend	58
★ Men of Industry	60
★ Obituaries	65
★ Construction and Enterprise	150

TECHNICAL-

★ Engineering News at a Glance	67
Fundamentals of Forging Practice—Part XIII	68
★ Seen and Heard in the Machinery Field	72
Current Trends in Powder Metallurgy	73
Irvin Works Modernization Program	84
Bearing Tests Determine Safe Loads	88
* Progress in Steelmaking—Basic Brick in the Open Hearth	91
Water Cooling Speeds Charge of Plant Truck Batteries	98
Controlled Welding and Heating in Propeller Fabrication	100
*Letters to the Editors	106
Transfer Technique Cuts Construction Cost	110
★ New Products and Equipment	117
★ Helpful Literature	


MADKET C-

Market Summary			 	 	 125
Market Prices and	Composite	s	 7	 	 126
Zinc Advances to 3	2-Year Hi	gh	 	 	 130
Index to Advertiser	3				150

ing Index Inc., 29 West 39th St., New York 18

^{*} Denotes Regular Features.

"RELIANCE OK"..P.A.



received in all instances a fair share
of any allotment
your company may
have had available."



Quotation Reproduced From A Letter in Our Files

Steel Plentiful or Scarce.. Reliance Service Clicks with Sheet and Strip Steel Buyers



DEPENDABLE DAN OUR CUSTOMERS' MAN

Here is Reliance Service in action from the P. A's angle . . . in his own words.

"We feel we have been given a fair share of materials . . ." "Your steel is preferred by the men in our shop" . . . "Your service far above the average warehouse in this area" . . . "Your timely assistance kept our plants operating" . . . "You have been doing everything possible under present conditions" . . . "In a pinch we can depend on Reliance coming through" . . . "You have gone all-out" . . . "You helped us out of a bad situation." . . . etc. . . . etc.

Reliance is constantly planning and working toward greater production and supply . . . towards higher standards of steel service.

DETROIT

PRODUCERS OF COLD ROLLED STRIP STEEL

DETROIT 9, MICHIGAN NEW HAVEN 7, CONNECTICUT

RELIANCE STEEL DIVISION

PROCESSORS AND DISTRIBUTORS JOB-FITTED SHEET AND STRIP STEEL

General Office: 1025 South Oakwood Ave., Detroit 25, Mich.

Plants: Chicago Cleveland, Detroit, New Haven
Sales Offices: Grand Rapids, Indianapolis, Lansing, Mich.
New York, St. Louis, Toledo, Worcester

Products: COLD ROLLED STRIP STEEL—Coils and Cut Lengths
Slit or Round Edges . . . All Tempers . . . HOT ROLLED PICKLED
STRIP STEEL—Cut Lengths . . . SHEETS—Hot Rolled . . . Hot Rolled
Pickled . . . Cold Rolled . . . Long Terne . . . Galvanized.



AS THE EDITOR VIEWS THE NEWS

November 22, 1948

Who Is To Lead?

At the annual meeting of the Youngstown Chamber of Commerce last Tuesday, Tom M. Girdler, chairman of Republic Steel Corp., made two statements which are of timely importance to American industry.

In reply to his own question as to who is to lead the way back to world freedom and democracy, he said, "I think we shall find leadership among the businessmen and women of the world." He explained that he meant not those "glibly called big businessmen" but the "10 million in this country—big and little—who run grocery stores, butcher shops and factories and employ 61 million people."

He also remarked that "too many of us—and businessmen are not immune—are too ready to run to the government with our troubles and to ask the government to bail us out."

Almost everybody will agree that better leadership on the part of businessmen is desirable and that running to Uncle Sam for help should be avoided. However, before these laudable objectives can be achieved there must be a greater degree of cohesion among businessmen than exists at present.

It is an unfortunate fact that during and since the war there has developed a rift between the large and powerful corporations on one side and the smaller units of industry on the other. This has grown to the point where many operators of smaller independent establishments have lost confidence in the good intentions of their larger industrial brothers. Many executives of these companies feel they have been treated unfairly and are bitter about it. Many of them have gone to Washington with their troubles reluctantly—after having exhausted all other means of solving their difficulties.

Most informed people know that there are two sides to this unfortunate feud between the strong and the weak. They know the extraordinary lengths to which many powerful companies have gone in an effort to be fair to everybody. Nevertheless there has been unfairness, however unintentional it may have been.

If industry's leaders somehow can find a way to end this unnatural feuding, real or fancied victims will be less inclined to run to Washington, and all industry—reunited—will be in a better position to develop the leadership that Mr. Girdler envisions.

ORDERLY ADJUSTMENT: Evidence is mounting daily to indicate that pipelines extending from producers and manufacturers through distributors to the ultimate consumers are filling up. In the case of some lighter consumer products of the metal working industries, the filled-up pipelines have created a condition wherein a moderate decline in retail sales almost immediately is reflected in reduced production schedules at the factory, resulting in temporary layoffs or cutbacks in number of shifts or in hours worked per week.

This is true of some electrical appliances,

such as radios, vacuum cleaners, ironers, flat irons, water heaters and miscellaneous small appliances. It also is true of typewriters and some types of office machinery.

A somewhat similar situation is found among producers who sell to manufacturers rather than to the public. Some foundries, metal stamping plants, forge shops and similar establishments have experienced moderate to sharp reductions in their backlogs of orders.

It would be unwise to generalize or to assume from these scattered instances that industry is on the verge of a recession. In many lines the

(OVER)

backlogs are not receding. Also, it should be noted that in some consumer lines where the pipelines have been filled, current buying does not reflect the real needs of the public because of price resistance.

This spotty condition, while momentarily painful for some manufacturers, is healthy for the nation's economy as a whole. Much better that segments of industry make their necessary adjustments at staggered periods than that they all be forced to do it at the same time. —p. 39

BUSINESS AND POLITICS: At the annual meeting of the National Tool & Die Manufacturers Association in Milwaukee, Congressman Walter C. Ploeser, chairman of the House Small Business Committee, urged that the State Department be strengthened as an agency for developing foreign trade. On trips abroad he found that American attaches seldom have a sense of responsibility to business men and often take a supercilious attitude toward them. In contrast, their opposite numbers from England are promoting British trade at every opportunity.

American industrialists and American attaches in foreign countries have much to learn about doing business in nations where volatile political conditions prevail. In the past British trade supremacy was built upon the ability of the British to deal with any one of several political regimes in any country with equal effectiveness. Conditions in Germany, France, England and China now challenge us to become proficient in these tactics.

—pp. 44, 49

RETHRONING KING COAL: One of this nation's blessings is a practically inexhaustible supply of high grade bituminous coal. Significantly, two projects which were in the news last week point to a greater utilization of this asset.

At Library, Pa., Pittsburgh Consolidation Coal Co. and Standard Oil Co. of New Jersey opened a \$500,000 pilot plant, the objective of which is to find methods of lowering the cost of converting coal into gas, gasoline, diesel fuel, tar products and chemicals. At Louisiana, Mo., the Bureau of Mines soon will open "coal-to-oil" demonstration plants based upon techniques developed by I. G. Farbenindustrie at Hochst, Germany.

These experimental plants conceivably could alter our national economic outlook in a vitally important way. They could shift a great burden from our questionable supply of petroleum to our abundant resources of soft coal.

—pp. 45, 46

METAL POWDER PARTS: Metal Powder Association estimates that nearly 30 million pounds of products will be manufactured by powder metallurgy processes in the current year. This is striking evidence that powder metallurgy techniques are gaining favor in the

mass production field.

Approx.......

Products of this young branch of industry range in weight from about 0.001 ounce to 100 pounds and in size from 0.001 square inch to approximately 20 inches in diameter. Copper, iron, lead, tin, aluminum and alloy powders in that order will continue to be used in greatest quantity. Almost all commercially-significant metals, as well as certain ceramics and powdered glass, also will be represented. Prices of the most commonly used metal powders range from 11 cents to \$12 per pound.

The automobile and aircraft industries are believed to furnish the largest potential markets for powdered metal products, which currently consist chiefly of gears, cams, bearings, friction materials, sleeves, bushings, rings and filters.

-р. 73

WHO NEEDS WHAT? In a letter to the editor, Walter Siegerist, president of Medart Co., reports on thought-provoking conditions he observed on a business trip through France, Switzerland, England, Germany, Belgium and Holland.

In a Belgian bolt and spike plant he saw more steel in the bar storage building than he had seen in one place in the United States since before the war. In the scrap pile of a Swiss brass mill he saw U. S. brass artillery shell cases bought in the Philippines. He was amazed at the amount of ferrous scrap in Germany. He wondered why the French must have rolled steel props for their coal mines while we get along with timber or concrete props.

On the basis of Mr. Siegerist's observations, perhaps more scrap, pig iron and steel should be flowing from Europe to the United States, where it is needed badly. In exchange, Europeans could take dollars or machinery, either of which they need more than scrap, pig iron or steel.

—p. 106

E.L. Shaner

News Summary

PIPELINES FILLING—An increasing number of the lighter consumer products of the metalworking industries are passing or have passed out of the sellers' market into a buyers' market (p. 39). Reflecting this and reduced sales, several important companies recently laid off employees. However, statistics show consumers are not yet oversupplied—just priced out of the market in many instances. Preparing to face reduced volume of business, supply and machinery manufacturers and distributors at a forum in Chicago discussed ways in which they can lower costs and their break-even point (p. 41).

NEW LIFE FOR SHIPBUILDING—Substantial demand for products of the steel and metalworking industries is seen being generated by revival of interest in the U. S. merchant marine (p. 40). Until about six months ago the merchant marine had been shriveling, but since then contracts have been let for approximately 60 fast tankers and five passenger ships, two new ships that could be mass-produced in event of war have been designed, and a \$65 million superliner has been planned.

NEW SCRAP RECORD—Consumption of purchased or open-market iron and steel scrap this year will set a new record at about 29 million tons (p. 40). This would be 15 per cent greater than the all-time record established last year, and one-third larger than the wartime consumption peak. Edwin C. Barringer, executive vice president, Institute of Scrap Iron & Steel Inc., says it is purchased scrap that is making possible record steel mill operating rates.

DEFENSE STEEL ASSURED—Extension to Sept. 1 next of voluntary allocations programs providing steel for the armed forces, the Atomic Energy Commission projects, and the National Advisory Committee for Aeronautics is virtually assured as result of recent public hearings (p. 41).

PIPEMAKER'S DREAM—For use in producing line and oil field pipe, an electric resistance welder, said to be the largest of its type ever built, has been completed (p. 41) by a Cleveland company. Weighing 90 tons and selling for \$600,000, the giant will be exported to a South American buyer.

FAVORS PRICING CHANGE—On the basis of recent hearings before his trade policies committee, Sen. Homer E. Capehart would recommend legalization of freight absorption (p. 42) for legitimate and competitive purposes.

RECOMMENDS OVERHAULING— To give increased help to the small business man, Congressman Walter C. Ploeser would revamp the Department of Commerce and Federal Trade Commission (p. 44).

STUDY GASIFICATION—Full-scale research into conversion of coal to synthesis gas for factories and homes and for providing important by-products began last week with opening (p. 45) of a \$500,000 pilot plant in Pennsylvania.

OCCUPATIONAL DEFERMENTS—Metalworking companies can expect the same occupational draft deferments for their employees in event of another war as were granted during World War II (p. 51).

HERE AND THERE IN INDUSTRY— A fourth-round wage increase is expected by the Truman administration (p. 43) . . . Radical ideas of some members of the incoming Congress are arousing concern among businessmen (p. 46) . . . Hearings on proposed \$439 million Lake Erie-Ohio River canal have renewed a 31-year-old battle over the proposed 105-mile waterway (p. 45) which would require nine years for construction . . . Retroactive cancellation of portal-to portal pay claims by Congress in 1947 was upheld (p. 45) by the U. S. Supreme Court . . . A tonnage oxygen plant removed from Germany to the United States will go into operation soon (p. 46) at a Bureau of Mines gasification plant . . . Europe within four years can become reasonably prosperous by European standards, believes Paul G. Hoffman, Economic Cooperation Administrator (p. 48) . . . Although shipments to Europe under the Economic Cooperation Administration increased in September, U. S. exports as a whole declined (p. 50), largely because the Army's civilian relief shipments decreased.



Howard Allen on Order Desk

Howard Allen, Sales Representative

Howard Allen, Machine Operator

Outside Man with an Inside Story

Do you know the inside story behind your Ryerson sales representative? It's a story of years spent within a Ryerson plant. A story of the steel inspection department, the operating department, the service department and others—inside jobs through which a Ryerson salesman builds up the experience he applies—out-side—to your steel problems.

That's why you can be sure you're dealing with an experienced steel man when a Ryerson representative calls. He offers a complete steel service—carbon, alloy and stainless, sheared, sawed or slit, burned or bent, punched

or threaded. And he can put to best use all the smoothly coordinated functions that make up this steel service, because he knows about them first hand.

Of course, he can't work miracles. Right now there simply isn't enough steel to meet current demand. But you can depend on your Ryerson salesman to cooperate closely and intelligently with you. From long experience he can often suggest practical alternates when the steel you need is not available. So, to make the most of available steel, talk it over with your Ryerson representative or phone our nearest plant.

Joseph T. Ryerson & Son, Inc. Plants at: New York, Boston, Philadelphia, Detroit, Cincinnati, Cleveland, Pittsburgh, Buffalo, Chicago, Milwaukee, St. Louis, Los Angeles, San Francisco.

RYERSON STEEL

Pipelines to Consumers Filling?

Lighter metalworking products entering buyers' market. Sales of many appliances lag behind 1947. Manufacturers' prices continue upward, but weaken at retail level

AN INCREASING number of the lighter consumer products of the metalworking industries are passing or have passed over the invisible line dividing a sellers' market from a buyers' market.

Most household appliances now can be obtained on spot delivery. Price resistance is noted by retailers who, in many cases, are offering discounts or premiums to promote sales. Sears, Roebuck at Cleveland last week was offering a \$25 Thanksgiving dinner for eight to purchasers of refrigerators or deep freeze cabinets.

Sales of electrical household appliances during the first seven months of 1948 lagged behind those for the comparable 1947 period on practically all items except washers, refrigerators and ranges. Unit sales of irons were down 36 per cent, radios were off 14 per cent, vacuum cleaners de-

clined about 4 per cent and ironers 4 per cent. Miscellaneous small appliance sales dropped. Domestic water heaters are in surplus supply.

Office Machine Backlog Fades— Typewriters, calculating machines, cash registers and other office machinery in standard models now can be obtained immediately in most cases. The volume of sales continues high, but the backlog of orders has melted away.

Bicycles, tricycles and wheel toys are easily obtainable. In some cases retailers are offering them at discounts from list prices.

Even in farm machinery and equipment, where sustained high farm income maintains a high level of demand, the gray market and premium prices have virtually disappeared.

The fancier automobile models, including station wagons and convert-

ibles, are not too easy to sell and some auto dealers are anticipating the day when they will have to return to selling standard model cars.

Employment Cutbacks — Instances of layoffs of workers, necessitated by lagging sales, are noted. General Electric this week is cutting production by 50 per cent at its White Plains, N. Y., kitchen disposal unit plant. Reason: low sales. At Syracuse, N. Y., the L. C. Smith & Corona Typewriter Co. has reduced the workweek to 4 days for some 2000 employees, as result of declining demand. Indian Motocycle Co., Springfield, Mass., has laid off 250 of its 1050 employees and reduced operations to one shift. U. S. Time Corp. will cut its working force from 3200 to 1000 by Jan. 1, because mounting wage demands are pricing its product out of a market. Worthington Pump & Machinery Corp., Holyoke, Mass., will lay off 20 per cent of its 1000 employees.


Paradox in Appliances — While many retailers are offering discounts and premiums on household appliances, the trend in manufacturers' prices continues upward. Manufacturers argue that increasing wage and material costs necessitate the higher factory prices. Thus is created the paradox of rising prices at the factory level and softening prices at retail, a situation unlikely to continue long.

Washing machine salesmen are seeking to promote sales by offering a year's supply of soap flakes free with every sale. Deep freeze cabinet sellers offer a supply of meat or other frozen foods.

Sales Continue at High Level—Notwithstanding these symptoms of weakening, sales of appliances and similar goods continue at a high level. Many industry statisticians contend the accumulated deficit of the war years has not yet been made up.

Federal Reserve Bank of Cleveland figures that although washers have been sold at a rate of 340,000 a month for the past two years, the average monthly rate since 1941, including the war period, has been only 130,000 a month. This compares with 160,000 monthly during 1941.

Electric refrigerator distribution is now running at a rate of 340,000 a month. Yet for the past eight years the "consumption" figure comes out around 130,000 a month, as against 275,000 monthly in 1941. Radio and television sales over the past eight years are estimated as averaging 600,000 monthly, against 1 million a



GIANTS: Standing 235 feet tall, with a daily capacity of 1500 tons of iron each, these new twin blast furnaces at the South Chicago Works of Carnegie-Illinois Steel Corp. are among the world's largest. As seen from a helicopter, they form a backdrop to the iron ore and limestone storage yards as well as the ore boat unloading operations at this U. S. Steel Corp. subsidiary plant

month in 1941. Passenger car sales over the past eight years have averaged 125,000 a month, against 300,000 or more per month during most of 1940-41.

These statistics, the bank says, suggest that consumers are not yet oversupplied when allowance is made for the long period of nonproduction as well as for the postwar growth in the number of family units.

Prices rather than need is the restraining factor in sales.

Steel's Record Imposing

POSTWAR production records of industries such as the automotive, home appliance, can and container, farm the problem of the steel industry's productive capacity, Mr. Chapple said: "Any discussion of capacity today which fails to examine the problem in the light of the international situation, ignores additionally important factors, and inevitably leads to erroneous conclusions.

"No further proof of the importance of this aspect of our problem is needed than the revelation of the simple fact that in 1937, the United States accounted for 38 per cent of world production of steel, while in 1947 we produced more than 56 per cent. Experienced analysts have placed this percentage up to 59 per cent by discounting Russian claims.

"This increase has resulted largely

BIG MAGNET AT WORK: Columbia University's 2500-ton cyclotron is shown above as its huge magnet, claimed to be the world's largest to date, is operated for the first time. The cyclotron, located at Irvington-on-the-Hudson, N. Y., is expected to be completed early next year.

NEA photo

implement and many others, are a tribute to those industries, but they are a still greater tribute to the steel industry, Bennett S. Chapple Jr., assistant vice president, United States Steel Corp. of Delaware, said in an address before the Controllers Institute of America at the Duquesne Club, Pittsburgh, last week.

Mr. Chapple said that the steel industry had turned out the basic steel to support the unprecedented employment and the largest peacetime production in the history of our nation, "in spite of worn tools; in spite of shortages of manpower, scrap, coal and pig iron . . . and other retardents."

Productive Capacity - Turning to

from curtailed production in foreign countries and only in smaller part from an increase of 15 per cent in our capacity since 1939.

"If devastated nations abroad are to be rebuilt on a sound economic basis, without continuing subsidy from this country's resources, then inevitably the American steel industry must make a major contribution during each of the next several years. We have no option!

"There is another important factor that I should like to mention briefly," he said. "It is one which was unforeseen even as late as January of this year, and one which, when superimposed on the already heavily burdened distribution problem of the

steel industry, may, unless prudently handled, further disarrange our economy. This is the steel required for our defense program."

Shipbuilding Reviving

Sixty-nine vessels, totaling over 1 million tons, under construction or contracted for here

REVIVAL of interest in the United States merchant marine with resultant planning of numerous new ships is seen creating a substantial demand for products of the steel and metal-working industries.

Until about six months ago the merchant marine had been shriveling, but since then contracts have been let for approximately 60 fast tankers and five passenger ships; designing of two new "prototype" ships that could be mass-produced has been announced, and a \$65 million superliner has been planned.

A permanent ship facilities committee has been created under the National Security Resources Board to integrate the country's naval and merchant shipbuilding program on a long-range basis. Up to Oct. 1, 69 new vessels totaling more than a million gross tons were either under construction or contracted for in this country.

Planning Groups—If the new committee can successfully follow the aims set up for it, the steel and metalworking industries would be assured of a long-term demand from shipbuilders, for as W. John Kenney, undersecretary of the Navy, said, "This will give our ship designers and shipbuilders something to look forward to in the way of continuous attention and definite suport."

Record Scrap Year Seen

CONSUMPTION of purchased or open-market iron and steel scrap in 1948 will set a new high record at about 29 million gross tons, Edwin C. Barringer, executive vice president, Institute of Scrap Iron & Steel Inc., Washington, predicts.

This would be 15 per cent greater than the all-time record of 26 million tons, established in 1947. It would be one-third larger than the wartime peak of consumption.

More Purchased Scrap—"Based on Bureau of Mines statistics, the melt of home or intra-plant scrap this year will barely exceed the 28 million gross tons of last year, while pig iron will do well to equal the 52 million tons of 1947," said Mr. Barringer. "It is purchased scrap that is making possible record steel mill operating rates."

Of the 29 million gross tons of pur-

chased scrap that will be melted this year to make new steel and castings, about 7 million tons will be the waste of manufacturing operations and 4 million tons will be provided by the railroads. The remaining 18 million tons will come from auto wrecking yards, farms, wrecking operations, collectors, demolition, shipbreaking, and other sources. Imports, principally from Germany, will account for about 300,000 tons.

In addition to melting record-breaking tonnages of scrap, steel mills and foundries have put about 1 million tons into inventory this year.

Seek Way To Lower Costs

Industrial distribution forum stresses need to consider problem before volume slumps


WAYS in which producers and distributors can lower costs and bring the breakeven point down to where a substantially lower volume of business will still result in a satisfactory profit margin dominated an industrial distribution forum in Chicago Nov. 16 sponsored by the American Supply & Machinery Manufacturers' Association Inc. and the National Supply & Machinery Distributors' Association.

Entitled "After the Breakeven Point, What?" the forum, consisting of two major addresses and an afternoon-long panel discussion, stressed the immediate need for consideration of the problem, not after general business volume declines and hasty and ill-considered cost-cutting steps are mandatory.

Storm Warnings—Edwin L. Morris, partner in the management engineering firm of Booz, Allen & Hamilton, Chicago, said storm warnings are starting to be raised, that signs of a recession already exist.

Whether it comes soon or not for years and whether it is mild and of short duration or severe and long makes little difference in the planning and thinking which should now be going on in order that individual companies can prepare for it and weather it safely. Preparing now automatically strengthens a company's competitive position and renders it better able to function in today's boom times, he declared.

Need Corrective Action — Russell C. Duncan, president, R. C. Duncan Co., Minneapolis, and past president of NSMDA, addressed most of his suggestions on paring costs in anticipation of lower sales volume to the distributors present, mentioning, however, that producers must also take corrective actions if the manufactur-



BIG WELDER: Claimed by its builder, the Yoder Co., Cleveland, to be the largest electric resistance pipe welder of its type ever built, this rotating transformer, single phase, alternating current unit is to be shipped to Di Tella Corp., Buenos Aires, Argentina. The complete welder weighs more than 90 tons, and with seven forming and three sizing and straightening stands sells for around \$600,000. Pipe capacity ranges from 0.187 in. wall thickness by $4\frac{1}{2}$ in. o.d. to 0.500 in. wall by 16 in. o.d.; speeds range from 15 to 60 feet per minute. The welder transformer weighs around three tons, while the copper alloy electrodes, which are 54 in. in diameter and nearly 4 in. thick weigh one ton per pair. Two more of these welders will be built, one for Henry J. Kaiser Co. in California and one for Page-Hersey Tubes Ltd., Toronto, Canada

er-distributor team is to function properly. Among these, he suggested that producers check to see that if f.o.b. mill pricing is being used the distantly located distributors are getting a fair break on proposed resale prices; that factory representatives should now be stepping up their distributor training efforts.

Chairman of the program was Ralph M. Johnson, vice president and general sales manager, Norton Co., Worcester, Mass., and moderator of the panel discussion was Harold E. Torell, vice president, Syracuse Supply Co. J. G. Geddes, president, ASMMA, and E. H. McLaughlin, president, NSMDA, spoke briefly on the purposes of the forum.

Defense Steel Assured

EXTENSION of the three voluntary allocations programs providing steel for national defense is virtually assured as result of public hearings Nov. 15 at which no objections were expressed.

These programs call for 102,505 tons monthly for the armed forces, 16,244 tons monthly for Atomic Energy Commission projects, and 1926 tons monthly for requirements of the National Advisory Committee for Aeronautics. The extension calls for continued deliveries in these quantities up to Sept. 1.

In the meantime, Commerce officials believe, Congress will provide the President with adequate authority to continue obtaining steel for purposes the government identifies as essential—whether by voluntary or mandatory allocations.

Way Cleared—The way for extension of the other seven programs which were set up under voluntary allocations agreements was partially cleared recently by a letter from Attorney General Clark authorizing Secretary Charles Sawyer to use the same "procedure" under which extension of the three defense programs was arranged.

Whether the programs will be extended depends on whether the Steel Producers Advisory Committee consents to such an extension.

These remaining programs cover requirements for freight car construction and maintenance; warm air heating equipment for residential housing; pig iron for certain products for residential housing; steel for barges and towing vessels; steel for tank and oil field production equipment; steel for the anthracite industry; and steel for oil tankers.

Committee Named—A 17-member oil terminal and bulk tank storage industry advisory committee has been appointed to advise and consult with the OIC.

Pricing Dislocation Pictured

Witnesses tell Capehart committee how change to f.o.b. mill pricing has handicapped steel buyers. Many consumers now paying higher delivered prices for material

SEN. Homer E. Capehart (Rep., Ind.), chairman of the Senate Trade Policies Committee, declared last week that Congress should pass a law to permit business to absorb freight as it sees fit so long as there is no collusion or conspiracy involved.

He said his committee "has definitely established" that the basing point ban benefits big business to the detriment of small business and that the Supreme Court decision will have a tendency to centralize industry instead of decentralizing it.

These opinions were expressed following committee hearings on the effects of the Supreme Court decision and Federal Trade Commission rulings on pricing practice in the cement and other industries.

If expressions by witnesses before the Capehart Committee represent the thinking of a representative cross section of industry, the impact of the Cement decision on the American economy is going to be much more profound than has been generally realized.

Witness after witness has testified that abandonment by just one indus-

try, steel, of its traditional multiple basing point delivered price system, and the adoption of f.o.b. mill prices, is having these consequences: Many consumers have been dropped by their old sources of steel supply and are having a hard time in obtaining even reduced supplies; many now can get steel only from one mill as compared with the old setup under which, when mills equalized each others' delivered prices, they could get it from various mills; many consumers, because of the new f.o.b. mill prices, have to pay substantially more for their steel due to the higher freight rates; and many consumers are losing out in competition with competitors who are more favorably situated under the f.o.b. mill price system.

Issue for Other Industries — The same things that have happened in the steel picture are reflected in cement. Further, all other basic industries in America are faced with this price issue and can expect sooner or later to become affected. Unless Congress modifies the law, sweeping business-relocation and population shifts are in the wind. On the one

hand, there will be ghost towns and cities. On the other, there will be great and increasing concentration of industry at such centers as Pittsburgh with its current excess steelmaking capacity.

Attending the hearings were congressmen not connected with the Capehart committee but who came to Washington especially because of fears that, unless the Cement decision is cancelled out by remedial legislation, their states or districts are going to lose industries. One of these, Rep. Noah M. Mason (Rep., Ill.), took the stand in an appeal for action to prevent his native Oglesby, Ill., from becoming a ghost town. Oglesby, he said, has 4000 people who depend for their livelihood on two cement mills; if the Cement decision stands, he said. Oglesby will have to fold up. because cement mills at other locations have a lower freight rate to Chicago and other large consuming centers.

"If the decision stands," he said, "our people will lose their jobs; they will lose their homes because nobody will want to buy them. Further, they will have to move to some place where there are no homes for them."

FTC Not Encouraging—Walter B. Wooden, associate counsel for the Federal Trade Commission who steered the Cement case and numerous other commission actions, told the committee that, as the law and its interpretation now stand, a businessman can be certain that he is not violating the law only by quoting f.o.b. mill or factory prices.

Mr. Wooden said that as far as he has knowledge the commission has no intention of attacking the sale at uniform prices all over the country of countless small articles the public buys—like chewing gum, candy bars, safety razor blades, etc. Rather, he admitted, the commission is concerned with heavy goods like steel and cement. But when Senator McMahon (Dem., Conn.) asked him about a flat price on a newspaper irrespective of where sold, he admitted that in such a case there certainly is price discrimination.

Questions Illegality of Freight Absorption — Another interesting and significant point was made by Lynn C. Paulson, assistant trial attorney for the Federal Trade Commission, and the commission's trial attorney in the current steel case. Businessmen are more scared than they need to be, he said, because they have read into the Cement decision things that it does not contain. The fact of the matter is, said Mr. Paulson, that the Supreme Court has not yet passed on the legality of freight absorption. That issue is involved in the Rigid



GOLDEN ANNIVERSARY: Reminiscing over the 50-year history of the Mesta Machine Co., Pittsburgh, are J. R. Berg, vice-president, F. A. Mesta, vice-president and treasurer, Lorenz Iversen, president and L. W. Mesta, executive vice-president, the present officials of company. The organization was formed on Nov. 21, 1898, by George Mesta when he effected a consolidation of Robinson-Rea Mfg. Co. and Leechburg Foundry & Machine Co. Since that time the company has been favored with an ever increasing volume of business and its growth has paralleled that of the great American industries which it serves

Steel Conduit case; Count II in that case charged that it was illegal for two or more sellers to systematically match delivered prices by receiving varying mill nets, even though this condition was arrived at by independent action, without collusion. The Circuit Court of Appeals decision in this case failed to pass on this issue, so that it is up to the Supreme Court to make a ruling. Mr. Paulson criticized the commission's order in the conduit case for assuming that suppression of competition is the inevitable result of matched prices.

Making it clear that he was not speaking for the commission, Mr. Paulson declared that in his opinion sellers should be encouraged to compete for business, and to absorb treight to do so.

Industry Ready To Move-One of the impressive witnesses was C. A. Winslow, ex-mayor of Watertown, N. Y. The mainstay in that city, he said, is the New York Air Brake Co. which, as a consequence of the Cement decision, has taken an option on a Pittsburgh district site and is getting ready to move its plant there. That the Cement decision applies to steel warehouses just as much as t applies to the mills was brought out by Johns H. Congdon II, vice president, Congdon & Carpenter Co., Providence, R. I. The effect is to force this company to sell within its freight rate territory since it cannot afford to incur the danger of triple damage suits which might be brought if the company were to absorb freight.

Steel Trade's Views—Steel industry spokesmen were a unit in declaring that no merit whatever is reflected in the industry's forced adoption of an f.o.b. mill pricing policy.

The steel men asked that Congress legalize freight absorption to permit free competition for business n all parts of the country without regard to freight rate advantages or lisadvantages. Unless freight absorpcion is permitted, they said, some steel producers will thrive on the pasis of local monopolies—but others will be driven out of business when normal competition again is reflected n the sale of steel. And the trend coward local monopolies will be intensified as more and more consumers locate their plants in the back yards of steel mills.

Plant Location—No answer to the present problem is to be found in moving steel plants, as some interested parties have predicted. First, it now costs \$200 to \$300 to construct capacity for producing one ton of finished rolled steel—which is about 2½ times the cost in the 30s. Sec-

INDUSTRY'S HELP NEEDED

ALTHOUGH the Capehart committee hearings are excellently organized to assist newsmen in their coverage, the stories published to date have been disappointing. Full implications of the recent court interpretations have not been brought home forcibly to the public.

Here is a situation where manufacturers can help. Industrialists whose security is threatened by the necessity of selling within a narrow territory can help develop public understanding of their problem. Where manufacturers and businessmen are forced to withdraw from markets, they should give full details to their local newspapers and other publicity media, and to the local board of trade or chamber of commerce, to local civic officials, to the Capehart committee and to their representatives in Congress.

Proponents of remedial legislation to cancel out the effects of the Cement case decision believe such a campaign will be necessary to force consideration of such legislation by the 81st Congress.

ond, steel producing plants must continue to be located, as at present, at points where raw material assembly costs are favorable.

On two other points the steel men agreed; conspiracy and collusion in the fixing of prices should continue under legal ban, and the charging of phantom freight under no circumstances should be permitted. The big distinction, it was pointed out, is that a charge for phantom freight is a fictitious freight—as charging railroad freight rates when deliveries are made by truck at lower cost—whereas freight absorption is a concession by the mill to get business at remote points to which competitive mills have a lower freight.

Must Be Systematic-The steel men also agreed that it is not feasible to follow a policy of meeting competitors' delivered prices in individual instances in good faith. The green flag on meeting of competitors' delivered prices is good only if such practice may be pursued in a systematic way. To hold a customer not in your freight territory, it was pointed out, you must supply him regularly with all or a certain portion of his requirements, which means you have to follow a systematic policy of selling to him at the lowest delivered price of a competitor. You lose your customer when you are unable to sell him consistently at the competitor's price.

Tobin Sees Another Wage Round

THE TRUMAN administration expects a fourth round wage increase. Secretary of Labor Maurice J. Tobin tacitly admitted as much at last week's AFL convention in Cincinnati when he stated that earnings of some 16 million workers are 9 per cent behind the third round of postwar wage increases already received by mass industry employees.

Answering a news conference question as to whether a fourth round of increases is inevitable, Mr. Tobin replied that in certain fields "workers haven't received a third round yet." In business circles, executives generally are now agreed that new demands are practically certain. One business research organization predicts that the increase finally agreed upon will range from 7 to 10 cents an hour.

To Cash in on Elections—Behind-the-scenes activity at Cincinnati reveals that AFL leaders are planning heavy pressure on Congress and a supercolossal publicity drive to cash in on the recent elections. Repeal of the Taft-Hartley Act and raising of the minimum wage are, of course, the main objectives. Representatives of the Screen Actors Guild are well represented on the union's publicity committee, and a 10-cent levy on all AFL members is expected to provide a \$1 million publicity fund.

CIO Meets in Oregon This Week

CIO MEMBERS have been pouring into Portland, Oreg., in a holiday mood for their annual convention which begins today. The present outlook is that they will do these things at the meeting:

Celebrate the election of President Truman and a Democratic Congress.

Continue the Political Action Committee.

Whoop it up for repeal of the Taft-Hartley Act.

Re-elect Philip Murray as CIO president. Now 62, Mr. Murray is ending his eighth year as president. He will probably be unopposed.

Come out clearly for the Marshall Plan. Attack high prices and profits. Approve a legislative program for the 81st Congress.

Urges Help for Small Business

Congressman Ploeser tells tool and die men at Milwaukee convention that government agencies should be set up to assist small and medium size firms

THE Department of Commerce and the Federal Trade Commission should be overhauled in the interest of much more help to small business men, such as tool and die makers, who cannot afford elaborate statistical and marketing setups, and who must be protected from competition of the "steamroller" variety.

That was what Congressman Walter C. Ploeser (Rep., Mo.), chairman of the House Small Business Committee, said last week speaking to more than 200 members of the National Tool & Die Manufacturers Association in convention at Hotel Schroeder, Milwaukee.

The congressman, who characterized the tool and die men as a group typical of small and medium size entrepreneurs that make up the backbone of American industrial enterprise, urged that the State Department be strengthened as an agency for development of foreign trade. His experience on trips abroad has been that attaches all too often have no sense of responsibility to business men and take a supercilious attitude toward them. Their opposite numbers from England, however, are boosting British trade at every opportunity.

Improve Services — Mr. Ploeser urged, too, that technical services of



J. J. KOHL

the Bureau of Standards, the seized foreign patents and technical information and certain researches by the Office of Technical Services be made more readily available to small manufacturers who cannot afford large research and engineering departments. In conclusion he said: "Politically speaking, small business doesn't want 'handouts', nor does it want price control."

Another speaker at this third national meeting of the association who touched on the international situation as it affects American business, was A. G. Bryant, vice president, Cleereman Machine Tool Co., Green Bay, Wis., and immediate past president, National Machine Tool Builders' Association. Mr. Bryant, who has just returned from Europe, reiterated his conviction that foreign aid under the Marshall Plan immediately should be shifted from consumer goods which satisfy immediate appetites to capital goods which will make for permanent recovery. America must tell Europeans how to spend Marshall Plan funds, as well as furnish these funds, said Mr. Bryant.

Management—The meeting, which went on from Sunday, Nov. 14 through Wednesday Nov. 17, largely was devoted to inspiring management and marketing methods among contract tool and die shops which not only will prevent destructive competition among such shops but which also will lead more production shops to rely on the contract shops as complete services for production tooling.

Representing, as it does, about 500 leading tool shops, this association already has made great headway in developing the art of quoting on tool and die work from mere "guestimating" to estimating based on sound knowledge of costs and overhead expenses.

One of the most interesting sessions was that on Tuesday afternoon, devoted to incentive plans in the tool and die industry. S. A. Peck, executive vice president, Trundle Engineering Co., Cleveland, was the guest speaker, basing his talk on consulting work by his company in the shop of one of the association members. An open forum was held on estimating which proved that "snap quotations" on a given job ranged all the way from 50 to 300 hours.

Methods of breaking down a job operation by operation were discussed.

Officers of the Association for 1948-49 were installed as follows: President, J. J. Kohl, president, International Tool Co., Dayton, O.; first vice president, Centre W. Holmberg, president of Aug. W. Holmberg & Co. Inc., New York; second vice president, R. H. Cope, manager, Bunell Machine & Tool Co., Cleveland; treasurer, J. H. Stanek, treasurer of Stanek Tool & Mfg. Co., Milwaukee; secretary, Alfred Reinke, vice president, Gus Reinke Machinery & Tool Co., Hillside, N. J. George S. Eaton was reappointed executive secretary.

By vote of the membership NTDMA is to be incorporated under the laws of Ohio as a nonprofitmaking organization.

Remarks Incorrectly Reported

REPORT in Steel, Nov. 8, page 62, of the panel discussion at the recent joint meeting in Chicago of the Blast Furnace & Coke Association of the Chicago District and the Eastern States Blast Furnace & Coke Oven Association, in which a 2000-ton per day blast furnace was discussed, incorrectly stated the remarks of William S. Unger, Carnegie-Illinois Steel Corp., Pittsburgh.

Specifically, Mr. Unger's remarks should have read: (1) The height of a stove containing checkerwork 110 ft high would be about 130 ft high. (2) Total heating surface of the blast furnace stove usually is based on 500 sq ft per ton. (3) Working volume of a 2000-ton furnace should be about 55,900 cu ft.



CENTRE W. HOLMBERG

oal Gasification Pushed

Full-scale research into coal conversion launched with opening of Library, Pa., pilot plant

FULL-SCALE research into converion of coal to synthetic gas for facories and homes and for providing numerous important by-products was aunched last week with opening of pilot plant at Library, Pa.

The \$500,000 plant, financed jointy by Pittsburgh Consolidation Coal Co. and Standard Oil Co. of New ersey, is said to be the first of its tind. Successful operation of the bilot plant may result in eventually revolutionizing the soft coal industry, t is said.

The Library plant will concentrate on finding methods of lowering the cost of converting coal into gas. Not only is the gas useful for fuel but from it can come gasoline, diesel uel, tar products and chemicals for the plastics industry.

Coal Processing—At the ceremony opening the pilot plant it was predicted that perfection of continuous soft coal processing methods now being tested will increase the dollar value of mined coal by the chemical recovery of valuable organic materials before coal is burned for its neat values in the usual manner.

Gasification at the new pilot plant s accomplished through reaction of steam and oxygen with fluidized coal at a high temperature. The product s a mixture of carbon monoxide and hydrogen. In commercial production the gas could be sold for low-heat content uses such as steel, glass and cortick making; enriched to the equivalent of natural gas; or fed to a reactor for production of gasoline, oils and chemicals.

Look For Answers—It's not known yet how long it will be before construction of a full-scale commercial plant can be contemplated or how great its capacity could be, but these answers are expected to be arrived at through research at the pilot plant.

George H. Love, president, Pittsburgh Consolidation, said that "while growing energy demands are expected to increase the use of coal in solid form, establishment of new uses will add security to the industry's future."

Kaiser Acquires Steel Plant

PURCHASE of the Phoenix-Apollo Steel Co. steel plant at Phoenixville, Pa., for approximately \$3,600,000, was announced last week by the Kaiser-Frazer Corp. Edgar F. Kaiser, general manager, said the contract becomes effective Dec. 31.

Plant includes 6 open hearth furnaces, a blooming mill, two finishing mills and a structural mill. Present monthly output is about 26,000 tons of steel products.

Plans call for formation of a new corporation to operate the plant at Phoenixville, with present management retaining supervision. The new company will be headed by David Thompson who now is president of the Phoenix-Apollo company.

At the same time the Phoenix Bridge Co. will continue in operation as in the past under the direction of Clyde MacCornack, vice president and general manager.

This latest purchase by Kaiser-Frazer is another move in its effort to acquire adequate steel supply to support its automobile manufacturing operations. The Phoenixville plant will enable Kaiser to turn a substantial part of its pig iron supply into semifinished products, thus eliminating some of the costly bartering for steel which the company has been forced to engage in since it started in business.

Recently Kaiser-Frazer leased a government-owned blast furnace at Cleveland operated by Republic Steel Corp. This furnace has capacity to produce about 38,000 tons of steel-making iron monthly. It is being operated by Republic at present under an agreement with Kaiser, but this agreement is scheduled to expire in a few months. Meanwhile, Republic Steel is continuing its fight to obtain possession of the plant.

Battle For Ohio Canal Renewed

HEARINGS were held last week by United States Army engineers on the proposed \$439 million Lake Erie-Ohio River canal. This represented renewal of a 31-year battle which has been waged between opponents and proponents of the 105-mile waterway. Army engineers estimate it would take nine years to construct and complete the inland waterway.

The canal would extend from Beaver, Pa., on the Ohio river and Ashtabula, O., on Lake Erie and would follow the courses of the Mahoning and Grand rivers. It would provide a navigable water link between Lake Erie and the Gulf of Mexico.

Most opponents of the project are banded together in the Upper Ohio Valley Association which has labeled the canal "costly and unnecessary," adding that it would amount to \$110 million more than the cost of the Panama canal. Groups favoring the project are organized in the Ohio River Improvement Association. The hearings were based on a report submitted in August, 1947, by Col. Walter E. Lorence, then district engineer for the Pittsburgh area.

Upholds Portal Pay Ban

REFUSAL by the Supreme Court last week to review the decision of a lower court that the law passed by Congress in 1947 retroactively canceled overtime "portal-to-portal" pay claims, upheld, in effect, the congressional action. Questions were raised at the time of the law's passage as to whether Congress had the right to make the law apply retroactively.

The law was passed while the suit of employees of B. H. Hubbert & Son Inc. was pending and the Federal District Court in Baltimore dismissed the pay claims on the company's contention that the new law barred them. The Circuit Court in Richmond, Va., upheld the District Court, causing the employees appeal to the high tribunal.

Although it refused to review this case, the Supreme Court at the same time deferred action on a request by a group of employees of General Motors Corp. that it rule on the constitutionality of the act. Their claims were thrown out by the District Court in Buffalo, and the Circuit Court in New York also upheld the lower court.

Plating Laboratory Opened

FORMAL opening of Hanson-Van Winkle-Munning Co.'s electrochemical laboratory at Matawan, N. J., was observed Nov. 17 with company-conducted inspection tours of the new building, a dedication and a reception on the premises. The laboratory with more than 15,000 sq ft of floor space in its three stories was specifically designed and erected for carrying on experimental and service work in the electroplating and polishing field.

Complete apparatus for experimental and sample cleaning, pickling, plating and anodizing is located in the plating room on the first floor. Most of the final tests from which will come concrete recommendations and contributions to the industry will be conducted here.

On the second floor of the building is located a large analytical laboratory devoted primarily to customer service, involving the analysis of plating solutions and investigating difficulties encountered in the application of electrodeposits.

Incoming Democratic legislators decline comment on legislative prospects pending word from White House on key measures. Radical ideas of some members worry business

THAT it won't be long now before the all-Democratic government takes over at the throttle is brought to mind by the sight of the crew of carpenters busy erecting, at a cost of \$80,000, the stands for the inauguration ceremony to take place Jan. 20 in front of the capitol.

Also, numerous Democratic congressmen are in Washington now that the election is over. Some of them are here to renew leases on apartments, newly elected members are looking for living quarters, and many others just like to be in Washington.

Asked to comment on legislative prospects, most of them say frankly that the key bills-repeal or amendment of the Taft-Hartley Act, allocation of scarce commodities, control of prices and other anti-inflation factors, public housing, expansion of social security, broadening of the reclamation program, establishment of permanent price supports for farm products-will come from the White House. That seems to be the dominant note among the exultant Democrats-that the big thing that came out of the elections is the mandate the people gave to President Truman.

To Keep Promise - For example, when Sen. Elbert Thomas (Dem., Utah), slated to be chairman of the Senate Labor Committee, was asked whether the Taft-Hartley Act would be repealed outright or amended, he merely said that the Democratic campaign promise would be kept, and that a labor bill was being prepared by the administration. Numerous other congressmen have commented to the same general effect; they have some ideas of their own, but usually wind up with the opinion that the main legislative program will not be launched until President Truman sounds the pitch.

President Truman's program is expected to be hard enough for many business men to swallow. However, business men appear due for considerable worry when they read next year about what is going on in Congress. This is because of radical ideas held by some of the congress-

O'Mahoney To Take Over - Among returning senators is Joseph C. O'Mahoney (Dem., Wyo.) who is due to

succeed Senator Robert A. Taft (Rep., O.) as chairman of the Joint Congressional Committee on the Economic Report. In this position Mr. O'Mahoney will probably hold the public eye as he did when he was chairman of the old Temporary National Economic Committee. The Committee on the Economic Report, it will be recalled, is the one that specializes on a study of the instruments the government may or could use in directing the economic trend-as fighting inflation on the one hand or deflation on the other.

Here is part of the anti-inflation program which Senator O'Mahoney proposes to introduce in Congress, according to what he told a press conference a few days ago: 1-He will introduce a peacetime profits tax similar to the bill he introduced at the last session, "to collect what are really excess profits, without hampering small business production"; 2-He will again introduce the O'Mahoney-Mansfield bill to provide a "cooling-off" period before price increases can become effective; large producers of basic cost-of-living items "from cigarettes and meat products to window panes" would have to give advance notice of price increases and justify the increases in public hearings.

Not Alone - Whether Senator O'Mahoney's ideas will be enacted into law cannot now be told. But he is not alone in advocating restoration of the excess profits tax, and the holding of hearings to investigate contemplated price increases. His idea about forcing manufacturers to give advance notice of price increases has the approval of organized labor, which insures that it at least will receive careful consideration, Furthermore, it fits in with the Truman philosophy in connection with the three postwar rounds of wage increases—that these wage increases should have come largely out of profits without necessitating general price increases.

Many of the spokesmen for business in Washington feel somewhat pessimistic as to the outlook for legislation of the above type. Some fancy ideas are expected to be proposed when antiinflation proposals come up next year, and particularly when mention of the recent record-breaking profits of many corporations are mentioned in congressional debate. The next session is sure to be a trying one as far as business men's nerves are concerned.

Basing Point Report Available

ONE of the best available reports on the confusing situation resulting from recent Federal Trade Commission and Supreme Court orders and decisions in cases involving basing point price systems has been published by the Chamber of Commerce of the United States, and copies may be obtained by addressing the chamber's headquarters in Washington. Result of work by the chamber's Committee on Economic Policy, the report merely analyzes the whole situation and makes no recommendations. The purpose is to inform all interested parties as to the nature of the situation surrounding pricing policies and thus stimulate sound thinking on the subject.

In addition to issuing the above report, the chamber's second 1948 economic institute, to be held in the chamber's auditorium in Washington Dec. 9-10 is to focus on "Delivered Pricing and the Future of American Business." Clarification of the arguments and divergent viewpoints will be undertaken by leading students of the delivered pricing problem; they have been chosen from the fields of business, law and economics.

Completes Oxygen Plant

THE FIRST tonnage oxygen plant to be used for coal gasification purposes in this country will be placed in operation within the next few weeks at the Coal-to-Oil Demonstration Plants of the Bureau of Mines at Louisiana, Mo.

Originally used by the I. G. Farbenindustrie in making acetic acid and other chemicals at Hochst, Germany, this modern Linde-Frankl unit was dismantled and shipped to the United States complete save for building, piping, and other materials available here. The plant, which will extract oxygen from the air, has a capacity of 23,000 cubic feet or 1 ton per hour of 98 per cent oxygen. A 50,000 cubic foot gas holder also has been erected.

In general, this unit is similar to other Linde-Frankl plants built by the Linde Gesselschaft fur Eismachinen. It has, however, an auxiliary small column for the production of pure nitrogen which was re-



multiplied daily production nearly 3 times

hardness	54-56 KC		
	previous method	flamatic method	

47 seconds

22 seconds

hardening time





800 gears—a day's production

Boxed, stacked, and ready to ship are 800 spur gears—one day's production on the Cincinnati Flamatic Hardening Machine serving the O. T. Muehlemeyer Co., Rockford, Ill., heat treater who likes to keep customers happy with prompt deliveries. This spur gear (6½" O. D., 36 teeth, 6 pitch, ½" face, SAE 8640) is Flamatic hardened in the range of 54 to 56 Rc (50 Rc minimum specified) to a depth of approximately ½". Root sections and core are unaffected. Distortion, negligible.

• Operator loads gear on arbor, presses button, and Flamatic takes over: heats surface to within plus or minus 5°F of preset value (controlled by Flamatic's exclusive electronic eye) then arbor retracts and the gear is deposited in oil quench. Part after part, run after run, results are uniformly satisfactory. • Perhaps Flamatic selective surface hardening can—for you—step up schedules, improve product uniformity, cut costs, up profits. Write for interesting Catalog No. M-1611-1.

THE CINCINNATI

flamatic

HARDENING MACHINI



quired in chemical operations at Hochst.

The Linde-Frankl plants differ basically from the conventional oxygen plants in their use of regenerative-type exchangers instead of continuous-flow, recuperative-type heat exchangers. These Linde-Frankl regenerators are steel vessels packed with coils of corrugated aluminum strips, which perform the same function as the checker-bricks in a watergas machine superheater, alternately absorbing and giving up heat.

Incoming air is chilled to more than 300 degrees below zero (Fahrenheit) as it flows past the aluminum packing in one pair of regenerators. Meanwhile, in another pair of regenerators, outgoing product oxygen and nitrogen is cooling the aluminum packing in preparation for the next incoming air cycle. Valves are reversed every three minutes. Then frost and dry ice left on the cooling surfaces by condensation of moisture and carbon dioxide in the air is swept away by the oxygen and nitrogen streams. Regenerative exchangers thus eliminate the need for chemical removal of moisture and carbon dioxide.

Briefly, the coal gasification cycle in which the Linde-Frankl unit will be used involves first crushing, pulverizing, and drying the coal. The pulverized coal then is fed to a reactor, together with oxygen and steam or carbon dioxide. Under high temperatures, the mixture reacts toform synthesis gas—the carbon monoxide and hydrogen required in the Fischer-Tropsch process and a source of hydrogen for the coal hydrogenation process of producing synthetic liquid fuels.

Ball Quits Interior Post

MAX BALL, who has had as much to do with the formulation of government petroleum policies during the past four years as any other one man, has resigned as director of the Interior Department's Oil & Gas Division effective Dec. 1. He came to Washington in October, 1944, as assistant to Ralph K. Davies, then head of the Petroleum Administration for War. Later he succeeded Mr. Davies and continued to head up the successor organization after the war. Mr. Ball will set up in Washington as a consulting petroleum geologist.

Radioactive Tracer Handbook

METALLURGISTS and others who make use of radioactive tracers in their research work will be interested in a new government book entitled



SENATE LEADER? Sen. Scott W.
Lucas of Illinois is a candidate
for Democratic floor leader of
the Senate in the 81st Congress,
replacing Vice President-elect
Alben Barkley. NEA photo

"Handbook of Radioactivity and Tracer Methodology."

Copies can be ordered from the Office of Technical Services, Department of Commerce, Washington 25, D. C., at \$20 each, payment to be made to the order of the Treasurer of the United States.

The book contains 900 pages, with subject matter arranged in these three divisions: Nuclei and radioactivity; measurement of isotopes; and biological and medical applications of isotopes.

Concerned not only with tracer techniques, it deals with fundamental concepts of nuclear physics, isotope production and instrumentation. It contains numerous references to work done with cyclotron produced isotopes. In fact, the book was conceived and executed with the aim of making it a standard laboratory reference where isotopes are used.

Hoffman Optimistic on Revival

EUROPEAN economic co-operation was just a hope six months ago, but today it is a fact, Paul G. Hoffman, administrator of the Economic Recovery Administration, told the National Foreign Trade Convention recently in New York.

Europe within four years can become "reasonably prosperous" by European standards, he said, adding that there is no such possibility unless the development of intra-European trade is encouraged. Mr. Hoffman said that industrial production in Western Europe was 12 per cent ahead of 1947; electric power output 10 per cent; and steel production 27 per cent.

A co-ordinated effort by American government and business to increase our purchases from abroad was urged at the meeting.

Industrial Plants "Mothballed"

FEDERAL Works Agency has been appointed as custodian for 11 surplus war plants. These warborn facilities have been transferred into the National Industrial Reserve by War Assets Administration.

The plants comprise the first group to be transferred to the reserve, and after reconditioning they will be "mothballed" for potential use in case of an emergency. Properties, listed according to wartime operator and location, are: Amco Magnesium Corp., Wingdale, N. Y.; Badger Ordnance Works, Baraboo, Wis., Bethlehem-Lebanon Forge Co., Lebanon, Pa.; Diamond Magnesium, Painesville, O.; Dow Chemical Co., Freeport, Tex.; Gary Armor Plate Plant, Gary, Ind.; Magnesium Reduction Co., Luckey, O.; New England Lime Co., Canaan, Conn.; Permanente Metals Corp., Manteca, Calif.; Oklahoma Ordnance Works, Pryor, Okla. 1.0

Transfer of these three additional plants will occur soon: Kentucky Ordnance Works, Paducah, Ky.; Keystone Ordnance Works, Meadville, Pa.; Plum Brook Ordnance Works, Sandusky, O.

Report on Jap Technical Groups

ORGANIZATION and history of Japan's three major scientific and technological societies are described in a report prepared by the staff of the Supreme Commander of the Allied Powers and now available to the public. The societies are the Imperial Academy of Japan, the National Research Council, and the Japanese Society for the Promotion of Science.

The Imperial Academy was founded in 1897 and is primarily honorific. The National Research Council was organized in 1920 in an attempt to keep pace with the evident demands of modern business and technological development. The Japanese Society for the Promotion of Science appeared in 1931, and was formed as an expedient with support coming from the highest government officials to keep Japan's technological and ideological progress in phase with moving world events.

Politics in Foreign Industry

British nationalization, German ownership issue, French strikes indicate political influence

AMERICAN metalworking executives, sensitive to the increasingly important role politics may play in United States business, are watching the political developments which are influencing British, German and French industries.

In Britain the Conservatives are marshaling forces against the steel nationalization bill. In Western Germany, France is protesting the new British-American plan to return Ruhr industry to German ownership. In France the effects of the politically inspired coal walkout are still being felt in other segments of the economy although the strike generally has been broken.

Great Britain

WHILE Britain's Conservatives prepare for a last-ditch stand against steel nationalization, the British Iron & Steel Federation declared the industry's readiness "for further constructive development of public cooperation."

In some quarters this statement was seen as an acceptance by the industry of its inevitable fate. In any event, the announcement was interoreted as a cautious hedge on the future. Conservatives will vote solidy against nationalization, and the Liberal party will also probably opoose. A few members of the government party are also expected to vote against, or at least abstain from votng. Nevertheless, Labor's overwhelmng majority assures passage, and the Lords can do little more than delay t. Conservatives, however, pin most of their hopes on the next general election which follows immediately ipon the "vesting day" set for May i, 1950. In this election the Conservatives may gain enough seats to verthrow the measure.

Western Germany

BRITISH and American authorities have announced a huge interim reorganization plan under which the Ruhr's coal, iron and steel industries will revert to German ownership and control in the near future.

The French protested almost immediately. They felt the decision would be a threat to French hopes for international control of the Ruhr. The British-American plan affects all the coal, iron and steel industries in their occupation zones. Since the



FURNACES STOKED AGAIN: Industrial furnaces in France are being stoked again as result of the truce in the French coal mine dispute. The mine stoppage contributed heavily to the faltering in French recovery.

NEA photo

war these basic industries have been owned technically by the military governors of the two zones.

Under the re-organization plan, the governors are retaining certain control powers but are setting up new companies to operate the industries. Many of the newly established independent steelmaking companies will be re-integrated into the parent concerns. About eight to 14 independent, but vertically integrated steel companies will take over the Ruhr. Each new firm will have about 1 million metric tons of raw steel capacity annually; each will include rolling mills and other finishing capacities in order to assure a well-balanced structure from pig iron production to finished products. Some of the smaller American steel firms will serve as a vardstick for the organizational and facility setup in Germany. The question of how the trade unions and the old Ruhr companies will participate in the new arrangements is still up in the air.

The plan specifically bans from positions of ownership and control persons who permitted or encouraged the Nazi party. The announcement stressed the interim nature of the plan and said it would not prejudice any future decisions by a German government as to whether the industries should be socialized.

Although France is protesting this plan, she has also agreed on the delivery of Lorraine and Normandy iron ores to the Ruhr, Although only several hundred thousand tons are involved, the political aspects of the

deal may be important because hereby the French tacitly agree to the preponderance of the Ruhr in European steelmaking. Heretofore, the French have insisted that the ores were needed for its own steel industry.

October iron and steel production hit 610,254 metric tons of ingots, compared with 571,714 in September. Ruhr production for the first time since the war exceeded French output. The annual target of 10.7 million tons of ingots for the Ruhr may be boosted to 12.5 million tons. Pig iron output for the month was increased from 468,714 tons to 508,594.

France

AS OF Nov. 1 France had lost 3,600,000 tons of coal as a result of the strikes.

The strikes, although about over, hit electricity output, and production in heavy industries has been curtailed. Output of pig iron fell from 602,000 tons in August to 507,000 in September, which is still 101 per cent of September, 1938, production. output dropped from 601,000 tons in August to 550,000 in September, or 108 per cent of the tonnage for September, 1938. Hot-rolled steel, however, showed a production advance, with 414,000 tons turned out in September, compared with 371,000 in August. Only 7217 automobiles rolled off French assembly lines during September, compared with 7284 in September, 1947, and the 15,200 monthly average for 1938. However, 7652 commercial vehicles were manufactured during the month, compared with 6893 in September, 1947, and the 3750 monthly average for 1938.

Foreign Trade To Get Aid

FOREIGN trade will be stimulated as a result of the recent national elections, according to consensus in New York trade circles. The Democratic executive and administrative branches of the government are expected to strengthen the position of the Economic Co-operation Administration,

Reciprocal Trade - Foreign trade interests expect a strong revival of the Reciprocal Trade Agreements Program and a probable extension of the permissive act for three years instead of one. Congress also may restore the President's power to negotiate trade agreements without requiring hearings by the Tariff Commission and a report by the President to Congress.

Negotiations which are scheduled to begin in Geneva next April with 11 additional countries are expected to result in further tariff cuts through multilateral agreements rather than bilateral agreements. Conclusion of these agreements would bring the total to 34 nations under the General Tariff & Trade Agreement.

The State Department will hold hearing beginning Dec. 7 on proposed tariff cuts on several hundred products which it listed recently.

Adoption of the International Trade Organization Charter is more likely with Democrats in control of Con-

September Exports Decline

DESPITE heavier shipments under the Marshall Plan. U. S. exports in September declined for the third straight month and reached the lowest point in nearly two years. The Commerce Department reports that September, shipments fell to \$926.5 million, \$61.7 million below August.

Major factor in the decline was a decrease of \$40.8 million in the Army's shipments of civilian relief supplies for occupied areas which were at \$60.8 million in September.

Imports of goods from other countries at \$558,2 million for the month were off \$40.2 million from August. Although imports decreased, the export surplus figure which was \$368.3 million for September, was the smallest since October, 1946. This reflected a long continued movement of exports and imports toward a closer balance.

Exports during the first nine

months of 1948 were 19 per cent below the same period of 1947 while general imports were 24 per cent above the 1947 level.

Canada achieved a favorable trade balance with the United States of \$11.4 million in September, the first credit balance since August, 1945.

Report Steel Export Drop

Overseas ferrous shipments continue decline in August. Year's total also below 1947

IRON and steel exports declined still further in August to continue the downward trend started the first of the year. Total ferrous exports for the month aggregated 308,484 net tons, compared with 320,190 tons in July and 525,853 tons in August, 1947.

Overseas shipments for the first

eight months of the year are almost 1.3 million net tons below those for the corresponding period in 1947. Sizable declines in shipments for this period are noted in most categories, with major reductions being in ingots, blooms, billets, slabs and sheet bars; concrete reinforcing bars; steel bars (excluding alloy); black steel sheets and rails.

Increased shipments, however, were recorded in a few categories during the first eight months of this year compared with the corresponding period in 1947. Leading the list was tin plate and tagger's tin which not only increased more than 50,000 tons over last year but led all ferrous products in tonnage exported during the period reported. Seamless casing and oil line pipe with an increase in shipments of more than 70,000 tons recorded the largest increase both in tonnage and percentagewise.

U.S. EXPORTS OF IRON AND STEEL (Net Tens)

(LICE AUM)	A	Eight Months Total—1948	Eight Months Total—1947
Semi-Finished and Finished Products:	August	10121-1346	10041-1011
Ingots, blooms, billets, slabs, sheet bars	14,380	169,995	314,672
Wire rods	2,814	28,920	40,607
Skelp	7,081	38,930	45,128
Iron bars	70	3,105	29,588
Concrete reinforcement bars	10,547	94,570	169,021
Steel bars. cold finished	4,091	32,481	69,632
Other steel bars (excluding alloy)	21,606	217,410	372,442
Alloy steel bars	2,672	43,151	150,874
Welding rods, electric	966	10,996	9,159
Boiler plate	2,293	23,794	27,258
Other plates, not fab	23,443	233,862	385,933
Plates, fab., punched or shaped	1,642	17,985	23,811
Iron sheets, black	829	11,745	21,483
Steel sheets, black	27,419	281,171	390,019
Galvanized sheets	4,289	40,464	53,876
Strip steel, cold rolled	4,727	37,952	60,089
Strip steel, hot rolled	4,366	47,714	72,535
Tin plate and tagger's tin	38,468	412.643	371,493
Terne plate (incl. long ternes)	574	6,358	8,187
Structural shapes, plain)			
Structural shapes, fab	29,140	326,492	500,234
Frame and sashes			
Sheet piling	2,050	28,549	24,268
Rails, 60 lb per yard and over	·		
Rails, less than 60 lb per yard	16,129	214,737	313,717
Rails, relaying	10,120	22,101	020,121
Splice bars and tie plates			
Frogs and switches	3,197	54,927	99,877
Railroad spikes	5,151	04,341	22,011
Railroad bolts, nuts, and washers			
	0.450	07 007	63,370
Car wheels, tires and axles	2,158	27,207	
Seamless black pipe	2,044	14,219	11,258
Seamless casing and oil line pipe	40,676	277,884	207,292
Seamless boiler tubes	2,631	27,531	43,833
Welded black pipe	4,512	41,879	68,634
Welded galvanized pipe	2,774	27,594	49,537
Welded casing and oil line pipe	*	*	
Welded boiler tubes Other pipe and fittings	5,946	47,108	64,255
Plain wire	4,937	49,478	52,747
Galvanized wire	3,801	33,477	63,722
Barbed wire	1,698	26,695	49,824
Woven wire fencing	550	7,085	8,537
Woven wire screen cloth	452	3,774	3,907
Wire rope and strand	1,147	8,886	24,824
Wire nails	1,518	13,327	16,399
Other wire and manufactures	3,180	30,654	32,740
	3,130	30,007	52,110
Horseshoe nails	1 001	40.408	0.504
Tacks	1,001	10,182	9,531
Other nails, incl. staples			
Bolts, nuts, rivets and washers, except railroad	4,470	41,207	29,288
Forgings	2,108	18,898	22,338
Horseshoes	88	446	743
TOTAL	308,484	3,086,082	4,376,698
* Included with seamless			

* Included with seamless.
Source: United States Department of Commerce.

Occupational Deferments

World War II pattern to be followed. Local boards allowed wide peacetime discretion

IN EVENT of another war, metalworking companies can expect the same occupational draft deferments for their employees as were granted during World War II.

That's the latest word from National Security & Resources Board and Selective Service officials' who have been mulling over the draft deferment problem for several months.

Occupations deemed essential during World War II included smelting, refining and rolling of metal, scrap salvage, production of metal shapes and forgings, metal mining and finishing of metal products.

Boards Allowed Discretion—Federal policymakers have different plans, however, for the immediate peacetime draft. Initially they say they'll allow local draft boards wide discretion in occupational deferments. The panels would have only broad general instructions and no specific list of essential or critical jobs. Full use would be made of appeals boards to avoid injustices and hardships in individual cases.

Later on, however, NSRB officials explain they hope to have an essential job list at least for the machine tools part of the metalworking industry. It is to be compiled from information the NSRB now is in the process of collecting. As it sends out its phantom orders for machine tools contracts, the board will ask each manufacturer his current manpower needs and how much labor and what kind he would require to fill his phantom contract.

Industry To Be Protected—Then the next task will be to see that the necessary labor isn't taken by the military services. NSRB authorities reason that a machine tools manufacturer never could meet his war contracts if the skilled workers he had counted on having were in the armed forces. Board officials are even talking of sponsoring an apprentice training program for the machine tool industry to provide more skilled workers.

If the manpower answers from the tools manufacturers prove helpful, the NSRB plans to question other manufacturers on labor requirements as it sends out other phantom orders.

Business Stabilizing in Chicago

PRODUCTION gains, declining backlogs, better delivery dates and slightly higher prices show a stabilized business condition, according to the Chicago Purchasing Agents Association's survey for October.

Only 12 per cent of the firms contacted reported lower production, the lowest percentage indicating a decline in the past year. As a result of the better output, deliveries continue to improve and order backlogs continue to decline. Inventories are decreasing slightly.

Although prices show stabilizing tendencies, the trend is on a higher level.

Profit Sharing and Labor Peace

IF PROFIT sharing plans were generally adopted, chances for lasting industrial peace would be almost assured, according to Roy C. McKenna, board chairman of Vanadium-Alloys Steel Co., Latrobe, Pa., who recently spoke before the Council of Profit Sharing Industries in Chicago.

Profit sharing, said Mr. McKenna, is a reward in the form of a fixed percentage of profits to employees for efficiency, loyalty and high craftsmanship. Unlike higher-than-average pay rates which eventually nullify themselves through higher prices for the products made, profit sharing directly increases purchasing power without entering into price.

Mr. McKenna emphasized the fact that a surprisingly large number of firms which have profit sharing plans have been free of strikes since adoption of the program. Other benefits accruing from profit sharing are absence of employee sabotage, better craftsmanship, stabilized labor force and better employee relations.

The Vanadium-Alloys plan was adopted in 1920 and has paid a bonus in every year since adoption except six. The company estimates profits after taxes and after a 5 per cent return on capital and allowance for depreciation and obsolescence. Cash

distribution of profits up to and including June 30, 1946, was either 25 or 27½ per cent. In 1947 and 1948, the amount of distribution was about 40 per cent.

Many Attend Meehanite Meeting

OVER 225 sales, engineering, and operating foundrymen participated in the annual research program of the Meehanite Metal Corp. at the William Penn Hotel, Pittsburgh, Nov. 11-13.

The practical foundry session included papers by A. C. Denison, president, Fulton Foundry & Machine Co., Cleveland, on "Repair of Castings by Burning In"; Dr. C. R. Austin, director of research, Meehanite Metal Corp., New Rochelle, N. Y., on "The Jominy Test and Hardenability of Meehanite Castings"; and A. L. Hartley, chief metallurgist, Cincinnati Milling Machine Co., Cincinnati, on "Heat Treatment of Meehanite Castings."

The engineering and sales session included discussion of the following topics: "Creative Selling," by C. E. Herington, manager, Sales Engineering Department, Meehanite Metal Corp.; "Elements of Design with Meehanite Metal," by E. S. Clark, chief engineer, Meehanite Metal Corp., and H. W. Kelly, manager of foundry operations, U. S. Challenge Co., Centerville, Iowa; and "Weldments and Cast Steel Versus Meehanite Castings," by M. R. Nelson, works manager, Stearns & Roger Mfg. Co., Denver.

Austin-Hastings Machinery Show

AUSTIN-HASTINGS Co. Inc., Cambridge, Mass., distributor of machine tools, and metal working and welding equipment, is sponsoring a machine tool, metal working and welding equipment show Dec. 6-10 in the Hartford Times Radio Center Bldg., Hartford, Conn.

Calendar of Meetings

Nov. 28-Dec. 3, American Society of Mechanical Engineers: 69th annual meeting, Hotel Pennsylvania, New York. Society headquarters are at 29 W. 39th St., New York.

Nov. 29-Dec. 4, 18th National Exposition of Power & Mechanical Engineering: Power Show, Grand Central Palace, New York.

Dec. 1-3, National Association of Manufacturers: Congress of American Industry, Waldorf-Astoria, New York.

Dec. 2-4, Society for Experimental Stress Analysis: Annual meeting, Hotel Commodore, New York. Society address is P.O. Box 168, Cambridge, Mass.

Dec. 2-4, Electric Furnace Steel Committee, Iron & Steel Division, AIME: Sixth annual conference, William Penn Hotel, Pittsburgh.

Dec. 2-4, American Metallizing Contractors Association: Annual meeting, Mayo Hotel, Tulsa, Okla. Association headquarters are at 773 Brownell Ave., St. Louis.

Dec. 3, Magnesium Association and Mellon

Institute: Meeting on magnesium, Mellon Institute Auditorium, Pittsburgh.

Dec. 6-8, American Institute of Electrical Engineers: Conference on electric welding, Rackham Memorial Bldg., Detroit. Institute headquarters are at 33 W. 39th St., New York.

Dec. 7-8, Diesel Engine Manufacturers Association: Meeting at Union League Club, Chicago, Association headquarters are at 1 N. LaSalle St., Chicago.


Dec. 10-11, Machinery & Allied Products Institute: Fourth conference in capital goods economics, at Hotel Mayflower, Washington. Washington office of the institute is at 910 17th St., NW.

Dec. 26-31, American Association for Advancement of Science: Annual meeting.
Stevens and Sherman Hotels, Chicago.

Jan. 10-14, Materials Handling Institute and American Society of Mechanical Engineers: Materials handling show, Philadelphia.



A word for the buyer of Ingot and Charging Cars

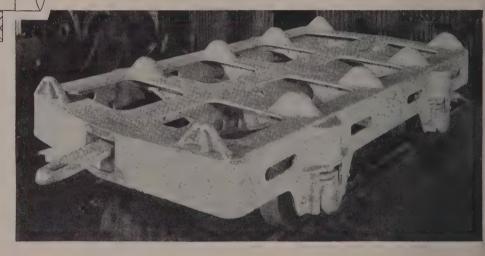

Most leading builders of open hearth cars regularly supply Hyatt equipment. Photos of Ingot and Charging Box Cars shown, courtesy of Pittsburgh Steel Foundry Corporation.

THAT WORD is HYATT because when cars are equipped with Hyatt Roller Bearings maintenance is simplified—wear is reduced—axle breakage virtually eliminated—longer trains handled more rapidly with less draw-bar pull.

All of which accounts for the reason why more than 90% of the ingot mold and charging box cars used in open hearth plants are operating on Hyatts—the preferred steel mill bearing for cranes, motors and other mill equipment, too, for over thirty years. Hyatt Bearings Division, General Motors Corporation, Harrison, N. J., Detroit, Pittsburgh, Chicago and Oakland, Calif.



HYATT ROLLER BEARINGS

Mirrors of Motordom

Chrome "ventiports" in fender sides distinguishing feature of 1949 Buicks. Engine compression stepped up. Dynaflow transmission available on Super series

DETROIT

"ventiports" CHROME-RINGED punched into the sides of front fenders on Buick's 1949 models, announced last week, are the most distinguishing feature of the new jobs and probably will elicit as much discussion pro and con as did Cadillac's fishtail rear fenders. The ports are about 3 inches in diameter and there is a horizontal row of three in each front fender of the super models and four in the roadmaster, Flexible ducts lead from the fender openings to the engine compartment, providing additional cooling much as did hood louvers which were standard in most automobiles before front fenders started swelling up over hood sides. Some manufacturers continued stamping louvers into the inner side of fenders in the effort to provide a little more through-passage for hot engine air.

While Buick engineers do not say so officially, it seems a logical assumption that the use of fender ports will result in cooler air flowing over the dynaflow transmission where dissipation of heat must be taken into consideration. The unit is provided with a positive type of oil cooler through which the 11 quarts of oil in the mechanism are constantly circulated, and the added advantage of a cooler engine compartment should further facilitate the problem of heat removal.

Distinctive in Appearance—Beyond these utilitarian angles, the fender ports certainly are distinctive in appearance, even though they might provide a convenient target for small boys looking for devilish places to lodge sticks, stones, dead birds and whatnot. Screens over the openings could quickly minimize such eventualities.

Three basic body styles are available on the new Buick lines—a two-door sedanet, a four-door sedan and a convertible—all the "C" body series which General Motors first introduced on Cadillac and the Oldsmobile Futuramic. Hood and fender treatment readily differentiates the different makes, even though the bodies come from the same dies. Buick is pioneering an entirely new design, scheduled to be in production by late

spring, using the basic convertible body and attaching a solid steel top with rear window glass which sweeps well around into the sides. The top is fabric-lined on the inside and the entire concept is the answer to buyers who have said they prefer the snap and dash of the convertible

Automobile Production

Passenger Cars and Trucks— U. S. and Canada

	1948	1947
January	422,236	366,205
February	399,471	393,663
March	519,154	443,588
April	462,323	445,137
May	359,996	404,191
June	454,401	421,466
July	489,736	399,456
August	478,146	364,478
September	437,181	444,501
October	506,539*	461,536
10 mos 4	1,525,000*	4,144,221
November		417,493
December		492,109
12 mos		5,055,284
* Preliminary.		

Estimate for week ended:

	1948	1947
Oct. 30	116,968	107,240
Nov. 6	118,229	106,651
Nov. 13	116,468	110,663
Nov. 20	.114,000	115,197

Estimates by Ward's Automotive Reports

lines and at the same time would like to avoid some of the rattles to which convertibles are allergic, while not caring particularly for the advantages of being able to lower the top. Identified as a solid top 6-passenger custom coupe, it will be called the Riviera. Incidentally, Kaiser-Frazer now has a hard-top convertible in the works, one version of which will be known as the Kaiser Virginian.

Engine Compression Raised—Dynaflow transmission now will be standard equipment on Roadmaster models, and a new unit has been tooled and placed in production for the Super series, identical with the larger transmission except for a

slightly smaller "converter" member. Compression ratio of the straighteight valve-in-head engine used in Super models has been stepped up to 6.9 to 1 and horsepower to 120 to accommodate the automatic transmission, and the engine has been fitted with hydraulic valve lifters somewhat different in design than those used by Cadillac and the new Olds V-8. Tappet oil reservoirs are larger and precautions have been taken to feed clean and air-free oil to the system to minimize tappet noise when the engine first is started.

Buick has paired its rear lamps smoothly into the after-edges of rear fenders. Each lamp now combines the functions of stop light, tail light, directional signal and reflector, being positioned high enough so that separate reflector buttons are not necessary to meet regulations of certain states, as was the case in earlier models. Another interesting electrical idea adopted for 1949 is the use of a master fusebox accessible from underneath the instrument panel or from the engine side of the dash, along with wiring lines which have special types of snap-in-connectors, readily attached or disconnected.

New Special Planned-The Buick Special series is being continued unchanged, with either 2-door or 4-door bodies of the General Motors "B" type. It was reported at Flint that an entirely new Special line would be introduced sometime in the late spring and that tooling already has been released. However, around Detroit tool shops the opinion is to the effect this outlook is a trifle premature since tooling is still in the blueprint stage. Just how long Buick will continue the Special probably will be determined by field orders, earlier indications pointed to its discontinuance this year. Another model not mentioned previously, on either the Roadmaster or Super chassis, is the so-called estate wagon, a fourdoor type with steel top, doors and all-steel center pillars, and is being continued in production.

In the General Motors family, only Pontiac and Chevrolet are yet to be heard from on 1949 models, and the reason for their being somewhat behind the rest of the parade probably springs from a combination of circumstances. First, commitments for materials and parts on 1948 models have to be run out and this will require operations until some time next

(Material in this department is protected by copyright and its use in any form without permission is prohibited)



BUICK FOR SPRING: One of the more distinctive 1949 models to be introduced by Buick is the Riviera, a solid-top two-door coupe scheduled for production in late spring. Built on the Roadmaster chassis, the coupe has the appearance of a convertible. All new Buick models will feature the chrome-ringed "ventiports" for identification and cooling purposes

month, and second, both will make use of the completely new "A" body series which involves a considerable amount of retooling and tryout in Fisher Body plants, at least more than what was required to make minor modifications in the "C" body for Cadillac and Olds and to adapt it to Buick.

Oldsmobile has not shown its full line of models for 1949, although it has displayed its headliner, the new V-8 engine, and is now changing over assembly facilities. A press preview of the cars themselves is scheduled for Dec. 2 and is expected to feature two general series—the present Futuramic type with V-8 engine, and the new "A" body with either a 6-cylinder engine having slightly higher compression, or the V-8.

Chrysler Plans Uncertain

CHRYSLER'S new model plans continue cloudy, and recent work stoppages resulting from disputes over production standards resulted in the loss of several thousand units of output by Chrysler and DeSoto which could further delay the transition to 1949 designs. The latter are about ready to go and some plant changes have been initiated leading to the changeover. After the turn of the year it is expected there will be a gradual slowing down in all Chrysler Divisions, as 1948 schedules are run out and as components for new models, requiring the most lead time, are brought into production. It may be well into February before the public has any inkling of what Chrysler, Dodge, DeSoto or Plymouth look like. At the moment around Detroit opinion leans to the belief they will follow current trends to a degree and will lean toward the conservative.

Orders for substantial quantities of ventilating windows for the 1949 Chrysler models have been placed with F. L. Jacobs Co. and they represent a new product in the company's list of automotive parts. Manufacture and assembly will start next month in the Jacobs Parts Manufacturing Division plant at Traverse City, Mich.

Engineering New Model Slow

SKETCHING the slow process of engineering and styling a new passenger car, Harold Youngren, Ford's director of engineering, recently pointed out in an address before the SAE that the first rough sketches for the present Ford were made Aug. 15, 1946, some 20 months before first assemblies were under way. The sketch indicated basic requirements as to seating arrangement, leg and head room and the like, and while it was the roughest sort of freehand scrawling, the actual variation between basic dimensions and the final car was not more than ½-inch.

After the original sketches came 1/10-size drawings, made Sept. 27, and with this drawing were the basic data around which the styling was developed. Next came full-size clay models, two of which were prepared for the Ford project, and even on these some last-minute changes, such as the tail lamp treatment, were introduced. The project then went to the body engineering department for production of templates and drawings. There were 1800 templates and 15,000

drawing releases furnished to manufacturing departments by body engineers.

A chassis design program, started at the same time as the styling work, progressed considerably faster so that completed chassis were ready for tests in March, 1947. They were run under reworked 1947 model bodies until July when the first hand-made bodies were ready. About 1,000,000 miles of testing were put on these cars at the Dearborn test track and in different parts of the United States and Canada. Incidentally, Mr. Youngren calls attention to the fact each experimentally built car costs 25 to 50 times as much as the final production unit.


At the outset it was agreed a reduction in weight was possible by sufficient care and attention to design detail, yet without sacrificing durability or riding comfort. About 120 pounds was knocked out of the body and frame by a more intelligent use of materials and without any reduction in gages of steel used, and with even some strengthening of the body and frame unit. Another 80-odd pounds was eliminated from the remainder of the chassis units.

Ford Adds Two Truck Models

FORD has announced the addition of two new parcel delivery chassis of the forward control type to its truck assortment. The chassis are supplied with grille, windshield, front quarter windows, engine cover and tilting driver's seat. Bodies must be obtained from independent body builders which can tailor them to suit the user's particular requirements. The units are built in either 104 or 122-inch wheelbase, with maximum gross vehicle weight rating of 7800 pounds. Both are powered by the 95-horsepower, 6-cylinder truck engine.

Dodge Rearranges Foundry

GRAY Iron Foundry at the Dodge main plant in Detroit has undergone a complete rearrangement in the core department, involving relocation of baking ovens to the roof of the sixstory structure to get heat and fumes out of the building. The ovens are enclosed by walls and a roof, and coremaking operations have been transferred from the second to the fifth and sixth floors. New sand handling equipment has been installed, as well as cooling tunnels for cores as they emerge from baking ovens, permitting handling into storage at a more comfortable temperature. Changes, costing into the millons of dollars, have lightened manual tasks in the core department and reduced labor needs slightly.

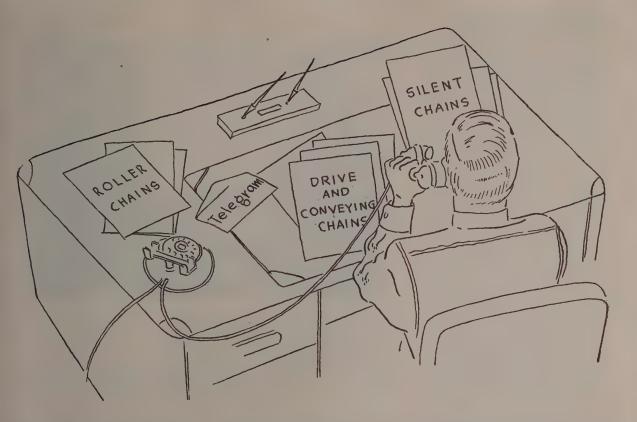

What's Interesting About UNION CHAIN'S Management?

Union Chains for Every Application

Drive and Conveying Chains and Sprockets

Bridge Chain

Combination Malleable Iron and Steel Chain

HB (hardened bearing) type

BP (bar and pin) type chain

Finished Steel Roller Chains and Sprockets

All maufacturer's standard, size % in. to $2\frac{1}{2}$ in. pitch Single and Multiple Strands Extended Pitch Series in sizes $1\frac{1}{4}$ in. to 4 in. pitch

Silent Chain and Sprockets

All sizes $\frac{3}{8}$ in. to $1\frac{1}{2}$ in. pitch

Flexible Couplings

Roller chain type Silent chain type Of greatest interest to you is this: every piece of paper which crosses our desks, whether letter, telegram, engineering drawing or scribbled memo, is concerned with only one subject—Steel Sprocket Chains and Accessory Attachments.

For that is all that Union Chain makes, it being our belief that by specializing, we can build our chains and perform our services in such a way as to make more chain users prefer Union Chains for the transmission of power and the conveying of materials. We frequently find better opportunities to render unusual service when one of the heavier types of Drive and Conveying Chains is required, but are just as happy to tackle problems calling for Machine Finished Roller Chain or Silent Chain applications. A chain problem from you will be in good company on the desks of any in our management group.

The Union Chain and Manufacturing Company



Sandusky, Ohio, U.S.A.

November 22, 1948 55

GE Instrument Exhibit

"Carnival of Measurements" embarks on 14,000-mile tour of 80 U. S. industrial centers

WITH MORE than 9000 miles of cross-country travel already behind it, General Electric Co.'s rolling "Carnival of Measurements" exhibit has embarked on a year-long, 14,000-mile tour of 80 major U.S. industrial centers.

The collection of more than 150 electrical measuring devices manufactured by the GE Meter & Instrument Divisions, West Lynn, Mass., will be displayed some 300 times in the next nine months to groups concerned with the science of measurement. This will include executives and engineers representing utilities, municipalities, industries, research laboratories and government agencies and representatives of schools, colleges and engineering societies.

Exhibit Brought up to Date—Since completion of the first lap of the tour which took it to 21 major cities in the northeastern, mid-Atlantic and midwestern states, the exhibit has been brought up to date. Recent additions to the display include the new I-50 watthour meter; the new automatic interval timer, type T-48; the phase sequence indicator; a new line of small panel instruments; an inkless-type recorder for switchboard mounting; and long-scale switchboard instruments for railroad locomotives

The complete exhibit consists of panels on which are displayed switchboard, panel and aircraft instruments; instrument accessories and components; photometric devices and photovoltaic cells; time switches; portable testing instruments; remote position indicators; recording instruments; instrument transformers; laboratory instruments; watthour meters; and telemeters.

Eaton Buys Saginaw Plant

EATON Mfg. Co., Cleveland, has purchased a plant in Saginaw, Mich., from War Assets Administration for about \$750,000.

The 175,138 sq ft comprising this plant, which was previously leased from the government and operated by Eaton since 1941, doubles the company-owned manufacturing facilities at its Saginaw Division. With the purchase of this plant, the company now owns a total of 2,650,560 sq ft of manufacturing space in Ohio, Michigan and Wisconsin.

Products manufactured at this unit include mechanical valve lifters, hydraulic valve lifters and valve seat in-



50 YEARS WITH COMPANY, NAMED PRESIDENT: E. W. Miller, left, was named president of Fellows Gear Shaper Co., Springfield, Vt., the day after his associates honored him with a dinner in observance of his 50 years of service with the company. Photo shows E. J. Fullam, former president and now chairman, presenting Mr. Miller a commemoratory book. R. M. Fellows has been named first vice president and treasurer; C. M. Peter, vice president and general manager; and H. T. Gates, vice president and factory manager

serts for the automotive and aviation industries, in addition to engine cooling fans for the automotive trade.

Gibson Buys Share In Phoenix

GIBSON Refrigerator Co., Greenville, Mich., has purchased Standard Pressed Steel Co.'s entire interest in Phoenix-Apollo Steel Co., which is owned by a group of several steel consumers.

Frank S. Gibson, jr., secretary-treasurer of Gibson Refrigerator, said the move was taken to insure his company an increased tonnage of sheet steel. He was recently named chairman of the steel company which has plants in Phoenixville and Apollo, Pa.

Donora Furnace Blown Out

NO. 1 blast furnace at the Donora, Pa., steel and wire works of American Steel & Wire Co., U.S. Steel subsidiary, has been blown out for relining after producing 2,003,500 net tons of pig iron. Blown in on Jan. 18, 1941, the furnace has been in continuous operation for seven years and nine months, with an average daily production approximating 700 net tons. The rated capacity is 600 net tons per day.

Estimates range from 60 to 65 days to complete the relining project. A. E. Anderson Construction Co., Buffalo,

has the relining contract, while American Bridge Co. will do the structural work.

Lukens Gives Student Aid

LUKENS Steel Co., Coatesville, Pa., has established a scholarship grant for deserving students of Scott Senior High School in Coatesville who may desire to pursue an engineering career.

The Lukens board of directors has appropriated a \$4000 fund for the purpose. This sum will be payable in four annual installments to a student who is deserving and in need of financial assistance to secure a college education. College engineering courses selected must be one of the following: electrical, mechanical, chemical, metallurgical, oil or civil.

Continental Can Plans New Unit

CONTINENTAL Can Co., New York, has purchased land in Milwaukee and plans to begin construction some time next year on a \$5 million canmaking plant.

Last year the company was unsuccessful in efforts to buy a surplus government plant in the area. Rising freight rates and desire of the brewing industry for more cans are among the factors which influenced Continental to plan a factory for Milwaukee.

Briefs...

Paragraph mentions of developments of interest and significance within the metalworking industry

Bedford Tool & Forge Co., Bedford, O., manufacturer of hand and pneumatic chisels, has appointed Milwaukee Chaplet & Mfg. Co., Milwaukee, as its representative in Wisconsin and western Michigan.

General Electric Co., Schenectady, N. Y., reports it is manufacturing the propulsion equipment for more than one third of the 20 oil tankers now being built or contracted for in American shipyards.

Ampco Metal Inc., Milwaukee, has named the following distributors for its line of welding electrodes: Allied Weld-Craft Inc., Indianapolis; Arizona Welding Equipment Co., Tucson, Ariz.; and Welder Service Co., Toledo, O.

Cutler-Hammer Inc., Milwaukee, manufacturer of motor control and allied electrical apparatus, has opened a branch sales office at 533 Mayo Bldg., Tulsa, Okla. B. R. Stratton is in charge.

---0----

United States Steel Supply Co., Chicago, a U.S. Steel Corp. subsidiary, will soon be able to serve steel users in the Pacific Northwest from warehouses at Portland, Oreg., and Seattle. Columbia Steel Co., another corporation subsidiary, will transfer to the supply company its Portland and Seattle warehouse plants.

Purolater Products Inc., Newark, N. J., manufacturer of filters, will build a \$1 million plant in Union Township, west of Newark, and will consolidate manufacturing now centered in two old locations.

-0-

--0-

Ernest J. Schabelitz, Rincon, Calif., has been granted a patent on a method for removing objectionable substances from coal so that it will be suitable for coking. The process is seen as an aid to western steel industry since the area has an abundance of coal which cannot be converted to coke "as is."

U. S. Government will sell or lease the aluminum reduction plant at Riverbank, Calif., which originally was scheduled to go into the industrial reserve in case of emergency. Plans were changed because of the aluminum shortage.

--0-

—o—
New York State reports nearly 7

million tons of iron ore have been mined in the Adirondack area so far this year. Industry has spent \$40 million since shortly before World War II in developing the mines.

-0-

Rheem Mfg. Co., San Francisco, has been awarded a patent on a phase of its new method in manufacturing galvanized containers. Patent covers the company's method of assembling

50 FOR SKINNER

M. B. SKINNER Co., South Bend, Ind., is observing its fiftieth anniversary as a manufacturer of repair clamps and service fittings for steel and cast iron pipe and drilling equipment for service installations. In the highly specialized manufacture of repair clamps and service fittings, the company has practically no competition. These devices are used to repair breaks in water, gas and oil lines.

The company began a profit sharing plan in 1934 and has never had any labor trouble. Employee turnover is practically nil, the average length of time with the company being 12 years. K. G. Merrill is company president.

zinc coated containers after galvanizing.

United States Air Force is converting 10 of the D-35, "flying wing" type aircraft to turbo-jet engines. This modernization is now in progress at the Northrop Aircraft plant at Hawthorne, Calif.

---0---

Stewart-Warner Corp., Chicago, has acquired Heating Research Corp., Anderson, Ind., maker of a convection type gas heater, and will integrate the business with its South Wind Division at Indianapolis. Allan W. Lundstrum, president, and other key personnel of the company will join the Stewart-Warner organization.

American Standards Association Inc., New York, announces it will conduct a seminar on the organization and technique of standardization work, particularly in individual companies,

--0--

from Jan. 24 through Jan. 28 at the Engineering Societies Bldg., New York.

Binks Mfg. Co., Chicago, manufacturer of spray painting and water cooling equipment, has established a Customer Service Department to centralize all information services formerly scattered among several departments. Unit is under the direction of Joseph Vokoun.

American Washer & Ironer Manufacturers' Association, Chicago, reports that sales of standard-size household washers in September climbed to 433,919, highest in history.

---0---

F. A. Smith Mfg. Co. Inc., Rochester, N. Y., manufacturer of electrical equipment, has changed its name to Fasco Industries Inc. There is no change in management, policy or products.

--0-

War Assets Administration has leased a plant at Johnson City, N. Y., to General Electric Co. and a unit in Milwaukee to A. C. Spark Plug Co. for production of military equipment for the Air Force.

-0-

Titeflex Inc., Newark, N. J., manufacturer of flexible metal hose and tubing, filters, lubricator valves and other products, has named Manufacturers Sales Agency. Pittsburgh, as an agent in western Pennsylvania and West Virginia.

Marcus Transformer Co. Inc., Hillside, N. J.; has appointed W. E. Holiman Co., Houston, Tex., as its sales representative in Texas, Louisiana and Oklahoma.

Pittsburgh Plate Glass Co., Pittsburgh, has acquired controlling stock interest in Midvale Coal Co. The firm is being liquidated and its mine near New Philadelphia, O., will be operated as the Columbia Coal Division of Pittsburgh Plate Glass Co.

Straub Mfg. Co. Inc., Oakland, Calif., announces that Pennsylvania Crusher Co., Philadelphia, has acquired exclusive manufacturing and sales rights in eastern United States and Canada covering the Kue-Ken line of jaw crushers and gyratory crushers. Pennsylvania is a subsidiary of Bath Iron Works Corp., Bath, Me.

Montreal Locomotive Works Ltd., Montreal, Que., and Canadian Locomotive Co. Ltd., Kingston, Ont., have received a \$14 million order for the production of 100 steam locomotives for the Indian Government Railways.

--0--

The Business Trend

LEVELING off slightly below the postwar record peaks, industrial production as reflected by STEEL's index was at 175 per cent (preliminary) of the 1936-1939 average for the week ended Nov. 13. However, new records are being set almost weekly by the petroleum and electric power industries to give material assistance in maintaining industrial production at the current high levels.

STEEL—In the forefront of industrial activity for the last few months, the steel industry has added a number of production records to the growing list of postwar and all-time highs that have been set this year. October's output of steel for ingots and castings was the highest month's total in war or peace, and production for the week ended Nov. 13 resulted in an all-time weekly high, topping the former record set in the wartime week ended Apr. 24, 1944.

AUTOMOBILES—Outturn of passenger cars and trucks, on the other hand, trails the figures of a few weeks ago because of decreased assemblies resulting from model changeovers and scattered strikes. Loss of an estimated 3400 units in the week ended Nov. 13 was caused by the idling of 15,000 workers at four Detroit area plants. Total industry production at 116,468 units was 1761 below preceding week.

POWER—Major electric utility system peak loads for September reached an all-time high of 47,960,000 kilowatts, higher by 0.9 per cent than the previous record reached in December, 1947, according to the Federal Power Commission. Energy requirements for September at 23.2 billion kilowatt-hours were 2.7 per cent below August but 10.0 per cent higher than in September, 1947.

INCOME—Commerce Department figures point to a record national income of more than \$220 billion with wage and salary earners receiving about \$120 billion after taxes. Profits of the nation's corporations are estimated at about \$20.4 billion after taxes, or 9.2 per cent. Although this is a new high in dollars, corporations netted \$8.4 billion after taxes in 1929 which was 9.6 per cent of the total national income of \$87.4 billion.

TRUCKLOADINGS—Volume of freight transported by motor carriers in September reached an all-time high of 2.8 million tons, according to American Trucking Associations Inc. September's total topped figures of the preceding month and September, 1947, by 2 per cent and 12.8 per cent, respectively. Carriers of iron and steel hauled about 4 per cent of the total tonnage and reported increases of 0.6 per cent over August and 22.9 per cent over September, 1947.

RAILROADS—Estimated net income of the class 1 railroads in September was four times that for the same month in 1947, according to the Association of American Railroads. After interest and rental, the net income was reported at \$82 million as compared with \$20.7 million for September, 1947. For the first nine months of this year, net income is estimated at \$502 million, well above the \$317 million in the corresponding period last year.



Index (chart above): Week ended Nov. 13 (preliminary) 175 Previous Week 175 Month Ago 177 Year Ago 168

BAROMETERS of BUSINESS-

INDUSTRY	Latest Period*	Prior Week	Month Ago	Year Ago
Steel Ingot Output (per cent of capacity)†	99.0	99.0	98.0	97.0
Electric Power Distributed (million kilowatt hours)	5,571	5,564	5,482	5.084
Bituminous Coal Production (daily av.—1000 tons)	1,706	2,042	1,980	2,139
Petroleum Production (daily av.—1000 bbl.)	5,626	5,627	5,586	5,257
Construction Volume (ENR—Unit \$1,000,000)	\$137.8	\$109.3	\$170.2	\$159.3
Automobile and Truck Output (Ward's—number units)	116,468	118,229	123,185	110,663
* Dates on request. † 1948 weekly capacity is 1,802,476 net tons. 1947	weekly capacit	y was 1,749,928	net tons.	


TRADE


KADL				
Freight Carloadings (unit—1000 cars)	860†	843	914	878
Business Failures (Dun & Bradstreet, number)	96	104	94	84
Money in Circulation (in millions of dollars):	\$28,337	\$28,254	\$28,284	\$28,709
Department Store Sales (changes from like wk. a yr. ago) ‡	-8%	+2%	+10%	+10%
† Preliminary. ‡ Federal Reserve Board.	- 70	1 70	1 -0 /0	+10/0

Steel Employment

	Empl	oyees	† Pa	otal yrolls llions)	Wa	urly ges† nts)
	1948	1947	1948	1947	1948	1947
an.	 622	601	\$180.2	\$155.8	157.3	138.1
Peb.	 626	607	167.6	139.5	155.1	137.0
Mar.	 629	609	183.0	150.6	154.8	137.9
April	 626	611	168.5	168.3	155.1	153.3
May	 628	615	175.3	175.8	157.7	155.6
Tune	 634	623	179.5	167.6	156.9	154.7
Tuly	 641	623	179.8	163.2	164.5	153.9
lug.	 645	625	193.8	169.1	168.9	155.6
Sept.	 641	618	199.4	168.9	171.8	157.1
oct.	 	620		180.1		154.6
Nov.	 	624		171.0		158.7
Dec.	 	621		175.3		156.5

† Monthly average.

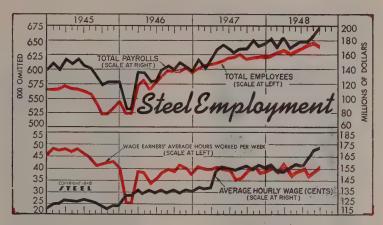

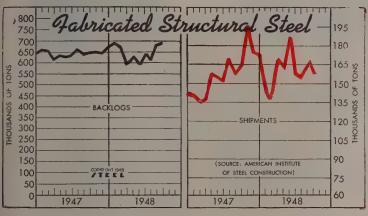


Fabricated Structural Steel

		(00	0 Tons)			
		Shipme	nts	—В	acklog	s
	1948	1947	1946	1948	1947	1946
Jan.	146.4	140.6	107.5	692	661	552
Feb.	141.6	136.1	63.8	673	656	551
Mar.	167.0	137.8	102.8	597	614	605
Apr.	166.7	157.4	122.5	630	632	674
May	186.9	155.0	124.4	593	628	615
June	157.1	151.9	126.8	647	634	642
July	156.1	169.9	140.2	613	661	674
Aug.	167.2*	158.0	157.5	691	639	651
Sept.	158.8	164.3	141.9	698	648	682
Oct.		196.1	164.7		649	660
Nov.		175.0	157.3		645	665
Dec.		173.0	142.1		671	. 646
Total		1,915.1	1,551.6			
* R	evised.					

Malleable Iron Castings

		Shipr	nents	Unfilled for ea for	
		(000 or	nitted)	(000 on	aitted)
		1948	1947	1948	1947
fan.		77.7	75.9	206	260
Peb.		75.2	74.7	209	274
Mar.		86.8	76.6	203	281
Apr.		80.6	81.9	200	275
May		76.1	75.5	~ 192 -	202
Tune		81.7	78.5	179	249
July		64.9	64.2	180	235
Aug.		73.3	62.4	177	230
Sept.		77.8	71.6	164	218
Oct.			84.0		211
Nov.			72.1		206
Dec.			77.8		202
Tot	al		895.1		

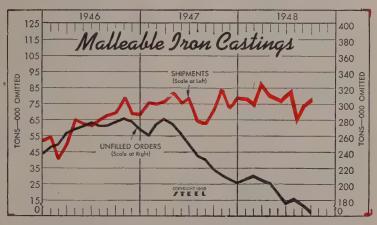

Bank Clearings (Dun & Bradstreet—millions) Federal Gross Debt (billions) Bond Volume, NYSE (millions) Stocks Sales, NYSE (thousands) Loans and Investments (billions)† United States Gov't. Obligations Held (millions)† † Member banks, Federal Reserve System.	\$252.4 \$17.8 6,972 \$62.2	Prior Week \$13,076 \$252.5 \$21.3 9,392 \$62.4 \$33,526	Month Ago \$10,842 \$252.4 \$11.9 3,625 \$62.2 \$33,235	Year Ago \$11,529 \$258.6 \$20.7 3,486 \$64.9 \$37,982
STEEL's composite finished steel price average All Commodities† Industrial Raw Materials† Manufactured Products† † Bureau of Labor Statistics Index, 1926=100.	\$95.05	\$95.05	\$95.05	\$76.09
	162.7	163.8	164.6	157.9
	175.1	176.2	176.7	175.2
	158.1	159.4	160.5	151.0

Men of Industry



J. E. NIEDERHAUSER

J. E. Niederhauser, formerly manager of industrial relations, Continental Can Co., New York, has been promoted to the newly created post of vice president in charge of industrial relations. Prior to his present responsibilities, which for several years have encompassed industrial relations matters for the entire company, Mr. Niederhauser was in charge of industrial relations for the company's Paper & Plastics Divisions.

-0--R. C. Brown has been appointed director of sales, Foote Bros. Gear & Machine Corp., Chicago. He was associated for 21 years with Link-Belt Co., and while with that company was Southwest Division manager. More recently, and until joining Foote Bros., he was president of Brown-Steele Co., Dallas, Tex. During the war Mr. Brown was deputy director of the General Industrial Equipment Division, War Production Board. Mr. Brown's appointment with Foote Bros. is part of a program which has resulted in the addition of modern production facilities and the introduction of newly engineered, enclosed worm and helical gear drives.

A. T. Blakemore, for the past four years connected with the Conlon Division, Conlon-Moore Corp., Chicago, has been made its sales promotion manager. Earl Stiefel, formerly purchasing agent, Moore Division, Joliet, Ill., previously in the same post for Round Oak Stove Co., has been made general director of purchases for both divisions and transferred to Chicago.

Bonney Forge & Tool Works, Allentown, Pa., announces appointment of E. S. Sensenderfer to the position of



R. J. LECKRONE

advertising manager. He returns to the automotive and industrial advertising fields after service in World War II, and a period as account executive with an advertising agency. Prior to his army service Mr. Sensenderfer was with United States Asbestos Division, Raybestos-Manhattan Inc., and the American Trucking Associations Inc.

R. J. Leckrone has been named vice president in charge of engineering and sales of the recently organized Pittsburgh Engineering & Machine Co., 1004 Plaza Bldg., Pittsburgh. This organization was the former Machinery Division of Pittsburgh, Steel Foundry Corp., Glassport, Pa.

Lewis W. Rose has been appointed assistant comptroller in charge of cost and statistics for Columbia Steel Co., subsidiary, U. S. Steel Corp.

B. R. Stratton has been placed in charge of a new branch office recently established at Tulsa, Okla., by Cutler-Hammer Inc. Mr. Stratton will manage the new office as a branch of the Dallas district office.

G. O. Britton has been appointed domestic sales manager, and E. B. Schlenk, district representative of Athey Products Corp., maker of heavy road building equipment, Chicago. Mr. Britton became associated with the company last May as assistant domestic sales manager. Mr. Schlenk will take over the central territory.

Howard M. Dawson has been elected president, Jessop Steel International Corp., New York. He formerly was vice president and managing director



JOHN A. PROVEN


of the corporation, a subsidiary of Jessop Steel Co., Washington, Pa.

Porter-Cable Machine Co., Syracuse, N. Y., announces appointment of John A. Proven as general sales manager. He previously held the position of vice president and sales manager of the Sterling Tool Products Co., Chicago. Mr. Proven will have charge of sales policies governing the national distribution of Porter-Cable's products which include portable electric tools, floor sanding machines, and abrasive belt grinders. He will also direct the sales efforts of the Unit Electric Tool Co., Syracuse, a division of Porter-Cable.

Dr. William W. Eaton has been appointed to the Central Research Organization of Olin Industries Inc., East Alton, Ill., parent company of Western Cartridge Co. Division and Winchester Repeating Arms Division. Dr. Eaton will have headquarters at New Haven, Conn. Besides the principal function of exploring new fields for possible future products, the Central Research Organization is devoted to making basic research and studies in the field of scientific development.

A. L. Berlin has been elected vice president in charge of sales, Pyle-National Co., Chicago. W. A. Wulle has been named advertising and sales promotion manager, and F. M. Currie, manager of industrial sales for this railroad equipment firm.

John T. Anderson, manager, commercial research department, Market Development Division, Armoo Steel

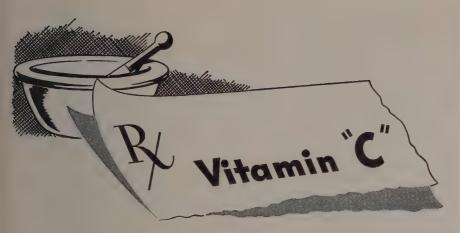

This prescription raised production 5



Vitamin "C"?—Carboloy Cemented Carbide, of course.

It was a Carboloy engineer who turned the trick. Here's the story:

On installing a new boring machine recently, a small plant in Pennsylvania was sadly disappointed to get no better production from it than they had from the old one. So they called in a Carboloy engineer.

Now? Thanks to his suggestions, the new machine is turning out half again as many pieces—twelve cast-iron wheels an hour instead of the previous eight.

Why was he able to help them? Here's the reason: Carboloy engineers spend most of their time working with Carboloy Cemented Carbides. They've come up against almost every type of carbide problem you can imagine, in their time. They're experts—specialists in carbides.

Try this prescription yourself!

You, too, can back up the intimate knowledge of your own production

men with this specialized "knowhow" of Carboloy engineers. They can bring to your plant a broad experience in obtaining maximum results with carbides.

Slight changes in tool design, speeds or feeds, grinding, or tool handling often effect far reaching economies and increases in out-put.

Together, your engineers and our Carboloy specialists can form a team nothing can stop. Together they can use carbides to cure many of your production ills.

Ask for your Carboloy engineer

Your Carboloy engineer will be glad to help you with your carbide problems; or in the selection of the most economical tooling from any of Carboloy's 600 standard tools and blanks, or special Carboloy-tipped tools made by more than 150 tool manufacturers.

Why not call your Carboloy engineer? Or write us direct: Carboloy Company, Inc., 11141 E. 8 Mile Road., Detroit 32, Michigan.





Corp., Middletown, O., has been appointed chairman of a project committee by the Census Advisory Board, U. S. Department of Commerce.

Hyman Iserson and Maurice E. Miville have been appointed research chemists at the Whitemarsh Research Laboratories, Pennsylvania Salt Mfg. Co., Philadelphia.

--0--Representatives appointed by Allis-Chalmers Mfg. Co., Milwaukee, to district offices are: J. I. Onarheim and R. T. Ward, assigned to the Milwaukee district office. Mr. Onarheim, who has had more than 20 years of design and sales engineering experience in the company's electrical department, has been a member of the central station and marine sales department for the last 18 months. Mr. Ward, for the last four years in the administrative office of W. C. Johnson, executive vice president, General Machinery Division, was previously connected with the company's Washington office. Jay Seefeld has been named to the San Antonio, Tex., office. He had been with Tennessee Eastman Corp., Oak Ridge. W. H. Sanford has been assigned to the Houston, Tex., office. He previously was associated with Fort Worth Steel & Machinery Co. A. Joseph Mestier Jr. has been assigned to the New York district office as petroleum sales representative. He joined Allis-Chalmers in 1946 following discharge from the U.S. Army. Robert E. Bender has been assigned

Orville F. Figley has been appointed Chicago district manager of United States Steel Supply Co., warehouse subsidiary of United States Steel Corp. Associated with the company for over 30 years, Mr. Figley has served exclusively as sales manager for the Chicago district for the past two years. Named as assistant dis-

to the Grand Rapids office.

trict managers are Frederick L. Bruckner and Arthur W. Johnson. Howard Heiser has been appointed office manager. The appointments are concurrent with the recent move of the company's national headquarters to 208 S. LaSalle St. The warehouse and plant at 1319 Wabansia is now a separate district operation.

---0---

General Electric Co., Schenectady, N. Y., announces appointment of Dr. James R. Donnalley as manager of its silicone manufacturing plant at Waterford, N. Y., which is connected with its Chemicals Division. Herbert M. Brusman has been appointed manager of the Employee Relations Division -of the chemical department, Pittsfield, Mass.

E. C. Schmidt will retire Dec. 1 as executive assistant to the president of Union Pacific Railroad.

Carl Eversole has joined the agency staff of Charles F. Dowd Inc., Toledo, O. He has been in charge of Industrial Division, advertising and publicity, at Surface Combustion Corp. for the past seven years. He will continue to handle the heat treat, steel mill, glass and Kathabar Air Conditioning Divisions of this account, now with Charles F. Dowd.

---0---

G. E. Seavoy, now vice president in charge of the Process Sales Division, will direct all field sales operations, including advertising, field erection and service for Whiting Corp., Harvey, Ill. M. J. Rice, now vice president in charge of the Industrial Sales Division, will direct all of the company's Product Sales Divisions. These promotions are the first step in a program to streamline and strengthen the company's sales organization.

Russell D. Ryker has been promoted

to assistant manager, quality control, and Louis J. Burkhart, chief inspector, for Bendix Home Appliances Inc., South Bend, Ind. Mr. Ryker has been in the Quality Control Division since 1943. Mr. Burkhart formerly was with the Ingersoll Steel Division, Borg-Warner Corp.

Joseph W. Chanda has joined the International Division, A. O. Smith Corp., Milwaukee, and will specialize in the sale of electric motors.

--0---

Fred S. Ehrman, general sales manager of Bowser Inc., Ft. Wayne, Ind., since 1944, has been elected to the newly created post of vice president and director of sales. He has been associated with the company since 1925, and has served successively in experimental engineering, sales engineering and divisional sales work.

James C. Plunkett has been appointed assistant advertising manager for the Columbia Chemical Division of Pittsburgh Plate Glass Co., Pittsburgh. Prior to his appointment with Columbia Chemical Division, Mr. Plunkett edited Electrical Merchandising News, dealer publication of the residential sales department, Duquesne Light Co., Pittsburgh.

Joseph P. McManus, for 23 years associated with the Truck & Coach Division, Pontiac, Mich., General Motors Corp., and lately as assistant director of purchasing, has been named director of purchasing, succeeding the late R. E. Hoppes.

Thomas B. Moule, formerly assistant director of sales, has been appointed sales manager of Plomb Tool Co., Los Angeles. He has supervised many sales and merchandising activities since joining the company in 1944. For five years following graduation



ORVILLE F. FIGLEY



G. E. SEAVOY



THOMAS B. MOULE



but what about production?

Planning for planes? Or for any giant production job? Then Bliss engineers can help. They'll dare to pioneer with you in designing power press equipment specially suited for the job at hand. They bring to every conference table a fund of production engineering knowledge that goes back over 90 years. They've designed and built more types and sizes of presses than any other company in the world.

Yes, if it's airplane wings or jet tail cones, gage parts or landing gear, Bliss is particularly qualified to bring to your pressed metal problem the development engineering experience that's needed to get the most out of production. That's why Bliss presses predominate throughout the pressed metal field, the aircraft, automotive, railroad, electrical, and many other industries... If that's why the biggest presses for the toughest pobs have always been Bliss-built...that's why if yours is a tough one, you'll be on your way to-prowards atts.

E. W. BLISS COMPANY, DETROIT 2, MICHIGAN
WORKS AT: Toledo, Cleveland, Salem, Ohio; Hastings, Mich.;
Englewood, N. J.; Derby, England; St. Ouen sur Seine, France.

An outstanding example of Bliss' pioneering in equipment for the aircraft industry is the patented 2500-ton Six Die Slide Pressused by many aircraft builders to produce a variety of sheet metal parts. Dozens of dies are kept in constant operation, as 24 operators simply load and unload. Interlocked control of any slide sequence is provided. No master operator needed.

See our Catalog

CORC THAN ANY OTHER COMPANY IN THE WORLD

from the University of Michigan, he was advertising and sales promotion manager for Ex-Cell-O Corp., Detroit, and for three years he was sales manager of the Republic and the Northern Aircraft Products Divisions of Avco Mfg. Corp.

Harry T. Worthington, vice president, Moore Division, Joliet, Ill., of Conlon-Moore Corp., Chicago, is chairman of the sponsors' committee and a member of the executive committee of the Gas Space Heater Division, Institute of Cooking & Heating Appliance Manufacturers, which will hold its 16th annual convention in Cincinnati, Dec. 6-8. The sponsors' committee represents manufacturers cooperating with the Battelle Memorial Institute and Bituminous Coal Research Inc., in a long-term study of coal heating appliances.

Norman J. Kilmer has been appointed sales representative for Ohio Electric lifting magnets in the Pittsburgh and Wheeling, W. Va., area. His offices are located in the Frick Bldg., Pittsburgh. He represents Ohio Electric Mfg. Co., Cleveland.

Dr. Marcus Thau has been appointed director of research, development and production, Metric Lacquer Mfg. Co. Inc., Irvington, N. J. He held a similar position with Lacquer & Chemical Corp., Brooklyn, N. Y.

--0---

--0-

Dr. Kenneth C. D. Hickman, inventor of the modern molecular still used for refining heat-sensitive oils, such as those containing vitamins, has announced that he will serve both Eastman Kodak Co., Rochester, N. Y., and Arthur D. Little Inc., Cambridge, Mass., as a consultant.

Walter H. Lessmann and Roy R. Stamm have been appointed assistant managers of the St. Louis branch, National Lead Co. Mr. Lessmann served the company in St. Louis for many years, and became assistant manager of the Cincinnati branch in 1940. Mr. Stamm began his association with the company in 1913. He served in the St. Louis metal department since 1924, where he has been manager since 1943.

William A. Finkl, president, A. Finkl & Sons, manufacturer of forgings, Chicago, has been named to the Illinois Institute of Technology board of trustees.

Frank C. Gerhart has been appointed advertising manager of American Type Founders Sales Corp., Eliza-



GORDON P. LOVELL

beth, N. J., effective Dec. 1. He will fill the vacancy left by the recent death of Robert B. Huddleston. For the past 12 years Mr. Gerhart has been with the Champion Paper & Fibre Co., Hamilton, O.

International Business Machines Corp., New York, announces appointment of Gordon P. Lovell as sales manager of its Electric Accounting Machine Division. He previously was assistant to the IBM general sales manager. Mr. Lovell joined the corporation in 1932, and has since served in various sales and executive capacities.

Louis L. Brott has been appointed public relations director for Institute of Scrap Iron & Steel Inc., Washington.

--0--

Louis Goldman, J. S. Goldman Iron & Metal Co., Port Huron, Mich., has been elected honorary vice president, a new office, of Michigan Chapter, Institute of Scrap Iron & Steel Inc. Hyman R. Nathan, Gendelman & Nathan Iron & Metal Co., Detroit, was re-elected president; Edward Elk, Kasle Bros. Inc., Flint, Mich., first vice president; Joseph Newman, Warren Iron & Metal Co., Detroit, second vice president; Robert Glick, Glick Iron & Metal Co., Jackson, Mich., secretary; and Kenneth Mc-Clellan, Luria Steel & Trading Corp., treasurer.

Northern Ohio Chapter, Institute of Scrap Iron & Steel Inc., has re-elected all officers with the exception of Monroe Zipp, who has been replaced by Myron J. Urdang, A. Shaw Co., Cleveland, as secretary.

Bruce H. Wallace, a vice president, Otis Elevator Co., New York, has been elected to the additional posts of treasurer and director. Percy L. Douglas, also a vice president, has been elected a director of the company. Mr. Wallace has been in charge of accounts and budgets, and chairman of the engineering development committee, while Mr. Douglas has been in charge of international operations.

T. J. Morton Jr., president, Hoosier Cardinal Corp., was elected president of the National Metal Trades Association. Other officers included J. L. Kopf, president, Jabez Burns & Sons Inc., who is the new first vice president; and Philip M. Morgan, president, Morgan Construction Co., the second vice president and treasurer.

Philadelphia Chapter, Institute of Scrap Iron & Steel Inc., announces the election of the following officers: President, Harry Stave, Stave Bros., Philadelphia; vice president, J. F. Malloy, Malloy & Schreiner, Philadelphia; treasurer, D. J. Giordana, Giordano Waste Material Co., Camden, N. J., and secretary, Marcus J. Margulies, Luria Steel & Trading Corp., Philadelphia.

Thomas C. Yarnell has been named manager of the Detroit district of Replacement Tire Sales Division, B. F. Goodrich Co., Akron. He succeeds E. A. Holsten, resigned.

John S. Cort Jr. has been appointed assistant to the president of Martin Dennis Co. of Newark and Kearny, N. J., a subsidiary of Diamond Alkali Co., Cleveland. Associated since early 1947 with the Cincinnati plant operated by Diamond's Standard Silicate Division, Mr. Cort succeeds Charles E. Grant, who was promoted recently to manager of chromium chemical sales for Diamond Alkali at Cleveland.

Morris Rhine has been appointed assistant to the Pacific district manager, apparatus department, General Electric Co.

Delmont Iron Works, Philadelphia, announces the following appointments, to be effective Dec. 1. To serve until the next annual meeting of the shareholders of the company, Robert E. Seiffert succeeds the late William C. Smith, and William E. Hendricks succeeds John S. Adelhelm, resigned, on the board of directors. On the executive committee, Harry A. Rowbotham succeeds Mr. Smith and Harold Leonberger succeeds Mr. Adelhelm. In the finance committee Bennett T. Mial succeeds Mr. Smith and Albert W. Schede succeeds Mr. Adelhelm. Sigmund S. Albert succeeds Mr. Adelhelm as chairman of



WILLIAM L. DEAN

President and general manager, Mathews Conveyer Co., has been elected president, Foundry Equipment Manufacturers Assn. Noted in STEEL, Nov. 15 issue, p. 88

the executive committee. Vacancies filled in corporate offices are: Albert W. Schede, secretary, becomes treasurer, succeeding Mr. Adelhelm in that position. Bennett T. Mial succeeds Mr. Smith as vice president, and Harry A. Rowbotham succeeds Mr. Adelhelm. Harold Leonberger has been elected a new vice president. Administrative vacancies filled are: Harry H. Stahl, formerly assistant



R. R. GRINER

Who has been appointed western sales agent at Konsas City, Mo., for Electric Furnace Co., Salem, O. Noted in STEEL, Nov. 15 issue, p. 88

chief engineer, becomes chief engineer, succeeding Joseph G. Shryock; Robert K. Seiffert becomes assistant chief engineer; and William Hendricks will be production manager of the company.

Melvin W. Cole, who has served as director of the Iron & Steel Division, Office of Industry Co-operation, since that unit was set up under Public



E. E. BRADBERRY

Who has been appointed assistant manager of sales at Chicago, Jessop Steel Co., Washington, Pa. Noted in STEEL, Nov. 15 issue, p. 84

Law 395, terminated this connection as of Nov. 12. He is succeeded in this capacity by A. A. Wagner, on loan from Jones & Laughlin Steel Corp. Mr. Cole has resumed on a full-time basis his connection as assistant general manager, western sales, Bethlehem Steel Co., with head-quarters in Detroit. Mr. Wagner had served as assistant to Mr. Cole in the OIC.

OBITUARIES . . .

Myrl L. Jacobs, 63, vice president in charge of raw material properties, Bethlehem Steel Co., Bethlehem, Pa., died Nov. 13 in Trinidad, B. W. I., where he was on a tour of company properties. He joined Bethlehem Steel in 1920 as general manager of quarries and 14 years later was appointed general manager of the Stone & Slag Division. In 1939 he was named assistant to the vice president and in the following year was appointed vice president, in charge of all Bethlehem subsidiary companies engaged in mining. He was also elected a director of Bethlehem Steel Corp. that year.

George G. Small, 84, long associated with the United Engineering & Foundry Co., Pittsburgh, died Nov. 15 at his home in Beaver, Pa. He was made second vice president of the company in 1905, and 10 years later, first vice president. He retired in 1930 after 36 years with the company and its predecessor.

Heyliger Church, 55, vice president in charge of export sales, Weatherhead Co., Cleveland, died of a heart attack Nov. 13, while on a business trip in Buenos Aires. He joined the Weatherhead Co. in 1936 as sales manager, Aviation Division.

Thomas R. Mullen Jr., vice president, Lehigh Structural Steel Co., Allentown, Pa., died in Salem, Mass., Nov. 16, as a result of injuries received in an automobile accident a few days before. He was affiliated with the New York office of the company and was a son of the president of the company.

--0--

James D. Jones, 67, vice president in charge of engineering, H. A. Brassert & Co., New York, consultant engincer to the iron and steel industry, died recently. In 1905 he was appointed chief engineer for Algoma Steel Corp., which he left in 1911 to become chief engineer of Gary Works, Carnegie-Illinois Steel Corp. He returned to Algoma Steel to become vice president in charge of engineering from 1918 to 1935. He joined Youngstown Sheet & Tube Co. in 1935 as chief engineer for all of its plants, and in 1945 joined H. A. Brassert & Co.

Joseph A. Kilpatrick, 80, chairman of the board of Dominion Wheel & Foundries Ltd., Toronto, died recent-

ly. He was connected with Griffin Car Wheel Works, which later became Canada Iron Foundries, Mr. Kilpatrick also served as director of Canada Iron Foundries Ltd., Reading Car Wheel Co. Inc., National Iron Corp. Ltd., and Anglo-Canadian Wire Rope Co. Ltd.

Robert M. Akin, 71, chairman, Hudson Wire Co., Ossining, N. Y., died recently. From 1908 until a month prior to his death he had been president of the company.

Nelson E. Woolman, 63, mechanical engineer, Cherry Rivet Co., Los Angeles, and former owner of Power Scal Co., died recently.

Frederick K. Weider, president, Medina Iron & Brass Co., Medina, N. Y., and president of Barr & Creelman Plumbing Supply Co., Rochester, N. Y., died Nov. 13.

Charles E. Wicke, 58, president, A. C. Wicke Mfg. Co., New York, maker of industrial refrigeration equipment, died Nov. 10 at his home in Yonkers.

Andrew J. Ronan, 71, proprietor of A. J. Ronan Co., maker of truck bodies, Albany, N. Y., died recently.

FLASH BUTT-WELDED STAINLESS STEEL RINGS

by AMERICAN WELDING

Compared with any other manufacturing method, flash butt-welded alloy rings prove to be equally efficient and much less expensive. Records show that there is a substantial

SAVING IN THE PRICE OF RINGS

when alloy rings are produced by the flash-butt welding process.

If you use stainless rings, or any other welded product, a few moments spent with our representative may prove to be very advantageous. May we hear from you?

Illustrated Booklet

REPRESENTATIVE FLASH BUTT-WELLT TEST RESULTS (as welded) FROM AMERICAN WELDING AND MANUFACTURING COMPANY'S RESEARCH FILES.

ALLOY

TENSILE STRENGTH

Stainless, Type No. 347 Stainles Type No. 410 Incan

91,000 psi. 76,000 psi. 124,000 psi.

N-155

135,000 psi.

AMERICAN WELDING

AND MANUFACTURING COMPANY

110 DIETZ ROAD . WARREN, OHIO

Engineering News

CHIP DUMPING FIXTURE— In processing large V-8 cylinder blocks in Ford's Lincoln plant, an unusual setup is employed to free them of loose chips. The company uses an automatic roll-over fixture immediately following the rough boring station. Each block is pushed into the fixture, automatically rotated to dump out the loose chips, then automatically moved to the next operation.

BEARING PROTECTOR—Dirt and moisture are excluded from the precision ball bearings shipped by Barden Corp., Danbury, Conn., by means of a polyethylene film supplied by Plax Corp. of Hartford, Conn. The plastic covering is reported to afford both a physically and chemically tough protective wrap. It does not become brittle even at temperatures as low as 60° below zero, nor does it lose stability when subjected to high humidity or temperatures found in the tropics. Further advantage is its resistance to the oil used to keep the bearings lubricated.

CUSTOM-BUILT FITTINGS— Flat steel plate was used by Akweld Construction Co., Brooklyn, N. Y., in making up some fittings required by Kings County Lighting Co., for a natural gas line running into its new compressor plant. Sections of the plate first were cut from 4-inch and 5/16-inch thick stock with an Air Reduction No. 10 radiagraph oxyace-tylene machine, then rolled into shape. Butt joints were welded from both sides and flanges were welded both inside and outside. The fittings ranged in diameter from 8 to 50 inches.

SPEEDS UP FORGING—Use of a mechanical positioner or manipulator in the forge shop of Marion Power Shovel Co., Marion, O., now enables a 3-man crew to hammer out large shafts in a matter of 15 minutes—one-fourth the time required formerly by the old method which occupied a 6-man crew. The unit takes the square billets from the ovens and positions them in preparation for a series of blows by the steam hammer—an operation that transforms the billets into round shafts. During the time necessary for hammering, the heated shafting does not drop below 1800° F.

ROCKS ON ROLLERS— Some 13,888 rollers, each made up of three tube-shaped steel pulleys are included in the 7-mile conveyor which recently began the job of transporting 4 million tons of crushed rock for the construction of the giant Bull Shoals dam on White river. According to Hewitt-Robins Inc., Passaic, N. J., the machinery it supplied for the project supports 21 separate belts for handling materials at the rate of 525 feet per minute.

DELICATE POSITIONING— In handling delicate parts of x-ray tubes in the plant of General Electric X-Ray Corp., Milwaukee, gloves are worn by operators at all times in one operation—that of setting coiled filaments into cathode cups to a prescribed depth below the surface of the cups. Positioning must be accurate to within plus or minus one-thousandth of an inch. The cathode may be compared in importance with the lens of a camera. Its accuracy must be microscopic, since output of the tube is dependent on the size and shape of the focal spot from which the electrons emanate before bombarding the target or anode to produce x-ray.

DESIGNER'S HEADACHE-Whenever a surface on a forging must be machined, it is highly important to increase dimensions of the part to allow enough metal for an effective job of machining. Amount of metal to be allowed on such parts is a question for the designer to answer. From the machining viewpoint, allowance should be as little as possible to cut down machining time. Yet if amount of metal allowed on the part is too small, too much time may be used in positioning the forging in the machine, inasmuch as it is important to center the forging exactly. (p. 68)

"SINTER-WELDING" PROCESS -In producing parts of metal powders by compression, each part is transformed into a strong piece by subjecting it to a heat treating or sintering process that welds the individual powder particles together. Often, it is pointed out, a metal-tometal contact does not exist in the unsintered compacts, since the particles may be separated by thin oxide films. This structure is fundamentally changed by sintering in a controlled reducing atmosphere. Metallic bonds are produced in a short time, at temperatures usually below melting point of the metals. (p. 73)

UNEXPECTED ELIMINATED—Unexpected shutdowns; of furnaces caused by failure of some hidden or inaccessible part of a furnace are eliminated by suspended type construction in open hearths, it is found. This construction is stated to make it possible to schedule furnace repairs with a much higher degree of accuracy, the campaign life of a furnace being regulated by roof life. Furthermore, it eliminates danger of failure of furnace sections caused by difference in expansion rates between old and new silica brickwork. (p. 91)

INSPECTION PLUS—During the manufacture of hollow steel aircraft propellers in the plant of Curtiss-Wright, inspectors "comb" over every operation to insure precision workmanship. Several times during each blade's manufacture x-ray photos are made of the entire blade. As many as ten to twelve 13 x 17-inch negatives are needed to cover one blade. Nothing is left to chance—each operation, of necessity, must be perfect. Defects that cannot be remedied lead to scrapping the blade. (p. 100)

NEWSENG ENGINEER NEWSENG ENGINEER NEWSENG ENGINEER

Fundamentals of

Forging

Continuing his discussion of factors affecting forging design, the author reviews design characteristics of forging machine and press forgings, heat treating considerations, amount of metal to be allowed for subsequent machining operations

By WALDEMAR NAUJOKS

DESIGN of impression die forgings to be made on the forging machine has some problems similar to those in the design for drop forgings. Consideration must be given to thin sections, narrow ribs, and other factors that tend to promote quick cooling on portions of the forging. However, the forging machine does not have the draft requirements of the drop forging, and most of the parts that are adapted for forging machine work can be produced without draft.

The forging machine develops flow of metal by upsetting or gathering metal and spreading it out to make the shape of the forging. Symmetrical round shapes such as gear blanks, pinion blanks, flanges, hubs, bolt heads and other similar shapes are well adapted for production in the forging machine, within limits of capacity. Many of the parts mentioned may contain a straight hole for the shaft, and in most instances, the holes can be included in the design of the forging. Since pushing the header tool against the end of the bar tends to upset and spread the forging stock, parts with deep pockets, such as socket wrenches, can be made to close tolerances.

Irregular shapes, such as clevises and yoke ends, can be made on the forging machine. Similarly, bolts with flat T heads, trunnions and other irregular shapes are products of the forging machine.

Forgings made by the forging machine generally have surfaces that are comparable to those obtained as a drop forging. It may be more difficult to keep the scale from the die impression on the forging machine than on the drop hammer where long sections with deep holes are being forged. However, good scale blowing devices generally solve the problem. Where heating is done electrically by induction heating, the scale problem is eliminated for practical purposes. Deep holes, such has holes in steel forged shells, can be designed without draft. Figs. 81 and 82



Fig. 81-Cluster gear forging

Fig. 82—Pinion rack for power shovel


Fig. 83—Outside (left) and inside (right) tubing upsets

illustrate typical designs for forgings made on the forging machine.

Tubing can be upset to advantage in the forging machine. For outside upsetting, where the inside diameter remains constant and the metal is added to the outside diameter, the size and thickness of the upset portion of the tube forging can be held to normal tolerances by the die pocket provided. For inside upsets, where the outside diameter of the tubing remains constant and where the extra wall thickness is added to the inside diameter, it is difficult to control the length of the inside upset except by length of heating, since die shoulders cannot be provided. Special furnaces for control of the length of heating, or induction heating, are used generally for tubing upsets. Fig. 83 illustrates tubing upsets made on the forging machine.

Press Forging Design—Design for impression die press forgings must consider two general groups of forgings: (1) Brass and bronze forgings and (2) steel forgings in the various steel alloys. Press forgings in brasses and bronzes have been made and used for several decades while the use of the forging press on steel forgings developed more recently, and with the building of the modern powerful and rigid forging presses.

Forgings in most of the available brass compositions can be designed to almost any shape desired. The brass forging composition is capable of being extruded as well as being flowed, and this permits



the making of shapes that are not practical in the narder compositions such as steel. Bronzes can be extruded to a lesser degree than brass because they are somewhat stronger. The draft requirements on prasses and most bronzes are very small. Draft angles from 3 degrees to no draft are common as against the normal 7 degrees for drop forgings. Thin ibs and high bosses can be made without undue dificulty in brass and bronze. Fillets and radii can also be smaller than on drop forgings.

Where pockets and bosses are included in the brass and bronze forging, it is desirable to use fairly good adii if the design permits, using a minimum of about ./16-inch radius on brass press forgings up to about 0 pounds. Much greater freedom in design is pernitted on brass and bronze press forgings than is lesirable on similar parts in steel as drop forgings.

Press forgings in carbon and alloy structural steel over a large variety of shapes. The forging press is specially adapted to symmetrical forgings such as gear blanks, pinion blanks, disks, cups and similar hapes. Most of the symmetrical shapes can be made n the forging press with lesser amount of draft han on the drop hammer. Ejecting devices, usually ermed "kickers" can be used with mechanical type of forging press for pushing out the forging from

the bottom die, particularly where the forging has a fairly large or rigid center hub. Where the kicker can be used, lesser draft, or none at all, is specified. Fig. 84 illustrates typical forging press designs. Shapes that are not symmetrical may be produced in the forging press by making the forgings in pairs to obtain the required balance. It is also possible to prepare suitable blanks for the forging press by use of preshaped bar stock, by hammer equipment for preshaping, or by preshaping on the forging ma-

Machining Allowance - The forging, in most instances, is subjected to one or more machining operations. These are used to shape certain sections of the forging so that the part will have the proper shape, fit and tolerances at the points of machining. Some forgings, such as a drop forged bucket tooth for use on a clamshell digging bucket, usually require no machining beyond drilling several holes in the bucket tooth so that the tooth can be bolted to the bucket. Some impression die forgings require machining on one surface so that the machined surface can be fitted more closely or more exactly to another metal member.

Drop forgings such as connecting rods require several machining and grinding operations to obtain the close fitting tolerances necessary on the part to enable it to serve its purpose in the motor. Wherever a surface on a forging must be machined, it is necessary to increase dimensions to allow for metal removal by machining. The amount of metal to be allowed for machining is a question for the designer to answer. From the machining viewpoint, the allowance should be little as possible, since machining time tends to increase with more metal to be taken off.

However, if the amount of metal allowed for machining is too small, too much time may be used in putting the forging into the machine for the machine work because the forging must be centered more exactly. The designer must then allow enough metal for machining so that the setup time in putting the forging in the machine is not excessive and the allowance is not so much that it causes excessive machining time.

Much depends upon the type and age of the machine to be used. Modern, heavy duty machines that are built today are designed for fast heavy machining. A little extra finish on the forging is not too important. On the older and slower machines

Previous articles in the current forging series appeared in the following issues of STEEL:

June 7, p. 100 June 21, p. 98 July 5, p. 76 July 19, p. 99 Aug. 2, p. 91 Aug. 16, p. 94


Aug. 30, p. 59

Sept. 13, p. 100 Sept. 27, p. 89 Oct. 11, p. 101 Oct. 25, p. 78

Nov. 8, p. 96

ES A TRIMO () U



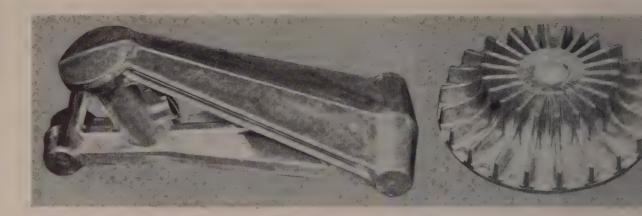

a small amount of excess metal to be machined may entail more of a problem. Generally considered, it has been found that in most cases a bit of extra allowance for machining is more to be desired than with a skimpy machining allowance. There are several points to be considered in determining the allowance for machining on forgings made with impression dies.

Exact Duplication Impossible—It is known from information and data given previously that it is not possible to make impression die forgings that are exact duplicates of each other. The variations may be slight, perhaps only a few thousandths of an inch on some special forgings but more normally the tolerances range from 1/64 to 1/4-inch for large forgings. Even with die impressions exactly to size, there will be some changing of size due to die wear. Other factors that tend to prevent impression die forgings from being exact duplicates are a difference in temperature of one forging from another at the final blow or machine pass, because of a slight die shift and because each piece of forging stock is not placed in the die impression in exactly the same place or in exactly the same manner.


Another point in considering the amount of allowance for finish is the condition of the forgings themselves. Some forgings may contain scale pits (previously described in inspection) and scale pits may be 1/64-inch deep on small impression die forgings and can be up to ½-inch deep on large impression die forgings. Forgings with considerable length in proportion to their cross-section area may contain a small amount of warp. Handling forgings to precise exactness in all phases of operations so that the impression die forgings are exact with each other is the ideal goal, never quite attained in commercial practice. This makes it important to consider all conditions in determining the amount of allowance for machining.

Allowance Increased for Complicated Operations—It has been found that small and medium-size impression die forgings which require normal machining operations such as turning and milling shoul have an allowance of 1/32 to 1/16-inch on all surfaces for machining operation. This allowance shoul be increased for the more complicated machinin operation where it is necessary to be certain that goo clean metal is reached. Where a surface is bein machined to remove surface decarburization, 1/16 inch is usually allowed on small and medium size impression die forgings. In other words, 1/16-inc of surface must be removed. Figs. 85 and 86 show forged parts before and after machining.

On larger impression die forgings, those normall weighing over 100 pounds, the allowance for machining on each surface should be increased to about \(\frac{1}{2}\) einch for each surface. When the impression difforging gets up over 500 pounds, \(\frac{1}{2}\) einch is usuall desired for each surface to be machined. On man of the large forgings, it is necessary to study the individual design to determine the various condition which may affect the machining allowance requirements. Warp, for example, may be more difficult to remove in a very large forging than in a small one Draft, scale, shrinkage and possible die shift are other points of consideration.

Weldless Forged Rings—Allowance for machining on smith or hand forgings is greater than on impression die forgings because smith or hand forging are made without the use of die impressions. Smitt or hand forgings have a greater variation from on forging to another forging of same part. Smith forging

Fig. 87—Allowance for machining on smith forgings. Broken lines indicate machining allowance on smith forged ring (A) and on smith shaft forging (B)



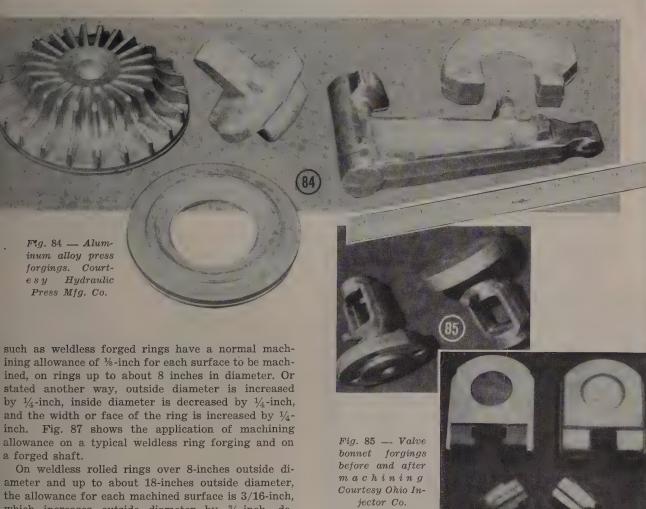


Fig. 86 — Gate valve wedge forg-

ings before and

after machining.

Courtesy Ohio In-

jector Co.

On weldless rolled rings over 8-inches outside diameter and up to about 18-inches outside diameter, the allowance for each machined surface is 3/16-inch, which increases outside diameter by \%-inch, decreases inside diameter by \%-inch, and increases width of face by \%-inch. On weldless rolled rings over 18-inch outside diameter the machining allowance on all machined surfaces is \\(\frac{1}{4}\)-inch, which increases the outside diameter by \(\frac{1}{2}\)-inch, decreases inside diameter by \(\frac{1}{2}\)-inch, and increases the width or face by \(\frac{1}{2}\)-inch. For weldless rolled rings over 36 inches outside diameter, a greatest allowance must be used.

Smith forgings on parts such as gear blanks, hub blanks, stems, bars, shafts, and similar parts usually require at least $\frac{1}{8}$ -inch machining allowance on all machined surfaces for the small and medium small forgings. As the forging becomes larger, the machining allowance is increased. Forgings weighing about 100 pounds usually have $\frac{1}{4}$ -inch machining allowance for each surface to be machined. Where parts are subjected to warpage due to long length, it is desirious usually to provide ample allowance for machining.

Pockets and similar depressions worked into the smith forging must have greater than normal smith allowance for machining because it is not practical to try to locate the pocket to close exactness. For a rough general rule, the smith forging should have at least twice the machining allowance that is given to the impression die forging.

Heat Treating Considerations—Heat treating the

forging before any machining operations, has become more prevalent in recent years, due in part to the newer steels which permit machining at higher hardnesses and to the modern machines which are capable of machining the tougher heat treated steels. Naturally, the designer is faced with the problem of specifying the point of heat treatment; no general rule can be given. It is possible to indicate the advantages of heat treating first, along with the disadvantages and to list the advantages of machining first and then heat treating along with the disadvantages. Usually a consideration of all the factors will enable a procedure to be selected.

Forgings machined before they are heat treated to the specified hardness or toughness, are usually machined in the normalized or annealed state. Normalized or annealed forgings usually machine with considerably greater ease (*Please turn to Page* 110)

Seen and Heard in the Machinery Field By GUY HUBBARD Machine Tool Editor

"IN-PLANT" TRANSPORTATION: Until recently techniques of materials handling on a nation-wide scale had developed far beyond those for getting things to the right place at the right time within the factories and machine shops of America. In other words, in this land of magnificent distances, the history of waterway, highway, railway and airway transportation makes up a much bigger book than does that of "in-plant" transportation.

Those of us who attended the Second Materials Handling Machinery Manufacturers Conference sponsored recently by Westinghouse Electric Corp. at Buffalo were impressed, however, by the rapid strides now being made in the mechanization and co-ordination of what might be called "inside transportation" of materials, parts and finished products in American industrial plants.

This rapid progress is due in part to the fact that more and more industrial plants involve magnificent distances within their own walls, in part to the fact that current wage scales preclude the use of men as burden-bearers, and in part to the fact that only through mechanization can materials handling be made to keep pace with production machinery.

It was emphasized that materials handling represents the largest item in manufacturing cost today in the production metalworking industry. Many instances were cited where—through installation of the latest machine tools—machining costs have been cut to what appears to be an irreducible minimum. The only way to attain greater efficiency is to get the material into these machines faster and more conveniently, and get the finished work (and likewise the chips) out of the machines faster and easier.

Inasmuch as this sort of thing tends to make a production shop in effect "one big machine", the need for standardization of materials handling units becomes apparent. In this respect the builders of materials handling equipment today find themselves in very much the same position as the builders of railway equipment found themselves about 80 years ago—when short lines began to be linked into transcontinental systems.

The master car builders association got busy on that problem and it was not long before railway equipment was standardized from coast to coast making the American railroads the envy of the world. If history repeats itself, American industrial co-operation and American genius at standardizing without hindering the individual initiative of participating companies will make it possible for "in plant" transportation rapidly to catch up with long distance transportation.

Many of the standardization problems involved are similar to those which have been ironed out within recent years through conferences between the automotive industry, the machine tool industry and the electrical industry. Electrical drive and control play big roles in mechanized handling—just as they do in drive and control of machine tools.

The materials handling machinery conference at Buffalo not only was an important step toward standardization but also it emphasized that manufacture and sale of materials handling machinery hold tremendous possibilities for those who go at this business with understanding and with vigor. Obviously that is why Westinghouse is interested.

WE SALUTE TED MILLER: Everyone in the gear and machine tool industries knows E. W. (Ted) Miller of the Fellows Gear Shaper Co. Many know him as "the sage of Vermont", a title which he earned through years of public service with organizations such as the American Gear Manufacturers Association, of which he was president from 1932 to 1934.

Few will believe me, however, when I say that or Friday, Nov. 5, 1948, Ted Miller rounded out 50 years of service with the company. The day following he became president of the company upon retirement from that office of E. J. Fullam, now chairman of the board.

Ted Miller is one of four noted machine tool men who came to Springfield, Vt., in the late years of the 19th Century from the Torrington, Conn., district The other three were the late James Hartness, who became president of Jones & Lamson Machine Co. and one-time governor of Vermont; George O. Grid ley, inventor of the Gridley automatic screw machines, one-time vice president of the Windsor Machine Co., which was bought out by National Acm Co. of Cleveland, and one of the founders of the New Britain-Gridley Division of New Britain Machine Co. and the late E. R. Fellows, inventor of the Fellow gear shaper around which the company of that nam has been built up.

To my way of thinking, one of Ted Miller's fines characteristics is his loyalty to the memory of E. R. Fellows. I agree heartily with Ted Miller's conviction that E. R. Fellows—who was a most unassuming gentleman—actually was one of America's outstanding geniuses in the design and construction of high production, precision machine tools. I hope one day to be able to join forces with Ted Miller in writing biography of Mr. Fellows.

At the same time, I take this opportunity again temphasize that Ted Miller is a noted machine too man in his own right. In the long journey from lather hand to president, he has served as chief end gineer, general manager, vice president and direct to he has been granted nearly 80 patents, and he has been awarded an honorary degree in mechanical end neering by Stevens Institute of Technology. Telephology and Miller certainly rates a salute!

After a period of rather spectacular development, the processes of making things from metal powders are now established as economically effective, especially in producing parts of porous, high melting point, "nonalloying" metals and combinations of metals and non-metals

Current
Trends
in

ONTINUED expansion and improvement of the art of making things from powdered metals and other materials is reflected both product and equipmentwise as powder metallurgy techniques take their place in the mass production scene. Major progress has been in combining procedures and in designing parts, recognizing the possibilities and limitations of the various production steps.

As is true of every other metalworking technique, the processes of fabricating parts from powders have some distinct advantages, among which are: Speed and economy of production, uniformity, purity of metal content, variety of properties, ability to combine metals and nonmetals which cannot be alloyed in any other way, reduction or elimination of machining and consequently of scrap loss by maintenance of fairly close dimensional tolerances. It is often possible to briquette and sinter a piece to the finished size to tolerances of plus or minus 0.001-inch. Some products, such as tungsten for light bulb filaments and electrical contacts, self-lubricating porous metal bearings and clutch facings cannot be fabricated economically by any other method.

Conversely, powder metallurgy's practical, competitive scope is limited by die cost and press capacities to quantity production of relatively small parts. Certain restrictive rules must be observed in design of the parts because powdered metal does not flow like molten metal. Physical properties are not so good as they are in wrought or cast materials, although they are sufficient for many purposes. Raw materials cost more per pound than solid metals.

Mixing-Production of a powder metallurgy part

Fig. 1—Complex powder metal parts of large irregular cross-sections can be produced to close tolerances on this 345-ton briquetting press designed with a hydraulically-controlled floating die table and core rod rams. Courtesy E. W. Bliss Co.



Powder Metallurgy

commences with weighing, blending and mixing of the powders, if two or more materials are to be used. Constituents are blended to combine metals with different chemical or physical characteristics, or metals with nonmetals. Two different methods are used for mixing: (1) Dry blending of different metal powders to form a base stock of mixed materials, and (2) addition of binders and lubricants to individual batches.

Dry blending is usually done in large quantities, while paraffining or wet blending, is almost always resorted to in mixing small lots. In the latter, wax or binder of some type is dissolved in a volatile liquid, such as naphtha or carbon tetrachloride. This solution is added to the dry powder in a mixer to produce a thin paste. As the mixing progresses, the volatile ingredients pass off, leaving a dry powder. In some cases, heat is desirable in speeding up removal of the volatile substance.

In applications where continuous porosity is required for lubrication or for filtering, openings between particles must be kept open. To do this, ammonium chloride or other volatile solid ingredients are mixed with the powder before pressing and then evaporated before or during sintering, depending on furnace design.

Pressing—After mixing, the granular powders are ready to be formed into the shapes desired. This is done by compacting them in a die, under great pressures. Usual pressures are somewhere between 10 and 50 tons per square inch. The average is around 30 tons.

At the present time, most parts are formed cold, but hot pressing is receiving considerable attention experimentally. The idea of hot pressing is to apply heat at the die, thereby eliminating the subsequent sintering step. For ferrous metals, temperatures range from 1100 to 2000° F and for nonferrous, from 200 to 900° F. One advantage of hot pressing methods is that of working with considerably lower pressures than in cold pressing. Hot pressing offers a


means of producing dense, complex-shaped parts, but mold materials having high strength at high temperatures are not fully developed. Another major difficulty arises in protecting the part from oxidation during pressing.

In room-temperature pressing, compacting pressures and speeds depend upon the size and shape of the part being produced, as well as density desired. Both mechanical and hydraulic, and combination mechanical-hydraulic presses are used, with cold compressing performed on either moderate speed single punch or on high speed rotary multiple punch units, most of which are equipped to feed powder, compress and eject the "green" compact automatically. Production on high speed rotary presses, using multiple sets of dies, can reach as high as 1000 pieces per minute. Contrary to the usual conception of powder pressing speeds, one theory holds that slow compression is not so effective as a quick stroke. A fast powerful stroke is said to impart greater uniformity in the briquetted part. To permit escape of trapped air a brief dwell under pressure is sometimes re-

Press Design—Basic problems in press and die design are to secure proper density and density distribution in the compressed piece and at the same time to meet accuracy requirements. Proper die fill must be provided and sufficient pressures furnished. Present trend of the industry seems to point toward machines with greater pressures and more intricate movements to produce parts of complex shapes.

Powder is usually introduced into the die cavity volumetrically from a hopper. In order to obtain uniform density and dimensions in powdered metal parts, it is necessary to fill the die cavity with a uniform fill of powder. Density of the compact exercises profound effect upon the mechanical and electrical properties of the finished part. Other factors in the briquetting process are speed of compression, stroke and pressure control. For complicated parts, elaborate combinations of multiple punches are utilized. General practice, however, is to compress from the top and bottom, with suitable knockouts below.

Dies—Powder metallurgy dies are generally made of high carbon, high chromium steel, high speed steel

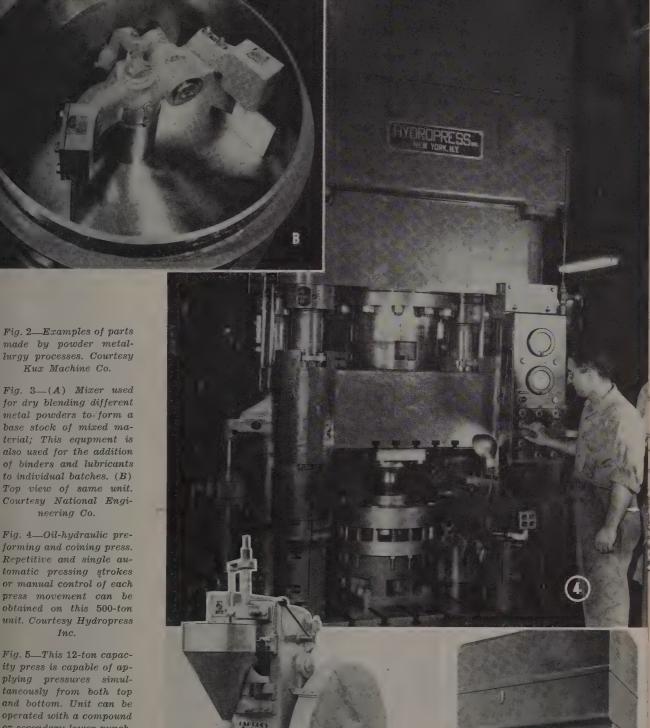

or secondary lower punch, adjustable stroke or pressure, by a simple cam change. Courtesy F. J. Stokes Machine Co.

Fig. 6_Maximum press tonnage is adjustable from 40 to 400 tons on this manually-controlled vertical-horizontal press. Pump and motor are mounted on top of the self-contained unit. Courtesy Watson-Stillman Co.



or tungsten carbide, with as low a coefficient of friction as possible. Die wear, where press operations will permit, can be reduced by lubricating the die with graphite flakes, stearic acid, glycerin or other lubricants. The inside diameter should be ground and then lapped longitudinally because the resulting smoothness aids in ejecting the "preforms" or briquettes. Dies are usually machined with a small amount of relief (taper) to facilitate ejection.

Compression ratio is one of the factors controlling depth of the die. It may be defined as the ratio of the density of the compressed compact to that of the unpressed powder. In most cases the compression ratio is somewhere in the neighborhood of 3 to 1. Where extremely fine powders are used, it may be as high as 6 to 1 or even higher. This is not predictable, but varies greatly from powder to powder.

Fig. 7—Tantalum, tungsten and molybdenum metal powders are compacted under heavy pressures on this 3000-ton triple-action hydraulic press to form bars or ingots weighing up to 6000 grams. Courtesy Baldwin Locomotive Works

Fig. 8—Continuous roller hearth furnace for sintering ferrous and nonferrous pressed powder parts.

Operating up to 2050° F, it uses an Endogas atmosphere. Work is carried through furnace on trays.

Courtesy Westinghouse Electric Corp.

Fig. 9—Endothermic type gas cracking unit or generator which produces a gas rich in hydrogen and carbon monoxide. Courtesy The Electric Furnace Co.

Fig. 10—Four-column, self-contained hydraulic briquetting press equipped with top and bottom rams, bottom core and horizontal charger. Capacity is 260 tons on the top ram and 240 tons on the bottom.

Courtesy Lake Eric Engineering Corp.

Fig. 11—Mesh belt conveyor furnace for sintering powdered metals in the presence of an externally-prepared atmosphere. Courtesy W. S. Rockwell Co.

Fig. 12—Hydrogen atmosphere furnace built for sintering powdered metal gears at 2150° F. Courtesy Charles A. Hones Inc.


Powder Metallurgy

In designing dies for parts such as bushings, the relation between length and diameter must be taken into consideration; flat and thin parts demand great care to be sure the section is not too thin (not less than 0.032-inch). Large and abrupt thickness changes, uneven cross sections, narrow and deep splines, sharp corners, internal angles without fillets should be avoided. At present, certain structures cannot be pressed without presses capable of highly complex actions: Holes not parallel to the axis of compression, horizontal grooves and undercuts. Allowance must be made in die design for shrinkage in the subsequent sintering step.

Transformation to Finished Part—After the compressed part is ejected from the die cavity by action of the lower punch, it is heat treated or sintered to cause coalescence or welding of the individual powder particles, thus forming a strong piece. Often, a metal-to-metal contact does not exist in the unsintered compacts, since the particles may be separated by thin oxide films. This structure is fundamentally changed by sintering in a controlled reducing atmosphere. Real metallic bonds are produced in a short time and at temperatures usually below the melting point of the metals involved.

With the aid of an electron microscope, Charles Hardy Inc., New York, in co-operation with the RCA laboratories at Princeton, N. J., recently revealed that under proper sintering conditions particle boundaries are completely removed. Most production sintering work is done at greater than two-thirds of the melting point; in general, strength increases with temperature. To complicate sintering practice are such factors as growth or shrinkage of dimension (as high as 10 per cent), internal and external effects of gaseous reactions.

Controlled reducing atmospheres are usually employed for sintering. Choice of an atmosphere depends upon the powdered material, and upon the initial and operating cost of the gas generator. One








Fig. 13—Carbonyl iron powder at 750X.

Courtesy Antara Div., General Aniline

& Film Corp.

the familiar punch press, or else fe back into the forming press.

Metals Used-The most widely use powder metallurgy metals and prod ucts fabricated from them present surprisingly long list of familia items. Refractory metals were amon the first to be formed by powder met allurgy methods. Techniques original inally developed for obtaining an processing tungsten powder are now applied to molybdenum, tantalum columbium and to other high meltin point metals. Wire, electrodes, elec trical contacts, electronic controls ar some of the products manufacture from these metals. Cemented car bides, for cutting tools, dies and othe wear resistant products are powde metallurgy products. Self-lubricating bearings, metal filters, magnetic parts clutch facings and brake linings car be made by the powder-press-sinte processes.

Porous metals and alloys having a controlled permeability can be prepared by mixing a porosity-producing substance, such as ammonium bicar bonate, with metal powder, and their pressing and sintering. Copper, nickel iron, copper-zinc, copper-tin, iron nickel, stainless steel and nickel-molybdenum-iron are some of the materials studied in connection with preparing porous materials.

Copper and tin powders produced to varied density and particle size are used principally in the manufacture of oilless bronze bearings and parts. Primary use of silver in powder metallurgy is in the production

all-purpose sintering atmosphere is pure dry hydrogen. This atmosphere is used for Alnico, stainless steels or any alloy composed of an oxidizable metal and aluminum, or containing over 1 per cent chromium. Dissociated ammonia is a well known, high purity gas mixture. Iron and steel powders, brasses, bronzes, pure copper, tungsten and stainless steel are among the metals reported to be successfully sintered in dissociated ammonia. Combusted gas, resulting from the partial combustion of hydrocarbon fuel gases with air in atmosphere gas converters, is the most common gas used for sintering furnace atmospheres.

Two temperature ranges are used for sintering: One with a top temperature of 1700° F for copper base and low melting point alloys; iron base alloys take a high temperature of about 2100° F. Sintering furnaces are similar to brazing units, with pre-

heating, high temperature and cooling zones, and some means of propelling the parts through, either hand pusher, mechanical pusher, or continuous belt.

Usually, in sintering pure metals and many combinations of metals, no melting takes place. When low melting point metals are mixed with high melting point materials, the former metal may be fused, as in the sintering of various hard carbide compositions.

Where additional strength, extremely close tolerances (bronze and iron parts can be held to 0.0005-inch per inch perpendicular to the axis of compression) high physical properties or high surface finish are specified, it may be necessary to coin or size the sintered part. Sizing usually takes place on some special modification of

Fig. 14—(A) Granular nickel, 160X, (B) irregular cupro-nickel, 40X, (C) elongated solder, 40X







В


7



Standard makes or special designs and according to individually exact specifications, they are all precisely manufactured by Chandler. The cold wrought, uniformly high quality metal fasteners that flow from the Chandler plant help hold together the motors and machines of today and tomorrow

CHANDLER PRODUCTS CORP.
1491 CHARDON RD. CLEVELAND 17, OHIO









of materials for the manufacture of electrical contacts. Combinations of silver with nickel, tungsten, molybdenum, iron, graphite and metal oxides are readily fabricated by powder metallurgy processes.

Metal-Ceramic Materials — While the combinations of metallic and nonmetallic materials such as the friction composition mentioned above, are well known, there are many more combinations of metal powders and ceramic materials. The relatively new field of metal-ceramics is being rather thoroughly explored. Current research is concerned with two different groups of composition: (1) Mixtures of metallic and ceramic powders; (2) combinations using different layers of metal and ceramic powders. Both mixtures and multilayer materials are developed to form high temperature-resistant compositions. Separately, mixtures are used to fabricate electrical semiconducting materials or electrical resistors; multilayer compositions can be developed for electrical products such as condensers. Results of studies presently being conducted are promising.

Some commercially important work has been done on combining iron powder with graphite to make plain carbon steel and in preparing nickel steels from elemental metal powders by powder metallurgy methods. Conclusions reached as a result of investigations on nickel steels point to the fact that diffusion of the alloying elements takes place sufficiently in the solid state to change the mechanical properties of the nickel steel as compared to the properties of plain carbon steel. Carbon content can be controlled to within 0.10 per cent.

Powder Quantities—This year, the Metal Powder Association estimates that nearly 30 million pounds of products will be manufactured by powder metallurgy processes. Products will range in weight from about 0.001-ounce to 100 pounds and in size from 0.001-square inch to approximately

20 inches in diameter. Copper, iron, lead, tin, aluminum, and alloy powders in that order will continue to be used in greatest quantity, but almost all commerically-significant metals will be represented along with certain ceramics and powdered glass. For example, copper alloy containing titanium with other elements was recently adapted to the process of making glass-to-glass and glass-to-metal seals. Accompanying table reflects prices of most-used metal powders.

As to quantity consumption of powdered metal products, the automotive and aircraft industries will probably lead, using thousands of gears, cams, bearings, friction materials, sleeves, bushings, rings, filters and many other smaller parts. Metals such as iron can be obtained with a wide range of properties. Each type is applied to parts where its peculiar properties are most adaptable.

One method of cooling jet engine parts in contact with high temperature gases extends the field of application of porous metals. The socalled "sweat cooling" principle consists of fabricating the part to be cooled of a porous material through which the cooling fluid can be forced. Temperature of the coolant moving in opposite direction to the heat flow gradually increases while passing through the porous material. On the heat-exposed surface, the coolant forms a protective layer. Very close control of permeability is required in this application, because a given rate of flow of coolant under certain conditions of pressure drop must be assured. One of the problems facing researchers is to develop porous alloys with maximum permeability and minimum porosity. Since tensile strength decreases with increasing porosity, the importance of solving this problem is quickly evident, where tensile strength is a significant factor in parts' design.

Variables to Be Controlled—To in-(Please turn to Page 111)

Fig. 14 (continued)—(D) dendritic silver, 40X, (E) porous copper, 40X, (F) nodular aluminum 75X, (G) machined magnesium, 72X, (H) plate nickel, 75X, (I) flake bronze, 40X







MODERNIZED facilities which make possible production of sheet steel in coil form up until the final operation of shearing to size have been installed at the Irvin Works of Carnegie-Illinois Steel Corp.

Major additions to existing sheet-steel producing facilities include: An additional slab-heating furnace for the 80-inch hot-strip mill; conveyors and shearing equipment with other auxiliaries added to the existing 80-inch pickling line; a new 56-inch continuous pickler; new shearing equipment in the finishing department; new sheet-coil annealing furnaces; handling units added to the temper mills; and pilers for cold-reduced sheet-shearing lines.

A new, fourth furnace has been added to the three that formerly supplied heated slabs to the 80-inch mill. It is a zone-controlled, triple-fired, end-charged, end-discharged, continuous-type furnace. Maximum capacity of the new unit is 105 tons per hour, when heating a double row of cold slabs, 6 to 8 inches thick and 8 feet, 10 inches long, to 2350° F. Design and control features make it possible to heat slabs from 3 to 8 inches thick and 20 to 60 inches wide, and from 60 to 216 inches long to uniform rolling temperature throughout.

New equipment for the 80-inch raw coil pickling line includes a cold water-spray rinse tank, hydrochloric acid dip tank, cold water-spray rinse tank and hot-water dip tank, looping pit,

IRVIN WORKS Modernization Program

. . . effects improved product quality and processing efficiency

delivery pinch rolls, side trimmer with scrap chopper, inspection table, drag bridle, overhung mandrel-type coiler, driven pallet-type conveyor and scale. Support rolls, wringer rolls, tables, guides, fume-exhaust system, and other auxiliaries complete the installation. An existing dryer, entry pinch rolls and guides, unfolding rolls and upcut shear were completely rebuilt and relocated in the line.

The 56-inch raw coil pickling line is designed for continuous pickling and side trimming of hot rolled material 18 inches to 48 inches finished width and 0.050-inch to 0.250-inch thick.

Pickled product is delivered from the line in coils 20 inches to 31 inches in inside diameter, by 55 inches to 80 inches outside diameter, and weighing up to 42,000 pounds. The line normally operates with material 0.070 to 0.150-inch thick and is designed for most economical operation within this range. Welds that join successive coils to each other are sufficiently strong and free of upset

after flash trimming to permit subsequent cold rolling at full mill speed.

Coil-feeding and welding equipment are designed for continuous operation of the pickling section at 230 to 420 feet per minute, depending upon strip width


The pickling section includes 280 feet of active pickling length and is divided into four brick and rubber lined tanks, with acid-heating and fume-exhaust systems. The necessary equipment for rinsing and drying has been provided.

A continuous motor-driven chain-type conveyor, 575 feet long, transports hot-rolled steel coils weighing up to 20,000 pounds, on side or end, at floor level, from the raw coil storage building to the 80-inch pickle line. The conveyor has a capacity of approximately 100 coils, making a continuous total load of about 750 tons. Speed is 15 feet per minute, controlled by electrical equipment suitable for 30 start-stop operations per hour under full load.

Numerous major changes were made to the sheet annealing department in conjunction with the mod-

Fig. 1—Discharge end of slab reheating furnace battery. Unit in foreground is new furnace recently installed



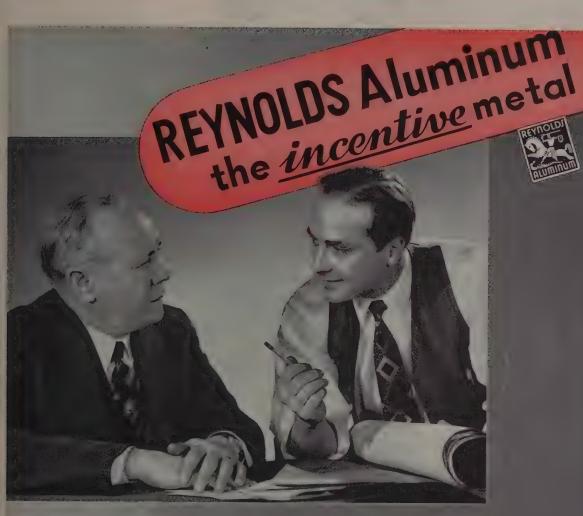

Why demand must mean division at Wolff Metal Service

The new postwar Reynolds Aluminum, in its many forms, has attracted the alert minds of industry because, in fabrication, it offers so many advantages that save time and speed-up work. Today, the applications of this incentive metal are fanning-out everywhere in the territory served by Wolff Metal Service—for no word is better understood, nor spread faster, than lower cost of production.

No less than the midwest industry that it serves, does Benjamin Wolff & Company share this interest in the development and expansion of the use of Reynolds Aluminum. In the face of a demand that now overwhelms supply, there is no alternative but to allot the stock that is available so that it may help

the many a little, rather than greatly benefit a few. Even so, to do one's best in this matter of allocations can never be best for all. If that hurts you, please remember that there are many reasons why it hurts us more.

Your calling RE-public 7-9100 is always appreciated.




Carbon Steel • Stainless Steel • Aluminum • Copper • Tinplate • Metal Decorating

BENJAMIN WOLFF - COMPANY

General Office and Warehouse — 5800 South Seeley Ave., Chicago 36, Ill.

Wisconsin Office — 176 W. Wisconsin Ave., Milwaukee 3, Wis.

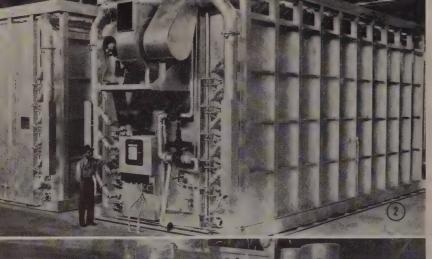

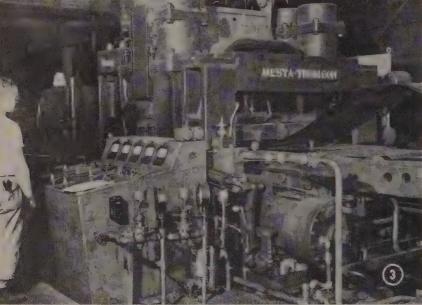


Fig. 2—New gas-fired radiant-tube-type annealing furnaces at Irvin works. All necessary temperature control equipment and other control mechanisms are mounted on one end of the furnace body. Normally unit operates in position of furnace shown at left to protect controls from any possible damage

Fig. 3—Flash welder installed in the pickling line for joining coils end to end to provide a continuous feed for the pickling which removes scale and dirt from material prior to cold reduction

ernization program. One phase of this work included installation of 10 four-stand bell-type sheet-coil annealing furnaces and 22 bases for operations with these furnaces.

The four-stand furnace bases each will accommodate, in a single line, four coil stacks 40 inches to 48 inches in diameter, with a maximum height consistent with lifting clearance requirements. Stack height is at least 155 inches. Each of the new furnaces weighs approximately 100,000 pounds.

Numerous design changes were effected on sheet temper mills Nos. 1, 3, and 4. These changes permit processing 20-inch and 24-inch inside diameter, by 78-inch maximum outside diameter, 50,000-pound maximum weight coils on the mills Nos. 1, 3,

and 4, as well as individual sheets on mills Nos. 1 and 3. Three new, improved-type downtilters were installed to receive coils on end from an overhead traveling crane and deliver the coils on their sides onto the center of an apron-type coil conveyor.

The width of No. 3 mill was reduced from 84-inch to 56-inch roll face, and entry and exit tension roll bridles were furnished. The mill was speeded up to 2500 feet a minute, by means of new main-drive motors, motor-generator sets, controls, and so on, using existing equipment where suitable. Tension bridles were arranged to permit passing heavygage strip over the bridles.

Mill No. 4 was relocated between

mills Nos. 1 and 3, a position formerly occupied by mill No. 2.

New shearing and recoiling facilities for the cold-reduced product finishing department include a 54-inch, high-speed, side-trimming and sheet-shearing line; an 80-inch slitting and recoiling line; an 80-inch side-trimming and sheet-shearing line; a scrap baller; and scrap trap for conveying side scrap to baller.


Material to be sheared on the 54inch side-trimming and sheet-shearing line is cold-reduced, annealed and temper-rolled coils of regular carbon grades, 19 gage (0.0429inch) to 30 gage (0.0123-inch). Entering coils have an inside diameter of 24 inches and an outside diameter of 72 inches maximum. Width may range from 18 to 50 inches maximum. Maximum coil weight handled is 50,000 pounds. The line produces sheets within the length range of 30 inches to 144 inches in increments of 1/16-inch, and widths between 18 and 48 inches.

Cold-reduced, annealed and temperrolled coils of regular carbon steel grades, 14 gage and lighter, can be handled on the 80-inch slitting and recoiling line. Entering coils have an inside diameter of 24 inches and a maximum outside diameter of 72 inches. Coil widths range from 18 inches, minimum, to 77 inches, maximum, representing a maximum weight of 50,000 pounds. The line is capable of side trimming or slitting coils down to 12-inch minimum width, also for producing small coils for any width by shearing large coils.

One existing sheet-shearing line was dismantled and (using as basic equipment the flying shear, roller leveler, oiler, conveyors, scale, piler, and so on, from the dismantled line) a new 80-inch side-trimming and sheet-shearing line was constructed. Cold-reduced, annealed, and temperrolled coils of regular carbon steel grades, 11 gage and lighter, can be processed on this line. Entering coils have an inside diameter of 24 inches and a maximum outside diameter of 72 inches. Coil widths may range from 18 to 77 inches, with maximum coil weight limited to 50,000 pounds. The line produces sheets 221/2 inches to 180 inches long and 18 inches to 77 inches wide at a speed of 133 to 400 feet per minute.

The sheet-assorting type piler is capable of receiving 16 to 24 gage sheets, 18 to 77 inches wide by 45 to 180 inches long, from the sheet-shearing lines at an entry speed of 250 to 1000 feet per minute, and assorting them into prime and reject piles at a speed of 90 to 360 feet per minute.

AREFULLY DESIGNED TO DO THE WORK AND BRING A RETURN ON THE INVESTMENT

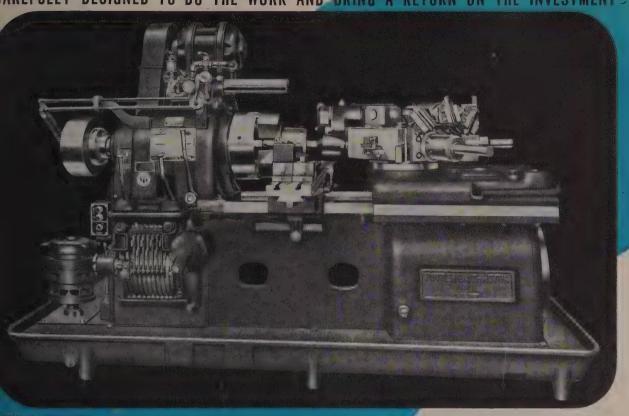

POWER-FLEX AUTOMATIC TURRET LATHE

SPECIFICATIONS

		5 D standard	5DE elevated	5DLX long travel and extended	5DELX
ED	swing over	25"	30"	25″	30″
ROSS LIDE	swing over	12"	17"	12″	17"
	travel each way	5″	5″	5″	5″
JRRET	no of faces	5	5	5	5
	slide travel	13″	13"	Ĩ6"	16"

Frankly, a powerful automatic turret lathe costs a great deal of money. Aside from the excellence of the work it produces, it should earn its own way and kick back a substantial profit. Potter & Johnston's 12,500 lb. 5D POWER-FLEX AUTOMATIC TURRET LATHE meets all these requirements. Powerful and rigid, it has 4 automatic changes of spindle speed while under cut; 3 selective automatic changes of feed; automatic binding of the turret following index; powerful, direct cross slide action and a constant high speed rapid traverse motion to the cross slide and turret slide. All these factors contribute toward greater flexibility and higher productive capacity. The 5D POWER-FLEX is provided with a pan base which serves as a coolant reservoir when required. The increased first cost of this construction is amply justified by the resulting permanency of alignment, freedom from scoring, and long life. Send us a blueprint of a casting or forging and we will tell you to the fraction of a penny the cost of machining it on the 5D POWER-FLEX. From that point on you can figure the advantages of the 5D yourself.

POTTER & JOHNSTON CO.
PRATT & WHITNEY


BEARING TESTS

. . . . determine safe loads

STUDY of bearing performance through measurements of the combined frictional and thermal behavior in journal-bearing lubrication has led the National Bureau of Standards to a practical graphical procedure for estimating safe bearing loads.

Using a four-bearing friction machine (pictured below), the bureau worked with bearings of two diam-

eters, in two length-diameter ratios and three clearance-diameter ratios, and at two journal speeds. Three oils, of different viscosity, were used at three oil-inlet temperatures. Particular attention was given to the resultant effects of the combined hydrodynamic and thermodynamic actions involved in bearing operation with forced-feed lubrication.

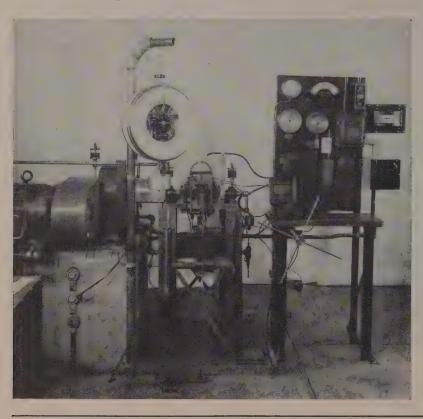

The machine consists essentially of four test bearings on a common shaft, these being mounted in self-aligning ball-bearing swivels which are prevented from rotating by flat springs. The two outer bearings are fastened to the housing while the two inner ones are located in plates that slide in guides. The complete housing floats on a horizontal shaft and acts as a cradle dynamometer. Load is applied by hydraulic jacks under the two inner bearings.

Frictional-Torque Data

A study of the frictional-torque data for operation under load indicates that when a bearing is operating at constant speed, using a given oil at constant oil-inlet temperature and oil-feed pressure, an increase in load produces an approximately proportional increase in frictional-torque. The increase in torque with unit increase in load is influenced chiefly by the viscosity of the oil, the oil-inlet temperature, the oil-feed pressure, the clearance-diameter ratio, and the length-diameter ratio.

The results also indicate that, under these operating conditions, an increase in load causes a proportional increase in the fluidity of the oil in the bearing. For a given oil, oil-inlet temperature, and oil-feed pressure, this increase in fluidity is a function of the speed of the journal, the diameter of the journal, the length-diameter ratio, and the clear-ance-diameter ratio.

The straight-line relationship between fluidity and pressure provides a graphical means for estimating safe loads which should hold reasonably well in most bearing applications since under conditions typical of normal high-speed, high-temperature operation practically all of the heat generated in the bearing is carried away by the oil.

Nailable Steel Flooring Put in Railroad Cars

Progressing in the Altoona, Pa., shops of the Pennsylvania railroad is the installation of nailable steel flooring in 200 gondola cars. This all-purpose flooring, developed by Great Lakes Steel Corp., Detroit, consists of curved-flange steel channels separated by grooves into which ordinary nails can be driven.

Cars equipped with this flooring can handle finished goods which must be blocked in place by nailing to the floor as well as heavy rough materails which require a steel floor. It is expected that the Pennsylvania's cars will be particularly useful at steel mills served by the railroad since the same car, after discharging its load of inbound raw materials, can be loaded with outgoing finished products. This installation, reportedly the largest to date, is but one being carried out by 25 railroads.

Production Uses of Electric Heat Studied

Such types of industrial heating equipment as midget soldering irons and huge foundry furnaces were among the hundreds of applications studied by electric utility engineers at a General Electric Co. sponsored course held at Sacandaga, N. Y., re-

cently. Purpose of the course was to study the ways in which electric heat could be extended throughout industry to cut production costs and improve product quality. Methods already in use in the manufacture of a variety of products and case studies of different types of electric heating equipment which have cut production costs were presented.

One paper presented the case of a manufacturer of domestic hot water heaters who was able to increase the production of one part 50 per cent by changing over to electronic brazing. Another stated that electric furnace brazing has made possible simplified product design, savings in material and lower production costs.

An Evaluation of BASIC BRICK in the OPEN HEARTH Nº.7 BASIC ENDS Nº.4 SILICA CONST. Practical development of the basic roof started as a series of TOTAL SHOP panel tests and eventually a complete basic roof was constructed on an otherwise conventional silica furnace. Findings demonstrated the practicability of the suspended construction and

INCREASED use of basic brick in open hearth furnaces has been one of the outstanding refractory developments of the last decade. Widespread application of basic materials to open hearth construction is the result of operators' efforts to increase production in the limited space available in the older shops. While the rapid increase in the use of basic brick has occurred in the last four years, present method of application is the result of experience gained since basic brick were first used above the slag line.

First application of basic brick in the open hearth furnace was made in the early 1890's when imported magnesite brick were used to form the subhearth of the furnace. Prior to that time, the subhearth was formed of magnesite or dolomite mixed with tar, and rammed into place. The burned magnesite brick subhearth, with a top surface of rammed in or burned magnesite, propointed out the necessity of complete basic ends

By VERNON W. JONES

Superintendent, Open Hearth Department Armco Steel Corp. Middletown, O.


vided a much improved furnace hearth.

In 1895 the first magnesite brick were manufactured in this country, followed shortly afterward by the first domestic chrome brick. chrome brick were used as a buffer between the magnesite brick and the silica brick. Both magnesite and chrome brick of this period were of low hot load capacity and had a tendency to spall. Consequently their use was limited to the hearth of the furnace below the foreplate. (Fig. 2)


Magnesite Limited During World War I-In 1913 the steel tube, rammed full of burned magnesite. was developed and by 1915 was in general use in backwalls, endwalls and bulkheads. This marked the first practical application of basic materials above the foreplate. During the first world war, the foreign supply of magnesite was limited and it became necessary to find another source. This led to the development of the magnesite deposits in the state of Washington which today are the source of most of the magnesite used in this country. Chrome brick came into general use during this period first as a substitute for magnesite. As the physical characteristics of chrome brick improves the refractory manufacturers found general use for them in frontwalls, backwalls, endwalls and bulkheads. (Fig.

With the advent of the sloping backwall, there was a great increase in the use of basic materials. The development of the sloping backwall coincided with the development of chemically bonded magnesite brick and chrome-magnesia brick, burned and chemically bonded.

improved chrome-magnesia brick rapidly replaced silica for port corners and made it possible to maintain the desired furnace lines for a longer period of the furnace campaign, contributing to the development of faster melting speeds and increased production. The burned

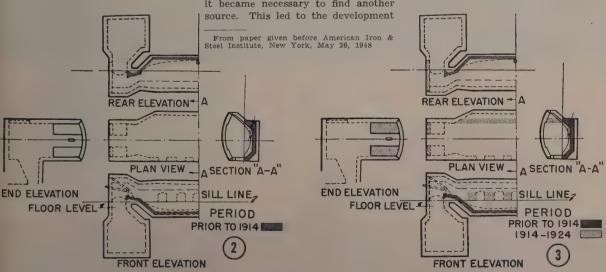

CONTINUOUS CHAIN MADE with DANLY PRESSES

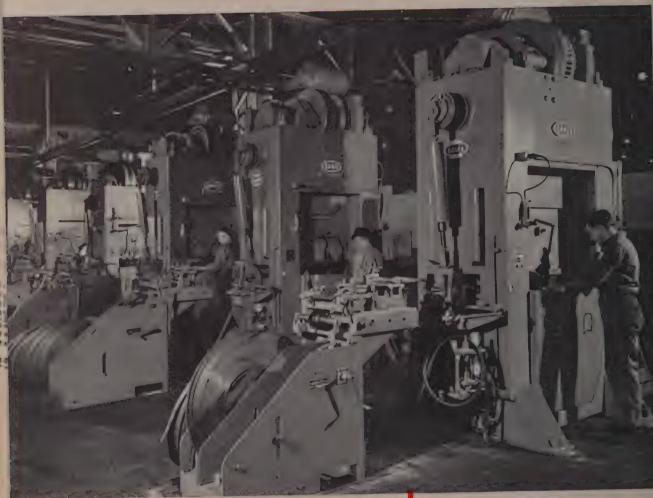

View at Chain Belt Company, Milwaukee, Wis., showing battery of Danly Two-Point 75-Ton High Production Presses equipped with automatic roll feed and chain spool producing continuous chain automatically.



per foot.

Material: S

JOB

FACTS

Press: Danly, 75-Ton Capacity.
Part Name: Steel Detachable Chain.
Job: Stamping, Forming, Complete Chain, 7.4 lin

Material: Steel Strip-.105" x 17/32".

Die Sets: Danly Standard Die Sets. Progressive Die Rate of Operation: Complete Link Per Stroke, p machine.

Auxiliary Equipment: Automatic Feed and Automatic Spool Winder for Completed Chain.





AUTOMATICALLY FROM COIL


ROLL FEED AND CHAIN SPOOL

At Chain Belt Co. continuous steel detachable chain is manufactured complete on each of these Danly presses at the rate of a link per stroke. Operations consist of blanking, piercing, forming, and assembling the chain from steel coil stock which is fed automatically.


PRESSES GIVE LONG TROUBLE-FREE SERVICE

The resulting low manufacturing cost of this high speed operation is not the only economy effected. Extra savings accrue because the presses are designed to stay on the job longer, eliminating expensive down-time. For example, the frames of Danly presses are extra-heavy, welded steel construction, which are fully stress-relieved before machining. This assures continued alignment and a minimum of bed deflection—no more than .0006" per foot of bolster width. In turn, accuracy of die alignment is maintained which gives more stampings per die grind and longer die life.

Further, long trouble-free operation is assured by the Danly automatic filtered oiling system. Clean, filtered oil is piped directly to each gear, bearing, and driving member—including the flywheel bearings.

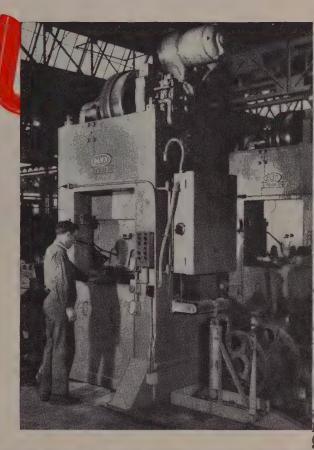

DANLY VENTILATED CLUTCH CUTS DOWN-TIME AND PRESS MAINTENANCE COSTS



The new Danly Ventilated Clutch is another exclusive feature that offers unusual advantages in reducing press down-time and maintenance costs. High velocity air ventilation eliminates over-heating. The drive shaft, gears and bearings are fully lubricated automatically. Test runs under full load show negligible disc wear after more than 8-million successive clutch engagements.

WRITE FOR MORE FACTS

Write today for more facts on the time-saving features of Danly Presses; Find out how Danly Presses can help you cut stamping costs. Ask for a complete presentation and a production estimate.

DANLY MACHINE SPECIALTIES, INC. 2100 SOUTH 52ND AVENUE, CHICAGO 50, ILLINOIS









25 YEARS OF DEPENDABLE SERVICE TO THE STAMPING INDUSTRY chrome - magnesia brick replaced chrome brick in initial frontwalls, including arches. These gave exceptionally good service, in many cases lasting for a roof campaign. The unburned chrome-magnesia brick came into general use for hot job frontwalls.

Early Use of Basic Material Proved Unsuccessful—Improved physical properties of the basic brick developed during this period were responsible for the revival of interest in basic roofs. However, early trials of basic material in open hearth roofs in the late 1920's and all through the 1930's were not successful. consisted of basic shoulders in conjunction with a sprung silica roof and small sections of sprung basic roofs. In 1935 reports were received of the successful operation of basic roofs in Germany. The following year the English operators reported basic roofs in operation. The structural design and materials used in the European basic roofs were not applicable to the furnace size and operating practices of American plants, as demonstrated by the experience of one company that tried to apply the foreign design. (Fig. 4)

Practical development of the basic roof started as a series of panel tests and eventually a complete basic main roof was constructed on an otherwise conventional silica furnace, at the Johnstown plant of Bethlehem Steel Co. These tests were conducted between 1940 and 1942 with various basic brick being used. A method of suspension similar to that used successfully in the construction of copper reverberatory furnaces was tried. These tests were not successful chiefly because furnace shutdowns for repairs to frontwalls, back-

walls and end sections were detrimental to the basic roof. However, these tests did demonstrate the practicability of the suspended construction and pointed out the necessity of complete basic ends. This series of tests was concluded in 1942. (Fig. 5)


Basic Ends Provide Economy -Shortly after the conclusion of the Johnstown tests, a roof of similar design was operated for several campaigns, both with and without basic ends, at the Ford Motor Co. basic roof was discontinued, but the basic ends were retained as economical installations. Almost coincident with the conclusion of the Johnstown tests, early tests on basic ends were started at the Steel Company of Canada in Hamilton, Ontario. In January, 1943, an experimental basic end, which was the fore-runner of all the present installations, was built on one end of a 50 ton furnace. Only the port roof and the under cut chill wall on this furnace were built with suspended construction. The balance of the walls were partly solid basic and partly veneered with basic brick. The primary purpose of this experimental installation was to obtain granular, easily removed slag.

Success of this installation led them to convert a 180 ton furnace to a basic end unit in April, 1944. In this furnace, bands of suspended wall tile were altered with conventional masonry sections throughout the uptake walls. Since that time, bands of suspended brick have been brought together progressively until only one course of brick separates the supported bands. This furnace has demonstrated in service the practicability of the suspended construction of basic ends. The advantages of the sus-

pended type of construction were recognized and the expansion of basis end furnaces has been rapid. A the present time there are 18 furnaces in operation with complet basic ends, two of which have basis main roofs. In addition, there are the basic ends on order or being in stalled.

Armco Steel Corp. is operating eight of the above furnaces, six a Middletown, one at Ashland and on at Houston. The operating experience explained here is that of the Middletown division, which installed its first basic end furnace in October 1944.

Lower Maintenance Basic End Fur naces - Cost comparisons between basic end furnaces and conventions silica end furnaces show that th basic end furnace is operated at lower repair cost per ton. The No 7 furnace (basic ends) was put int operation in October, 1944. The en tire expenditure for basic end con struction is used in the comparison chart. The No. 4 furnace (conven tional silica construction) has op erated through the same period These two furnaces were chosen s that the comparison would reflect th increased costs of labor and mate rials over the period. Fig. 1 cover a period of forty-two months of basiend furnace operations. An accumu lative repair cost of the two furnace is compared to the shop total repai cost for the same period. After 80 heats the basic end furnace wa equal in repair cost to the shop av After 1380 heats the basic end furnace repair cost was the same as the silica end furnace used fo comparison purpose. At the presen time the basic end furnace repai cost is 28 per cent under the shop

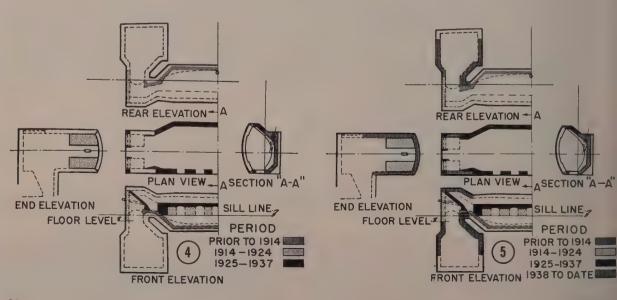

average and 11 per cent under the silica end furnace used for the comparison.

The first furnace constructed with basic ends has made 2143 heats to date (Mar. 1, 1948). The silica end furnace (No. 4 used in the above comparisons) has made 2081 heats in the same period. With all furnaces of basic end construction, we can reasonably expect a production incresse of 3 per cent or 27,000 tons per year.

Suspended Construction—This type construction has made it possible to schedule furnace repairs with a much higher degree of accuracy. As mentioned above, campaign life of a furnace is now regulated by roof life. Except for frontwall repairs we have never had to take a basic end furnace out of operation for anything but a main roof. As the main roof can be inspected daily and repairs planned accordingly, shop operations are not interrupted by unexpected shutdowns of furnaces caused by the failure of some hidden or inaccessible part of a furnace. Suspended construction has eliminated the danger of failure of furnace sections caused by difference in expansion rates between old and new silica brickwork. Such failures have happened even when great care was taken in heating the furnace after a repair. Occurrence of such failures resulted in the establishment of arbitrary repair schedules, wherein certain parts of a furnace were replaced at stated intervals, regardless of the condition of the part at the time of the repair. This practice caused longer repair periods and excessive labor and material costs. Suspended construction permits patching of individual sections, without disturbing any other section. It is now possible to get more life from each individual brick. This does away with the necessity of replacing large areas of very good brickwork due to localized weakening of supporting arches, as happens with conventional construction.

The method of brick suspension used in basic ends permits the use of a single uptake. This increase in uptake area results in a reduction of flue gas velocity, which should reduce erosion appreciably. We have had one campaign on a furnace with single uptakes and we believe this furnace will require less repair work in the uptakes than a double uptake furnace. The single uptake furnace, which does away with the division arch and burner port cooler, requires less cooling water. In a plant using a recirculating water system, this results in a considerable saving in water and fuel consumption.



STEEL HOUSES ON PILING: Housing problems for personnel engaged in offshore drilling operations of Ohio Oil Co. in Gulf of Mexico are solved by prefabricated steel quarter house and mess rooms built by Avondale Marine Ways Inc., New Orleans. The 75-ton quarter house, complete with furniture and the 33-ton mess room, also with furniture are so framed that they may be lifted at four points, making it possible to load the houses on barges for transportation and subsequent mounting on piling. Connection to fresh water and electric lines makes them ready for occupancy

The basic end furnace has less out time for repairs due to first, less repairs being necessary and second, the repair being made faster. The out time on basic end furnaces averaged 154 hours per furnace less than silica furnaces for the year 1947. This means that fewer brick-layer hours are required, which is an extremely important item at this time in our plant as well as in most steel plants.

Fuel consumption per ton of product is lower in the basic end furnaces than in the conventional silica end furnaces. This is due to a variety of reasons:

- 1—Repairs are made faster, so less fuel is required to bring furnaces back up to operating temperatures.
- 2-Less out time for repairs.
- 3—The campaign length is regulated by roof life. The slag pockets and flues are cleaned out on each repair so that the operating speed of the furnace is the same throughout each campaign.

Blasting Unnecessary — We use dynamite to remove slag from silica end furnaces. The deposit in the slag pockets of the basic end furnaces is

granular and can be removed with a shovel. As dynamiting is not necessary, one of the hazards of furnace repairing is eliminated. The deposit in the slag pockets is of such an analysis that it can be used as sinter in the blast furnace or open hearth.

The present basic end construction has made it possible to eliminate all of the silica brick except that used in the main roof and, in our case, that part of the port roof over the The elimination of this aprons. large amount of silica brick reduces the dust hazard considerably, and when basic roofs are found practical, the silicosis problem will disappear so far as the open hearth furnace is concerned. There is also a distinct advantage from the personnel standpoint. Brick masons prefer to work on basic end furnace repairs, probably because of less dust. There is constant pressure from helpers working on silica end furnaces to have their furnaces converted to basic ends. They see that the helpers on the basic end furnaces have more days' work each year and earn a higher incentive pay due to less out time for repairs.

Time consumed in removing slag

from slag pockets has been the controlling factor in the length of silica end furnace repairs. This job is completed in much less time in a basic end furnace repair, so that now removal of dust from flues and changing of checker brick is the time consuming element of the repair. This has focused more attention on improvement in mechanical methods for flue dust removal. Considerable progress has been made in this respect, but much more improvement is needed, so that the full benefit may be derived from the all basic furnace of the near future.

The development of the all basic furnace is now in progress. Steel

Company of Canada, after making the early tests with basic ends, has carried on with development of the basic roof. The tests culminated in the trial of an all basic furnace starting in February, 1945. The construction used in the roof of this furnace was modified from the earlier Johnstown trials to cut down the amount of corbelling on the roof face. To date this furnace has had 4 basic main roofs, the present roof giving indications that it will run considerably beyond the point where it will break even in cost with silica roof.

The all basic furnace of the Carnegie-Illinois Steel Corp., at South Chicago, is constructed similar to

the Steel Company of Canada furnace. This furnace is operating on varied practices such as increased fuel rates, oxygen in combustion, etc., so that furnace life cannot be compared to a furnace operating under normal conditions. No cost data on the operation of this furnace have been published but performance to date, under extremely severe operating conditions, has demonstrated that the completely basic furnace is practical and economical.

Construction technique of basic ends and roofs has improved rapidly. The first basic ends permitted excessive air infiltration in the early stages of a furnace campaign. This condition has been improved by replacing the combustible expansion spacers with a corrugated metal plate. The outer two corrugations are filled with a suitable packing material, and the inner trowelled with chrome cement. This method of construction provides ample room for expansion, and has greatly reduced air infiltration. Early basic port roofs were built with vertically hung tile, the arched contour being obtained by corbelling. The exposed edges of the brick failed in the early stages of the campaign, caused mainly by transverse stresses. The development of the radially suspended roof provides a smooth surface inner roof contour. Service tests indicate an increased life of port roof section.

Development of Open Hearths -It is interesting to note the interrelation of the several factors that have contributed to the present state of development of open hearth furnaces. Steel clad magnesite brought basic materials up out of the hearth, and started their use in exposed loca-The sloping backwall gave further impetus to the use of basic materials above the foreplate. These two structural improvements resulted in improved basic brick, which permitted the use of this brick in maintaining furnace lines. This has resulted in better operating conditions; and has promoted the use of higher flame temperatures. This in turn put the responsibility back on the structural engineers to find practical methods of using the better physical properties of the basic brick.

It is reasonable to expect further improvements in materials and construction methods, which, if they evolve as rapidly as in the past six years, will result in a completely basic furnace that will show tremendous improvement in production rates, operating costs and, with higher temperatures attainable, in improved quality.

Water Cooling ...

Speeds charge of plant truck batteries

FACED with round-the-clock need for industrial trucks, engineers of Reynolds Alloy Co., Listerhill, Ala., devised a unique system for water cooling storage batteries while on charge. Cooling action allows faster charging, thus keeping trucks in operation for three shifts on only two sets of batteries per truck. The system also prolongs the life of the batteries by preventing excessive temperatures usually developed under accelerated charging.

Charging racks are in the form of long concrete pits, with individual spray pipes containing cool well water installed under each charging position. Batteries taken directly from trucks and placed over the pits receive the immediate cooling effects of the spray.

The charging station, which keeps 54 batteries at high operating efficiency, also features a combination air-water nozzle which effectively washes and dries battery tops, and a paint vat into which the batteries are dipped for repainting.



High-speed cut-off shears pace production in continuous forging operations DRIVE EFFICIENCY results from outboard support of all shafts, and use of Timken bearings on high-speed shafts. UNERLOAD CAPACITY resulting from heavy cast steel frame.

Designed to prevent lags in the cut-off operation in modern high-speed forging practice, Mackintosh-Hemphill Shears embody the essential features for maintaining continuous production cycles.

RAPID KNIFE CHANGES AND ADJUSTMENT facilitated by open-

throat construction.

Manufactured in six sizes, with capacities ranging from 150 to 1250 tons, Mackintosh-Hemphill Shears can be operator-regulated to conform to the cut-off requirements of automotive and industrial forge shops, and cropping and dividing operations in continuous bar and billet mills.

The high production rate and all-'round flexibility of Mackintosh-Hemphill Shears result from these important advantages—

(a) Overload Capacity (b) Drive Efficiency (c) Integral Power (d) Rapid Knife Changes and Adjustment (e) Positive Lubrication Whenever cut-off operations must be geared to highspeed forge shop or continuous bar mill practice you'll find that Mackintosh-Hemphill Shears can set the production pace.

POSITIVE LUBRICATION with automatic pressure system for bearings, and gearing in enclosed oil-

tite case.

MACKINTOSH-HEMPHILL CO.

PITTSBURGH AND MIDLAND, PA.

Makers of the Rolls with the Red Wabblers

OTHER MACKINTOSH-HEMPHILL PRODUCTS INCLUDE: ROLLS...
STEEL AND SPECIAL ALLOY CASTINGS... COMPLETELY INTEGRATED
STRIP MILLS...HEAVY DUTY ENGINE LATHES...THE NEW MACKINTOSHABRAMSEN STRAIGHTENERS...IMPROVED JOHNSTON PATENTED
CORRUGATED CINDER POTS AND SLAG HANDLING EQUIPMENT...
SHAPE STRAIGHTENERS...SHEARS...LEVELLERS.

November 22, 1948 99



became available, and as new alloys and improved techniques opened the way for refinements in aircraft design that pointed toward greatly increased performance, the propeller was called upon to fulfill tasks un-

Today the aircraft propeller constitutes an outstanding contribution to aeronautical engineering in performing numerous functions essential to the safe and efficient operation

known to its prototype.

Welding and

Heating

. . . important factors in fabrication of hollow steel aircraft propellers

> By ARTHUR Q. SMITH American Gas Association New York

of modern airplanes. Efficiency con siderations require that the blade angles of a propeller be controllable during flight. Modern aircraft per formance depends on propeller ver satility.

Blades must be adjustable over a wide range of angles to meet al operating conditions. High pitch settings afford increased speed, sub stratosphere altitudes and effective diving. The positive setting of ap proximately 90 degrees used for feathering and the negative setting (reverse thrust) used for handling large flying boats on the water, in dicate the desirability of an extensive

Weight is an important factor in propeller design, as in aviation gen

WHEN an airplane is being tuned up for a flight, adjustments of many kinds can be made on the engines, controls and other mechanical or electrical devices so that everything will be in proper and safe operating condition. Not so with the propeller blades. They must be perfect, and anything short of perfection means immediate replacement with a new one. Therefore, blades must be perfect when they leave the factory.

Curtiss-Wright Corp., Propeller Division, Caldwell, N. J., manufactures hollow steel blades for all types of airplanes. Their production processes are as nearly perfect as it is humanly possible to make them.

In the early days of flying, aircraft performance was limited, requiring of the propeller only its elemental function-the conversion of engine torque into thrust. As engines with vastly increased power

Fig. 1-After being formed, blades are annealed in gas-fired pit type furnaces for 12 hours at 1200° F. On completion of annealing cycle, furnace is shut off and the charge allowed to cool slowly in a closed furnace with the prepared atmosphere still maintained

Fig. 2-First operation in manufacturing a hollow steel aircraft propeller blade is rough milling on rolled steel plate



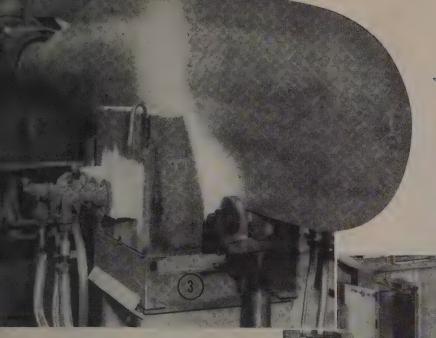


Fig. 3—Gas-fired radiant cup burners on each side of the blade effect the braze at 1960° F. An atmosphere is maintained inside the blade during the brazing operation

Fig. 4 — Chrome finish on blades and rubber linings are processed in this gas-fired externally-heated convection oven

erally. Untiring research with hollow blade designs and new materials has yielded propellers incorporating economy of weight as well as the strength for high power output applications.

Erosion resulting from abrasion shortens a propeller blade's service life. Blade material, therefore, must be sufficiently hard to resist the abrasive action incurred when fast-revolving blades come in contact with stones and gravel on airports and with water spray during flying boat operation.

The Curtiss-Wright hollow steel blade is made by welding together two formed sheets of alloy steel. Rolled steel plates SAE 4320 and SAE 4330 are used.

In the case of larger blades, rolled steel plates have a center rib while those for smaller blades do not. Shank and camber face are formed from one sheet, and the thrust face from another. First operation is rough milling of the plates, the largest ones weighing in the neighborhood of 750 pounds, to a certain thickness which is further reduced by grinding. Thickness is varied throughout the entire length of the blade according to design specifications. Blades are then blanked in large presses and cold-formed dies.

Heat Treating—Heat treating in various forms is used throughout the manufacture of blades. First operation after blanking and forming is annealing in gas-fired pit type radiant tube muffle subcritical furnaces under full automatic temperature control. Fired with premixed gas, several blades are lowered into a furnace at one time and annealed at 1200° F for 12 hours, at temperature.

The furnace is charged with a prepared atmosphere consisting of 6 per cent CO₂; zero illuminants; zero O₂; 17.2 per cent CO; 10.6 per cent H₂; 0.4 per cent CH₄; balance N₂. Dewpoint -15° C. When the annealing cycle is completed, the furnace is shut off and the charge allowed to cool slowly in the still closed furnace, with the atmosphere maintained until blades are removed.

Blade halves are welded together in automatic machines by the atomic hydrogen welding process which gives high-strength and uniform weld. This weld is along the leading and trailing edges in a seam that converges at the shank and extends to the root end of the blade.

After every operation a careful inspection is made and several times during a blade's manufacture complete x-ray photographs are made of the entire blade. As many as ten to twelve 13 x 17-inch negatives are needed to cover one blade. Nothing is left to chance; each operation must be perfect. If any defect cannot be remedied, blade is scrapped.

To reinforce the welded edges of

the blades and to provide a sort of "cushion", a copper-manganese fillet is brazed to the steel on the inside. Special instruments are used to deposit a proper amount of copper manganese granules along the inside of the blade. It is then put into an automatic machine which feeds the blade edge between two groups of gas-fired radiant burners. At a temperature of 1960° F, maintained by automatic temperature control equipment, the brazing is effected. A prepared atmosphere is introduced inside the blade during the brazing and consists of: Zero CO,; zero O,; 0.3 per cent illuminants; 12 per cent CO; 10.5 per cent H2; 0.4 per cent CH,; balance No. Dewpoint -60° C. First one edge has the fillet brazed, then the other edge, followed by a rigid inspection. From time to time random samples of work are taken to the metallurgical laboratory for thorough check.

To complete the blades, considerable hand grinding must be done to attain the exact contours and thicknesses. Blades must be balanced exactly, and grinding operations are

November 22, 1948

utilized to remove a little metal here and a little there to attain this balance. An electronic device is used to check the blade's metal thickness. It is a sonic measuring device, the Reflectogage, which indicates thickness on an illuminated graph. The blade material must be within prescribed tolerances and varies from 0.282-inch at the widest part of the blade to a 0.063-inch at the top.

Blades are hardened in rotary pit furnaces in a prepared atmosphere to secure the desired hardness of rockwell C of from 27 to 33. Atmosphere entering these furnaces is: 1.8 per cent CO₂; 0.6 per cent illuminants; zero O₂; 25.5 per cent CO; 23.8 per cent H₂; 0.4 per cent CH₄; balance N₂.


Other hardening operations are performed on the many gears which go to make up the hub assembly of the mechanism to control the variable pitch of the propeller blades. For this heat treating operation, gas-fired radiant tube chain belt furnaces under automatic temperature control are used with the following prepared atmosphere: 5.5 per cent ${\rm CO}_2$; 1.5 per cent illuminants; zero ${\rm O}_2$; 20 per cent ${\rm CO}_1$; 18 per cent ${\rm H}_2$; 6.5 per cent ${\rm CH}_4$; balance ${\rm N}_2$. Atmosphere ratio to raw gas is 5:1. Temperatures in these furnaces range from 1460° F to 1620° F at from $\frac{1}{2}$ to 5-hour cycles depending on the depth of case required for the particular gears being hardened. Full automatic controls keep temperatures within prescribed limits.

Use of prepared atmospheres for the several heat treating operations described above, with a different atmosphere for each, runs into a considerable volume of gas. All these special gases are prepared at one central point and piped to the respective furnaces around the plant. Atmosphere generating equipment consists of a Westinghouse Mono gas generator, Electric Furnace Co. endothermic generators, and a Kemp atmosphere generator. Located in a

separate enclosure and under the supervision of an engineer, the accurate composition of the prepared atmospheres is under constant control

One of the final tests on blades is the Magnaflux test which shows up any defects in the steel proper or welds. The operation consists of flowing a mixture of fine iron filings and kerosene over a blade and periodically sending a magnetic field through the blade. Defects show up in a pattern of the iron filings where the magnetic field is interrupted by such a defect.

Last operation on blades is chrome plating. This finish is baked on in an externally air heated vertical convection oven, the input rating of which is 1 million Btu. Blades are hung from an overhead track and the chrome finish is baked on at 520° F for 4 hours and 15 minutes. In some blades a vulcanized rubber rib is inserted on the inside of the blades. Vulcanizing is done in the same oven at 200° F for 3½ hours.

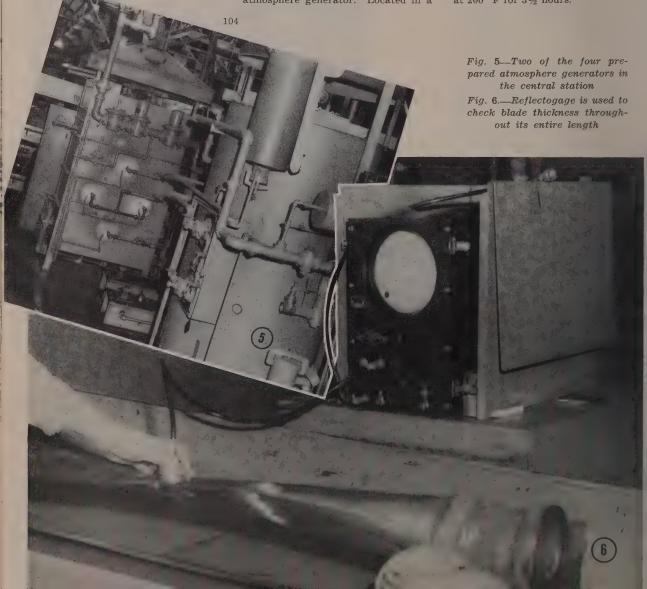

MIXER BOWL

(WIDTH-20" I. D. DEPTH-18")

SPUN FROM ONE PIECE OF STAINLESS STEEL!

Marvels of fabrication such as this are every day occurrences at CRAFT

> Do you have any especially difficult or "tricky" requirement? Let us show you how perfectly we can fill your need.

We specialize in stainless steel spinning, in fact; ANY spinning job to ANY specification, IN ANY METAL.



MIXER BOWL COMPLETE WITH FIXTURES

as in mixer bowls, steam jacket kettles and dairy equipment, no can equal single piece spinning.

Where sanitation is paramount— metal can compare with stainless steel, no method of fabrication

WRITE FOR DESCRIPTIVE CIRCULAR OF FACILITIES AND PRICES



ANNEALING PICKLING POLISHING

LETTERS to the Editors...

AND DESCRIPTION OF THE PROPERTY OF THE PROPERT

Get Your Reprints

We would greatly appreciate your sending us tear sheets of "Cutting Tool and Die Materials" feature sections published in your issues of August 16, 23, 30, September 6, 13, 27 and October 4. Congratulations on a job very well done which needed doing for a long time.

C. S. Bushnell, Chief Engineer General Railway Signal Co. Rochester, N. Y.

Reprints of the Guide to Cutting Tool and Die Materials are available for \$1.00 from STEEL's Readers Service Department — The Editors

Address Dept.

In the August 23 issue of STEEL there appeared on page 110 a short article dealing with a process for the impregnation of steel and iron with pure aluminum by Linden & Co., Los Angeles, Calif.

Since we are very much interested in obtaining more information concerning this process and the products resulting from it, we would greatly appreciate it if you could supply us with the complete address of this concern.

> Clifford L. Sayre Special Projects Dept. Buffalo Electro-Chemical Co. Inc. Buffalo, N. Y.

Complete address of Linden & Co. is 901 North Westbourne Drive, Los Angeles 46, Calif.—The Editors

First Hand Report: European Steel Situation

I have just returned from a business trip to Europe and consequently have not yet caught up with all of the accumulated reading matter that my secretary thought I might be interested in upon my return. However, I have read your editorial in Steel entitled "Tight Period Ahead". One of the points you make in this editorial is regarding the possibility of using foreign tonnage for Marshall Plan steel. You stated, "As iron and steel output abroad improves, it may be possible to substitute some foreign tonnage for Marshall Plan steel from the United States or even to increase the trickle of ferrous materials now coming to our shores from dollar-needful European nations".

There are many things that I was astounded to find in my travels through France, Switzerland, England, Belgium and Holland. But the

most astounding was the fact that every steel plant that I visited is ready to produce at 100 per cent capacity. Furthermore, I visited steel plants that are actually producing at 100 per cent capacity, as for example a French plant northwest of Paris. This is a 1000-ton-per-day plant. However in going through this plant one of the things that struck me was the exceedingly large percentage of their material that was going out in the shape of bent wide flange channel. I asked them what they were used for and I was told that this item was one of their largest tonnage items and that it is used entirely in coal mines as mine

In other words, while we in this country for the most part have been using wood pit props or, as I understand it, in some cases concrete construction is used, the French use steel throughout the operation. Furthermore, my observation, driving from Montbard in the southeast to Valenciennes to the northwest, is that there is a tremendous amount of standing timber available in France if it were only used. Naturally much of this is in their national public parks, but if there is a national emergency there certainly is no reason why some of it should not be used to help out in the national emergency.

Steel plants in Switzerland also are producing at 100 per cent capacity. One of these plants I visited. because they had purchased five of our machines, has expanded so that they can produce twice the tonnage of cold finished steel. This is a completely integrated producer in the sense that they produce all their steel products from raw material in the shape of scrap. They do their own melting, rolling, and so on. The director general of this plant told me that he was very much worried about where they would sell the output of their new plant now that they have it built and in operation. They are particularly worried because they cannot sell in those areas where they formerly exported steel-namely to France, Holland, Italy, Spain, and

I told them I coudn't understand this because the New York Herald-Tribune had just published the statement that we have exported some, as I recall it, 228,000 tons of steel to Sweden. I knew that we did not like to do this and therefore why didn't the Swiss sell steel to Sweden. The answer I got was that Sweden never has been an importing country as far as steel is concerned and that every pound of steel that the United

States furnished to Sweden really passed right on to Russia. There was so much consternation about this article that the director general asked me to let him copy it so that he could take it up with his board of directors.

The most astounding discovery l made was in Belgium. I went to visit one of our customers there to see a Medart bar straightening machine in operation. They took me all through their plant. They do not produce the steel they use_in other words they purchase all of their raw material in the form of hot rolled bars and other shapes. They forge track spikes, plates, track bolts, and they manufacture all types of threaded bolts and so on. They also have a tremendous cold finishing department. As a matter of fact this is their largest operation. It is a plant as large as the largest cold finish ing plant in the United States. Ir going from one of the bolt depart ments into the cold finishing plant we passed through their bar storage building.

When I got into this building : exclaimed that I never had been in the presence of so much steel since before the war. This did not bring any remark from anyone so I re peated it, and then my friend asked me if I was really complimenting him. I explained I really meant what I said, that I hadn't seen so much steel in one place since before the war. He then replied by saying that they did not consider it any more than a bare necessity because it was only a 90 days' supply to operate their plant at full capacity. I told him if I could get enough pig iron or enough steel bars into my plan to operate 10 days in advance at al times, I felt fairly good-that I had been required to shut down our gray iron foundry twice during '48 be cause we had no pig iron. I then went into their cold finishing depart ment and I was astounded again be cause here was a collection of stee that amounted to one-half of the to tal tonnage in their raw materia stock. In other words they had 4 days' production in finished goods and 90 days' raw material on hand Where, then, is there such a dire need for steel on the European con tinent?

The payoff really came that eve ning when I was the guest of the chairman of the board of directors o this plant. I told him that I had been exceedingly interested in his whole plant and that he really had a very fine layout. This is a fact, although some of the operations are rathe old. Nevertheless they were produc ing and are in a position to increas production without buying a single piece of equipment. I also compli mented him on having such a fin stock of raw material and finished goods on hand. He immediately mad the statement that he and his asso

How TIMKEN® forging bars help you cut production costs ... improve your forgings too





BECAUSE Timken® forging bars have uniformly high quality, they offer you two important advantages.

First, lower production costs through fewer delays, fewer rejects and fewer changes in shop practices. Second, consistent quality and assured performance in your finished forgings.

From each shipment of Timken forging bars you use, you can depend on the same chemical composition and response to heat treatment, the same forgeability and the same physical properties—from bar to bar and from heat to heat.

This outstanding uniformity is a result of: 1. Complete quality control by the most precise methods known, 2. Specialized manufacturing skill, 3. Long time leadership in alloy steel research, and 4. Special practices which are practical only in a large, flexible specialty mill.

For an "on-the-job" analysis of your steel problem, made by our Technical Staff, write us today. No obligation. Ask also for our booklet, "Evaluating the Forgeability of Steels", with data on 97 analyses. The Timken Roller Bearing Company, Steel and Tube Division, Canton 6, Ohio. Cable address: "TIMROSCO".





ciates were very much concerned about the outlook of the future because they were only exporting 50 per cent of the amount they were exporting before the war. Naturally I took advantage of the situation and said to him that I knew there were plenty of places in the world where he could export and sell all his stock on hand, if he wished to do so, and immediately named South America as a big area, and I said certain parts of Canada would buy his goods, and many other parts of the world. He replied that the difficulty with all of these markets I mentioned was that they did not have any money, meaning of course that the would-be purchaser could not get the exchange they required and he stated in the same breath that they would not sell on credit.

I did not get into any steel plants in England because my plans were interrupted. I was scheduled to go to Sheffield and visit a steel plant there. However, I did visit scrap yards in England and therefore I know that there is no shortage of raw material as far as these scrap yards are concerned. All of them were well filled. Furthermore, the port of Southampton has many tons of scrap in the shape of submerged and partially submerged vessels.

I got into Germany and I went to meet those government officials of ours and those "Members of Investigating Scrap Missions" that went to Germany and have them tell me that the scrap there is not readily available. I went by rail from Basel to Frankfurt and I saw a carload of scrap for every mile of railroad, lying all within sight of the railroad line. There is so much scrap that the roads must be detoured around some of it. Furthermore, every large rail terminal, such as Leipzig and so on, wherever there are sidings, is filled with locomotives, most of which are only scrap, broken down railroad cars, and so on and so on, that were assembled at these points. Naturally all of this is in the American Zone. I did not go into the British Zone although I passed through the French Zone. The French Zone is very similar to the American Zone in this re-

The man on the street in Switzerland asked me, "What is wrong with you Americans that you insist on giving all of your goods away?" After a person spends two weeks in Switzerland he has a great respect for their opinion and I agree there is something wrong with we Americans when we insist on giving our goods away to the people I visited.

Walter Siegerist, President The Medart Co. St. Louis, Mo.

P.S.—One of the Swiss brass mills let me see their scrap pile in order to show me the U. S. brass artillery shell cases they bought in the Phillipines. W.S.



Half of this message has to do with NORTHWEST products and processes for chemically cleaning ferrous and nonferrous metals preparatory to plating, vitreous enameling, painting, etc., each problem involving a specific programing of one or more of the thirty-five standard NORTHWEST Cleaning Compounds including Electrolytic, Immersion, Solvent, Spray, and Water Wash types . . . the "Lo-Hi" pH process of chemically cleaning metals, preparatory to plating, porcelain enameling, etc., makes practical a control that management can plan on in these departments regardless of the type of metal or soil . . .



is concerned with metal forming lubricants developed for ferrous and non-ferrous metals in both pigmented and nonpigmented form ... SUPERDRAW products are specifically compounded for: 1. Brass and Brass Alloys, 2. Cold Rolled Steel, Enameling Iron, Stainless Steel and Aluminum, 3. Alloys of Steel, Aluminum and Copper ... SUPERDRAW compounds will handle light, medium, and heavy operations . . . may be applied by brush, roller, spray, or dipping . . . A request on your letterhead will bring a technician to consult you on your drawing and cleaning problems . . .



Forging Practice

(Concluded from Page 71)

than do forgings after they have been hardened and tempered. The cutting tools do not dull or wear out so fast, which allows more pieces to be machined between tool grindings. The production rate on normalized or annealed parts is usually higher. Disadvantages in heat treating parts after machining, by hardening and tempering is the possibility of warpage, of slight size changes and chances of a scaled surface. In some

cases, a grinding follows the heat treatment to correct any irregularities caused by the heat treatment.

In general, it may be said that a heat treatment by hardening and tempering can follow the machining operations where the forging is of a chunky nature that is not readily warped by a heat treating operation, where the assembly tolerances are not very close, where a discolored or slightly scaled surface is not of importance, where the final hardness is quite high, over 300 BHN, or where a grinding operation follows the heat

treatment. Shape of the part and the machining involved must be given due consideration.

Warpage Eliminated—Forgings machined in the hardened and tempered state retain the sizes and tolerances given to them by the machining operations. Chances of warpage, size changes, scaled or discolored surfaces, damage to fine machine work such as close tolerance threads, and ragged surfaces due to softness are eliminated by machining after heat treatment. There is a lesser tendency towards cracking on unmachined forgings because the unmachined forgings usually do not have the sharp corners obtained in machined parts.

Where parts are cracked in the unmachined condition, they do not lose expensive machine work. Long parts are usually straightened more easily in the unmachined condition than in the machined condition because straightening marks do not spoil the unmachined part so easily. Machining operations are always slower on hardened and tempered forgings, particularly in the higher hardnesses, and it is necessary to use modern heavy duty equipment which has the necessary rigidity to perform the machining operations satisfactorily. Tool dressings are more frequent in machining hardened and tempered parts, but modern carbide-tipped tools have helped in machining heat-treated parts.

Experience of many kinds of machining operations on a large variety of forgings seems to indicate that it is not possible to offer a general rule to be followed. Some parts are machined more satisfactorily in the tempered state and then hardened and tempered, considering overall economy. Many other forgings should be heat treated first and then machined to obtain the most satisfactory results. Shape of the part grade or composition of material used, scope of the machining requirements, type of machining equipment available, hardness at which the machining is to be performed, quantity of parts to be machined, type of cutting tools to be used, design of the holding fixtures, tolerances required and experience of the personnel are some of the factors that enter in sequence of the machining operations and in specifying machining in the soft or heat treated state.

(To be concluded)

Tournalayer Division, Longview, Tex., of R. G. Tourneau Inc., has introduced a 45,000-pound (gross vehicle weight) vehicle designed to haullong, heavy loads such as pipe both in on-road and off-road operations.


Transfer Technique

Cuts Construction Cost

ASSIGNMENT of a battery-powered high-lift platform truck to an additional operation for a period of approximately 2 hours per month saved an estimated \$10,000 in construction costs when a new department was set up in the Etna, Pa., Works, Spang-Chalfant Division of National Supply Co. Originally it was planned to extend the runway of an overhead crane in order to transport incoming coupling pipe stock to storage, but engineers found a simple way of saving both the time and expense of construction.

One end of a 30-foot transfer track was run into the yard area and the other under the craneway inside the building. A locomotive yard crane lifts 2-ton sling loads of pipe from gondola cars to the transfer car parked on track. Load is pulled inside the building by the battery powered truck, as shown in the accompanying illustration.

Overhead crane picks up the sling load and moves pipe to proper storage area and the transfer car is pushed outside by the truck for another load. Elapsed time for transfer of about 50 tons of pipe is approximately 2 hours. Supplies are received about once a month. Photo courtesy Electric Industrial Truck Association.

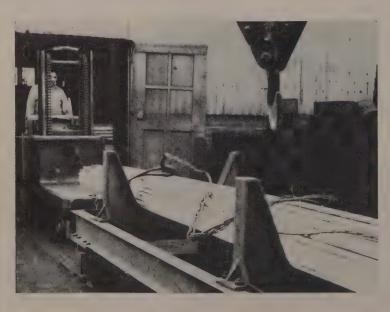

owder Metallurgy

(Continued from Page 80)

re uniformity, certain closely interelated variables in powders must be refully controlled. Among these are parent density, screen analysis, empressibility, flow rate, chemical nalysis, particle shape and structure. ests for these properties are gradally becoming standardized by the etal Powder Association.*

Uniform particle size is a prime quisite. Manufacturers ecify this in broad terms such as .00 per cent through 100 mesh", "50 per cent through 325". Metal wder is classified between shot particles of metal closer than 10 esh**) and colloids (with particles sually less than 0.1-micron). Since wder metallurgy is concerned with rface phenomena, powders larger an 100 mesh have no particular due in the process except in the anufacture of porous filters.

Particle size distribution is a nuerical frequency or weight percente in which every size of particle ists. For metal powders finer than mesh (diameter 2000 microns) and arser than 325 mesh (diameter 44 icrons) particle size distribution can determined by passing the sample rough a succession of testing sieves increasing mesh number.

Other methods of determining parele size and the size distribution e: Microscopic count of particle ameters of about 0.3 micron and wer; sedimentation and elutriation 00 to 5 microns, usually); sedimention balance; pipette, hydrometer, anometer and turbidimetric meths, x-ray diffraction.

Application of the electron microope to the determination of particle e makes it possible to measure parles from 5 millimicrons to 1 mion.

One example of laboratory instruents based on Stokes' Law*** is e Roller air analyzer. This equipent provides a means of obtaining propriate air velocities and overming agglomerating tendency of e powders. Air is passed through over the powder sample at the tling velocity of the coarsest par-

Following standards of the Metal Powder sociation are available;

P.A. Standard 1-45 — Method for Sampling Finished Lots of Metal Powders.


P.A. Standard 2-45 — Method for Determination of Hydrogen Loss of Iron Powder.

P.A. Standard 3-45 — Method for Determination of Flow Rate of Metal Powders.

P.A. Standard 4-45 — Method for Determination of Apparent Density of Metal Powders.

P.A. Standard 5-46T — Tentative Method for Sieve Analysis of Granular Metal Powders.

Particle is fine enough to pass a sieve h ten openings in a lineal inch of warp or of.

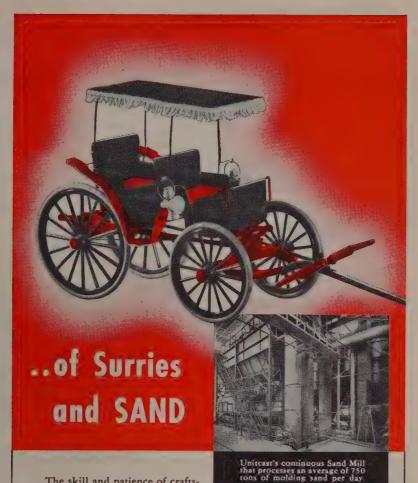

The skill and patience of craftsmen that execute miniatures often compares but never attains the degree of detail . . . comprehensive detail that is required of the craftsmen who mold dependable steel castings.

For example, at Unitcast, operation of the "Sand Control" system is just one of many comprehensive details that only reflects in the quality of the product. During each operating hour, constant vigilance and continual testing is necessary to control the many, many elements that mix good molding sand. Such items as moisture, permeability and the like must be held within definite limitations to produce Unitcastings efficiently. Differences in design between incoming and outgoing jobs on the molding line upset the immediate standards and the unusual jobs require special mixtures.

et, it's all in the day's work. With Unitcastings, like model making, painstaking time and patience have established long records of proven standards that assure Unitcast's customers the benesit of efficient casting pro-cedure. Take advantage of Unitcast's proven experience... for your next job specify Unit-castings! Unitcast Corporation, Steel Casting Division, Toledo 9, Ohio.

CANADIAN UNITCAST STEEL, LTD. Sherbrooke, Quebec

> 30 YEARS OF UNITCASTINGS

Send for our free folder

PRODUCTS LAST LONGER • BUILT WITH STRONGER UNITCASTINGS

UNITCAST

Corporation RIC STEEL CASE

vember 22, 1948

ticle in the finest fraction to be obtained. All particles finer than the arbitrarily selected coarse limit of the fraction are floated out and collected. Velocity of the air is then increased to the velocity of the coarsest particle desired in the next fraction and so on.

A few of the particle shapes encountered in powder metallurgy are shown in some of the accompanying illustrations. Method of manufacture generally determines the shape of metal powder particles. Aluminum powder made by granulation is different from that produced by stamping. Reduced copper powder is different than electrolytically deposited powders of the same metal.

Production of Powders — Metal powders, raw material of the industry, possessing their own peculiar density, shape and size distribution are produced by many different methods, both mechanical and chemical. Very fine powders can be made by reducing metallic oxides of iron, cobalt, copper, nickel, tungsten and molybdenum in hydrogen or other reducing atmospheres. This pulverization method is the commonest used, with excellent and consistent results. By controlling the reduction conditions, a variation in particle size can be obtained.

Some metals, such as titanium, tantalum, zirconium and vanadium form hydrides of 300 mesh or finer which can be used directly as powder additions, or gradually decomposed by heating in a vacuum or nonoxidizing atmosphere above 350° C to form metal powder and hydrogen. Hydride powders (group IV of the periodic table) are prepared by mixing the metal oxide with calcium hydride, charged into a special hydrogen furnace and heated to 600 to 1000° C. At the end of the heating cycle, the charge is cooled to room temperature and then broken up in jaw crusher to small lumps. This facilitates subsequent dilute acid treatment to remove the lime. Product of the reaction is fine powder-1 to 5 microns. Since it combines with and removes all traces of oxide, nascent hydrogen, released during sintering has been found to have a beneficial effect upon the

*** Stokes' Law, which relates the terminal velocity of fall of a spherical particle to its diameter, is as follows:

 $V = \frac{10^{-8} \text{ g P d}^2}{-10^{-8} \text{ g P d}^2}$

 $V \equiv$ terminal velocity of fall in cm/sec in a stationary fluid g = constant of gravitation in cgs units = 980

 $P \equiv$ density of particle in g/c.c. n = Viscosity of fluid in egs units \equiv 1.82 x 10-4 for air

Diameter of sphere in microns" $V = \frac{10^{-8} \times 980 \times P \times d^2}{}$

18 x 1.82 x 10-4 $V = .00299 P d^2 cm/sec.$

TENTATIVE LIST OF CURRENT PRICES OF SOME METAL POWDERS

Metal	Per Lb.
Aluminum	28e to 35e
Aluminum Alloys	33c to 42c
Brass	26 ½ c to 36 ½ c
Chromium	\$1.51 to \$2.26
iron	11c to 90c
Manganese	70c to \$1.00
Molybdenum	\$6.50 to \$9.00
Nickel	59c to 83c
Stainless Steel	\$.75 to \$1.35
Tin	\$1.29 to \$1.64
Titanium	\$10.00 to \$12.00
Tungsten	\$3.25 to \$7.50
Zinc	31½c to 41½c
Zirconium	\$10.00 to \$12.00
Courtesy Charles Hardy	Inc., New York.

boundary phases of the finished part.

By electrolytic processes, iron, copper, silver, tantalum and manganese powders, dendritic in shape, and of very high purity, can be produced. Iron and copper are particularly adaptable to the electrolysis process in which the metal is deposited at the cathode, either as a thin sheet which is subsequently ground to powder, or directly as a powdery crystalline deposit. Final step in this procedure is washing and drying. Electrolytes usually consist of a sulphate with or without chloride.

Atomization is one of the cheapest methods used to produce fine particles of lower melting point metals, brass, aluminum, tin, zinc, lead and solder and copper-lead. Most simple atomizing setup consists of a crucible from which the molten metal is poured, through a nozzle, to be disintegrated by high pressure air, steam or water. By changing fall in pressure of the atomizing stream, temperatures of metal and orifice dies, size and shape of the particle can be controlled. Atomized powders are always irregularly shaped, fairly uniform in size and possess good density.

Hard, brittle metals and even malleable metals can be pulverized by crushing or milling. Special equipment for this purpose includes ball, stamp, eddy, and impact mills and disk crushers. Materials such as antimony, silicon and bismuth, and hard metals, chromium, molybdenum and manganese are milled easily; copper, aluminum and brass require the addition of lubricants to keep particles from sticking to each other. Flaky powders are more generally useful as pigments than in powder metallurgy processes.

Nickel and iron particularly, and several other metals, readily combine with carbon monoxide to form metallic carbonyls which can be converted readily into powder. small, spherical particles are very pure chemically. Powders produced by this method sinter at very low temperatures; in fact, sintering is reported to occur even without the aid of compression.

ACKNOWLEDGEMENT

Co-operation of the following companies in providing data for this article is gratefull acknowledged: American Steel Foundries, Elmes Engineerin Works, Chicago Antara Products Division, General Aniline Film Corp., New York Baldwin Locomotive Works, Eddystone Divi sion, Eddystone, Pa. E. W. Bliss Co., Detroit Buel Metals Co., Painesville, O. Callite Tungsten Corp., Union City, N. J. Fred S. Carver Inc., New York
The Drever Co., Philadelphia The Electric Furnace Co., Salem, O. General Electric Co., Schenectady, N. Y. Handy & Harman, New York Charles Hardy Inc., New York Hydraulic Press Mfg. Co., Mount Gilead, O. Hydropress Inc., New York International Nickel Co. Inc., New York Kux Machine Co., Chicago Lake Erie Engineering Corp., Buffalo Metals Disintegrating Co. Inc., Elizabeth (B) Metal Hydrides Inc., Beverly, Mass. Metals Refining Co., Division of Glidden Co. Hammond, Ind. National Engineering Co., Chicago W. S. Rockwell Co., Fairfield, Conn. Sintercast Corp. of America, New York Standard Machinery Co., Providence, R. I. F. J. Stokes Machine Co., Philadelphia United States Metals Refining Co. subsidiar of American Metal Co. Ltd., Carteret, N. & Watson-Stillman Co., Roselle, N. J. Westinghouse Electric Corp., Pittsburgh

BIBLIOGRAPHY

Ornan B. Smart, "Powder Metallurgy", P. 81841. Office of Technical Services, Department of Commerce, Washington, D. C. Irving J. Donahue, "Some Considerations in Designing Parts for Powder Metallurgy", Metallurgy", Metallurgy of Metallurgy chanical Engineering, Nov., 1946, p. 949 Paul Schwarzkopf, Powder Metallurgy, Physics and Production, The MacMillan Co New York, 1947 Laurence Delisle and Aaron Finger, "Nicke iron Alloys Produced by Powder Metallurgy' Technical Publication No. 2046, American In stitute of Mining and Metallurgical Engineer Norbert K. Koebel, "Sintering Atmosphere Used in Powder Metallurgy", Fourth Annua Spring Meeting, Metal Powder Association Spring Meeting, Metal Powder Association April 15, 1948
W. Wirt Young, "Sintering of Powdered Metals", Information Letter No. 21, Metals Committee, American Gas Association, New Yor Henry H. Hausner, "Metal-Ceramics, A Ne Field in Powder Metallurgy", fourth annumenting, meeting, Metal Powder Association spring meeting, April 15, 1948 B. T. DuPont, Metal Powder Association B. T. DuPont, "Fundamental Facts about Iron Powder Costs", Proceedings, Second Ar nual spring meeting, Metal Powder Association, June 13, 1946 Symposium on Powder Metallurgy, Special Re Symposium on Powder Metallurgy, Special Report No. 38, The Iron and Steel Institute, Grosvenor Gardens, London, England, 1947 Henry H. Hausner, Powder Metallurgy Prince ples and Methods, Chemical Publishing C. Inc., Brooklyn, N. Y., 1947 H. M. Webber and A. G. Hotchkiss, "Furna Atmospheres for Sintering", Proceedings, seond annual spring meeting, Metal Powde Association, June 13, 1946

Association, June 13, 1946
John D. Dale, "Stainless Steel Powder", Proprint for spring meeting, Metal Powder Association, May 27, 1947
Lawrence H. Bailey, "Machinery for Compressing Powdered Metals", Powder Metalurgy Conference, Massachusetts Institute of

Technology Robert Steinitz, "Resistivity Measurements of

Robert Steinitz, "Resistivity Measurements of Iron and Steel Compacts", Powder Metallurg Bulletin, Vol. 1, Jan., 1946, p. 6
H. Christensen and C. J. Calbick, "Sinteri Process Study by Electron Micrography' American Physical Society, Washington meeing, April 29, 1948, reported in Powder Metallurgy Bulletin, Vol. 3, No. 3, May, 1948, p. 6
G. Benjamin Smith, "Compressibility Factors

for Metal Powders", preprint for fourth annual spring meeting, Metal Powder Association, April 15, 1948

James J. Kux, "Machines Used for Forming Powdered Metal Parts", American Society of Mechanical Engineers, symposium on powdered metal parts. Ech. 26, 1945

metal parts, Feb. 26, 1945
Walter E. Dalby, "Tooling for Powdered Metal Parts", preprint, fourth annual spring meeting, Metal Powder Association, April 15, 1948

A. J. Langhammer, "Bearings, Bushings and Allied Products", proceedings, third annual spring meeting, Metal Powder Association, May 27, 1947, p. 32 Walter J. Baeza, A Course in Powder Metal-

Walter J. Baeza, A Course in Powder Metallurgy, Reinhold Publishing Corp., New York, 1943

E. C. Truesdale, "Apparatus for Air Classification of Metal Powders", proceedings, Third annual spring meeting, Metal Powder Association, May 27, 1947, p. 35

Laurence Delisle and Walter V. Knopp, "Nichalle and Walter V.

Laurence Delisie and Walter V. Knopp, "Nickel Steels by Powder Metallurgy", technical publication No. 2340, American Institute of Mining and Metallurgical Engineers, New York

meeting, Feb., 1948
Pol Duwez and Howard E. Martens, "The
Powder Metallurgy of Porous Metals and Alloys Having a Controlled Porosity", Technical
Publication 2343, American Institute of Minng and Metallurgical Engineers, New York

ng and Metallurgical Engineers, New York meeting, Feb., 1948 Robert Talmadge, "The Sintering of Metal Powders", American Gas Association Sales Conference on Industrial and Commercial Gas, Windsor, Ont., April 7-9, 1948


Bulletin Describes Alloy Tubing Properties

New data, developed during the last years, on the properties and benavior in service of Croloys and other ubular materials are presented in echnical bulletin No. 6-E, "Properies of Carbon and Alloy Seamless Steel Tubing for High Temperature and High Pressure Service". ished by Babcock & Wilcox Tube Co., Beaver Falls, Pa., the bulletin mits steel compositions in the deelopment stage, listing only those hat have earned themselves a place n the list of high temperature tube teels from the standpoint of utility nd economy.

Included in the 145-page, profusey illustrated book are sections on the influence of various alloying elements, hemical composition, room temperaure and short-time tensile properties, reep testing, thermal conductivity, ir hardening properties and a essume of applications. Graphs, phopomicrographs, line drawings and bibographies are widely used.

---0---

General Electric Co., Schenectady, J. Y., has equipped its popular sizes from one to 20-horsepower) of to-ally enclosed, fan-cooled motors with newly developed, corrosion-restant Textolite cooling fans. This naterial, which is relatively inert o most corrosive atmospheres and is consparking, is reported to widen the notors' use in chemical and allied adustries and in the presence of hazrdous dust or gas.

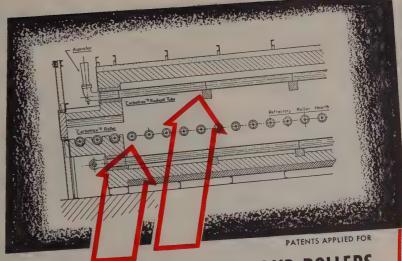


NEW TYPE RADIANT TUBES AND ROLLERS... REDUCE HEAT TREATING COSTS PROVIDE CONTROLLED ATMOSPHERES UP TO 2500° F. WITH GAS HEAT

"CARBOFRAX"* Radiant Heating Tubes and Rollers are not only reducing heat treating costs in conventional furnace operations — but also achieving temperatures up to 2500° F. in special and protective atmospheres with radiant gas heat.

Laboratory tests and actual plant operation prove these outstanding advantages of "CARBOFRAX"* Tubes and Rollers in GASMACO Industrial Furnaces:

- Lower initial cost—longer life
- Operation up to 2500° F.
- High heat transfer and fuel efficiency
- High hot load strength without oscillation
- Freedom from "crankshafting"
- Gas-tight operation
- Low heat loss through insulated water cooling

We shall be glad to send you complete information or arrange for an engineer to call.

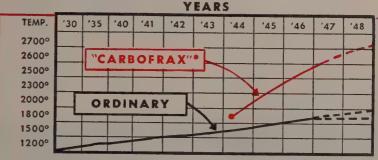

Development of high operating temperatures with "CARBOFRAX"* as compared with ordinary tubes and rollers. Because these high temperatures are economically practical, new fields are being opened in heat treating with gas fired roller hearth radiant tube furnaces.

THE GAS MACHINERY

"CARBOFRAX" is a registered trade-mark indicating manufacture by the Carborundum

WRITE FOR FOLDER A-100

Designers and Fabricators of Industrial Heating and Handling Equipment • Manufactured Gas Plants and Special Equipment

16116 WATERLOO ROAD . CLEVELAND 10, OHIO




Hot-Dip Galvanizing by the Hanlon-Gregory method provides the utmost in rust prevention for any exposed iron or steel installations.

Hot-Dip Galvanizing by Hanlon-Gregory will give *your* products or installations greater uninterrupted service, and will save you expensive replacement and maintenance costs.

The World's Largest Job Galvanizing Plant—located in the heart of the steel industry—is equipped to provide for your products this time-proven protection against rust—regardless of their quantity.


THE WORLD'S LARGEST JOB GALVANIZING PLANT

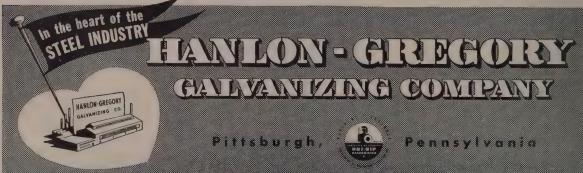

New Products and Equipment

Atmosphere Furnace

Lindberg Engineering Co., 2444 West Hubbard St., Chicago 12, Ill., is announcing an all-purpose controlled atmosphere furnace. It is suitable for hardening both high speed and air hardening steels, as well as brazing and sintering operations. Built to



operate at temperatures to 2500°F. it is heated by Globar elements.

Fan of the propeller type is built into the top part of the cooling chamber to circulate the protective atmosphere, provided by a generator of the proper type for the work involved. Charge and discharge doors are operated by air cylinders.

Check No. 1 on Reply Card for more Details

Mechanical Separator

Parts are removed from chips or mixed chips may be separated into the various sizes with the Roto-Finish mechanical separator announced by Sturgis Products Co., Sturgis, Mich. It consists of a welded steel



frame with an inclined surface on which is located a hoist pan serving as a hopper and a waist-high separating table which supports a mechanized shaker screen assembly. The inclined surface for the hoist pan support is adjustable for correct gravity flow of parts and chips onto the screen.


Height of the shaker screen assembly plus the reciprocating motion

provided by the motor drive separates parts from chips and automatically discharges the former at the opposite end. Stroke of screen assembly can be changed by variable adjustment on motor drive. Motor drive can be either a 110 or 220-440 volt geared head %-horsepower motor. Separator can be used with either Roto-Finish CW-45 or CW-60 hoist pan. Screens measuring 32 x 27 inches are available.

Check No. 2 on Reply Card for more Details

Drilling Machines

Electrically controlled hydraulic feed system of the model C2A, C3A and C4A Holesteel vertical drilling, tapping and boring machines made by National Automatic Tool Co., Rich-



mond, Ind., provides an infinitely variable feed selection within the specified range. Models are of single spindle and fixed center multiple spindle construction. Each can be supplied with either a large base (suitable for rotating and sliding type fixture applications) or small base (for adjustable table applications or stationary fixtures).

Models C2A and C3A machines can be supplied with an adjustable knee type table. The entire assembly has a vertical adjustment of approximately 12 inches. The heavy box section column prevents deflection under heavy thrust loads. Upper section encloses the hydraulic pressure pumps and piping. Single spindle head is direct motor driven and antifriction mounted. Lever-operated sliding gears allow selection of seven speeds. Combination drilling and tapping heads are provided with an independent reversing type motor for the tapping spindle drives.

Check No. 3 on Reply Card for more Details

Grinding Fixtures

All the accurate positioning features of other model grinding and indexing machines built by All Tool Co., 111 Long Ave., Hillside, N. J., are included in the company's latest



model B. It also has a special tail stock which is provided with a spring loaded adjustable center.

The arm is easily removed when not needed. Maximum distance between centers is 2% inches. Maximum diameter is 21/2 inches. Use of the fixture eliminates the need for more expensive equipment for grinding small cylindrical work such as plug gages, taps, multisplines, etc.

Check No. 4 on Reply Card for more Details

Skid Box

Scrap, castings and other heavy materials and products can be conveniently transported with the skid



box built by Phillips Mine & Mill Supply Co., 2227 Jane St., Pittsburgh 3, Pa. It is built of corrugated steel panels with double reinforced corner angle construction, rolled edge top and cast and forged steel latches.

Formed channel legs offer floor protection. The box itself is fabri-

November 22, 1948 117



Top-charging Lectromelt furnaces combine profit and quality in the production of billet size ingots. With a Lectromelt top-charge furnace

you can increase production—and can use poorer grades of scrap.

Lectromelt furnaces are available in capacities ranging from 100 tons to twenty-five pounds. Write today for complete information.

Manufactured in

CANADA

ENGLAND

SWEDEN

Lectromelt Furnaces of Canada, Ltd., Toronto 2

Birlec, Ltd., Birmingham, England

FRANCE Stein et Roubaix, Paris
BELGIUM S.A. Belge Stein et Roubaix,
Bressoux-Liege

SPAIN General Electrica Espanola, Bilbao ITALY Forni Stein, Genoa

PITTSBURGH LECTROMELT FURNACE CORP.

PITTSBURGH 30, PENNSYLVANIA

cated of Cor-Ten corrosion resisting steel. It can be used with lift trucks or crane and is available with various types of discharge doors and may be built to fit any size specifications.

Check No. 5 on Reply Card for more Details

Shearing, Trimming Lines

Equipment for production of flattened, edge-sheared and cut-to-length aluminum plate is being offered by Loewy Construction Co. Inc., Rolling Mill Division of Hydropress Inc., 570 Lexington Ave., New York 22, N. Y. There are two lines in the group, one



for $\frac{1}{2}$ -inch by 104 inches by 33 feet and the other 0.200-inch by 104 inches by 16 feet. Each line consists of feeding tables, backed-up type leveller, pinch rolls, edge trimmer, upcut shear and gage table.

On the heavy line, plates are loaded singly from pile by a vacuum lift unpiler and after being processed are removed singly by a similar piler. Edge trimmers are of the rotary shear type with knives that can be adjusted on two planes.' All knife arbors, drives, etc. are antifriction mounted. Reciprocating guillotine scrap cutters are provided, operating from a separate drive motor so as to match scrap speed and chop the short lengths. Arrangement of knife head assemblies is such that machine can be used as a gang slitter. Each line has two operating stations from which whole line can be controlled electrically.

Check No. 6 on Reply Card for more Details

Arc Welders

Alternating and direct current arc welding machines in 150, 200, 300, 400 and 500-amp capacities are being built by Metal & Thermit Corp., 120 Broadway, New York 5, N. Y. Features include built-in power factor corrector, stepless current control, forced air ventilation, wide current range and moderate open-circuit voltage operation. Instant plug-in, plug-out of electrode leads by taper type connector is provided.

Lead interchange is avoided by a permanent work lead connection. Direct current models have a one-dial simplified control panel. Operator simply plugs into the proper outlet, then dials for any required minor adjustment in current. Motor driven

units are offered in 150, 200, 300 and 400 ampere capacities in the compact 3600 revolutions per minute model and in the conventional 1750 revolutions per minute type. Engine driven




welders include 200 ampere units powered by air-cooled Wisconsin engines, and 300 and 400 ampere sets driven by Chrysler industrial engines.

Check No. 7 on Reply Card for more Details

Shear


A wide variety of materials may be accurately and rapidly sheared with the Di-Acro shear No. 4, built by O'Neil-Irwin Mfg. Co., 304 Eighth Ave., Lake City, Minn. The cutting range extends from the lightest of



materials in plastics, mica, and rubber to heavy gages of aluminum, cobalt steel, chrome molybdenum, leaded brass and stainless steel. Maximum material capacity is 24 inches wide and 16-gage sheet steel or heavier gages of more ductile materials.

All materials are clean cut, free from rough edges. A gravity chute built into the heavy base casting delivers all materials sheared. A protracting gage for squaring and mitering can be quickly and accurately adjusted for any degree of angularity

specialized ThomaStrip...

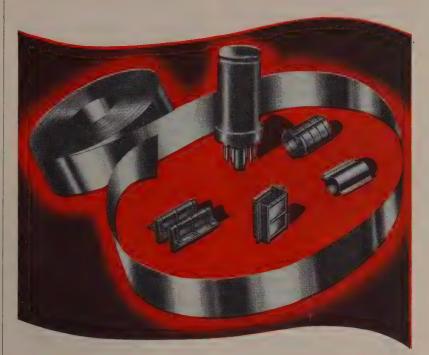

reduces raw material costs in electronic applications

For many years Specialized ThomaStrip has been the means of reducing raw material costs in the Electronics Industry. More costly metals have been replaced by Cold Rolled Strip Steel, coated and uncoated, which specifications were developed through the co-operation of the Industry and The Thomas Steel Company. Most satisfactory results have been obtained as exemplified by their continued use.

Perhaps ThomaStrip may lower your costs or give you a better finished product—or do both. Thomas' engineers welcome the opportunity to try.

THE THOMAS STEEL CO. WARREN, OHIO

COLD ROLLED STRIP STEEL SPECIALISTS



ELECTRO-COATED ZINC,
COPPER, NICKEL, AND BRASS...
HOT DIPPED TIN AND LEAD ALLOY...
LACQUER COATED IN COLORS...
UNCOATED PRECISION STRIP...
CARBON AND ALLOY SPECIALTIES


Noyember 22, 1948 119

desired. The material gage can be mounted in back of shear for accurate sizing or on front for precision trimming of edges. All four blade surfaces have a shearing edge.

Check No. 8 on Reply Card for more Details

Spindle Automatic

Revisions in the 2-5/8-inch 4-spindle automatic screw machine made by Greenlee Bros. & Co., Rockford, Ill., include an overarm added which gives



the machine a more streamlined appearance and at the same time increases the rigidity of the spindlecarrier housing, thereby permitting use of heavier tooling. The main tool slide has been strengthened by addition of gibbed ways fastened to the overarm. A new Greenlee main clutch unit insures a positive feed for

handling heavier cutting loads.

Four parallel mounted cross slides are actuated through a system of cams which are easily and quickly interchangeable. Other features include rapid adjustment of main tool slide stroke through use of a graduated worm-wheel, an easily accessible tooling area for quick set-ups and easy operating and standardized, interchangeable tooling. Work up to 8-3/16 inches in length can be han-

Check No. 9 on Reply Card for more Details

Low Voltage Controllers

General Electric Co., Schenectady 5, N. Y., is offering a new line of low voltage controllers for use with alternating current motors up to 800 horsepower (at 550 volts) and for direct current motors up to 350 horsepower (at 230 volts). They are designed for controlling squirrel cage, wound rotor, synchronous or multispeed alternating or direct current motors. Included in the one unit are the equipment needed to start, stop and control the motors, plus an integrated draw-out air circuit breaker.

Serving also as a circuit isolating device, this circuit breaker is designed so that it is readily interchangeable. When it is pulled out for inspection and test position, it is mechanically latched and disconnected from all power. Enclosures housing these controllers are 90 inches high and are factory assembled.

Check No. 10 on Reply Card for more Details

Photoelectric Counter

Counting rates up to 6000 per minute are possible with the model 310 photoelectronic counter announcd by Potter Instrument Co., 136 Roosevelt Ave., Flushing, N. Y. It is a self-



contained unit including photoelectric detector, one electronic decade and a six-digit electromechanical register. Through the use of the electronic

ACCEPTED


BY AMERICA'S LARGEST **INDUSTRIAL PLANTS** TO DO THE TOUGHEST BLASTING AND PEENING **OPERATIONS**



FAMOUS

FOR ITS ABILITY TO STAND UP UNDER REPEATED HARD USE

- ROUND
 - UNIFORM IN SIZE
 - UNIFORM IN HARDNESS
 - LACKS IRREGULAR SHAPES



UNRETOUCHED PHOTO OF HI-GRADE SHOT



RECTANGULAR SHARP TOUGH

DURABLE





MICROSCOPIC STRUCTURE OF METAL

counter decade ahead of the electromechanical register, the counting speed of the mechanical counter is scaled down by a factor of 10, thereby increasing accuracy.

Last digit of the number is registered on neon glow lamps of the electronic counter decade and the rest of the digits are indicated on the mechanical register, providing a maximum registration of seven digits. Small objects and closely spaced objects can be counted as beam width is 1/4-inch and response is to light changes are small as 25 per cent. It is also available as model 311 counter for use in counting shaft rotations without physical contact.


Check No. 11 on Reply Card for more Details

General Purpose Lathe

Twelve spindle speeds, quickly adjustable means of levers, feature the Economy lathe introduced by Rockford Machine Tool Co., Rockford, Ill. Spindle has been made of high alloy steel forging, mounted on Timken zero-precision bearings, to insure maximum accuracy and long life. Spindle nose has a No. 1 tapered key drive. Headstock gears are cut from preheat treated steel gear blanks, annealed, hobbled and shaved.

Gear lubrication is by an immer-

sion and oil-splash system. Overall design of headstock permits all types of lathe operations, including high spindle speeds and use of tungsten carbide cutting tools. Pick-off change



gears, reverse gears, V-belts and similar parts and assemblies are accessible for adjustment or repair through a hinged door on the headstock end of the lathe.

Check No. 12 on Reply Card for more Details

Contact Wheel

A contact wheel, developed by Minnesota Mining & Mfg. Co., 900 Fauquier Ave., St. Paul 6, Minn., is designed for heavy grinding with abrasive belts at speeds of 10,000 surface feet per minute or more. Advantages

cited are faster and cooler stock removal, lower production cost and chatter-free grinding.

Designated as the K wheel, it is made in 8 and 16-inch diameters, in face widths of 2, 3, 4 and 6 inches. It is for use with cloth belts coated with silicon carbide or aluminum oxide mineral grains. Reduction of grinding heat comes from use of the wheels, minimizing loading and glazing of the belt.

Check No. 13 on Reply Card for more Details

Squaring Shears

National Machinery & Equipment Co., 2129-A Pennsylvania Ave., NW, Washington 7, D. C., is producing squaring and gap shears of all stee construction, arranged for hydroelectric drive. Employed is a hydraulic pump of sufficient pressure and capacity to give the shear the proper number of strokes at sufficient power to cut their rated capacity. Pump also furnishes power to hydraulic holdowns which are of individual cylinder construction. End housings, crosshead and table are of heavy steel construction.

Gages furnished as standard equipment are two 40-inch range front gage arms with a heavy crossbar adjust-

RESPONSIBILITY OF OPERATORS FIXED

The F. G. Schenuit Rubber Company of Baltimore, Md. sells very few of their products under their own brand name. However, their large output for merchandising firms, under various names has put this company in the front rank of quality tire producers. Much of Schenuit's production is also channeled into industrial and airplane tires where high standards of endurance are required.

New and best methods

Like any other contract manufacturer, Schenuit must develop high efficiency and quality production. Shown here is operator George D. Shearer affixing his Topflight Tape number to the tire carcass he has worked on. Pressure-sensitive tape, applied in an instant, identifies his work. Because he knows his number holds him responsible, he takes greater pride and greater care.

TOPFLIGHT TAPE COMPANY

ERWIN HUBER, President

PENNA.



YORK

able the full length through the dovetail slots in the table and a back gage of the precision parallel type. A direct reading dial shows position of back gage in inches and fractions. Shear can be operated by a full length



foot treadle or with an extension foot pedal on an extension cord. Knives are of high carbon chrome alloy and have four cutting edges. Overload protection is provided by a hydraulic relief valve.

Check No. 14 on Reply Card for more Details

Electric Shear

Eighteen gage mild hot rolled steel and other materials in proportion may be cut at a speed up to 15 feet per minute with the No. 218 Unishear, manufactured by Stanley Electric Tools, New Britain, Conn. Weighing only 4-3/4 pounds, it has an improved blade action which feeds in the work



so that little effort is required to cut straight lines, curves, angles and notches with considerable accuracy.

Shear is of full ball and roller bearing construction and has automatic lubrication of plunger from gear housing, slide operated switch and few moving parts. It is furnished with rubber covered three-wire cable, wrenches, clearance gage and a supply of lubricant.

Check No. 15 on Reply Card for more Details

Electric Drill

Independent Pneumatic Tool Co., 175 State St., Aurora, Ill., is producing a 7-pound portable 1/2-inch Silver Line electric drill, designed for continuous stall-free drilling through the toughest metals. Ventilation through large slotted ports keeps the Thor heavy duty motor cool under heavy load.

Drill has a highly polished die cast

case, a free speed of 500 revolutions per minute, full ball bearing construction, removable dead handle, steel bearing inserts, removable switch handle for simple service, precision gearing and a 3-jaw Jacobs key type chuck. Its length is 11 inches.

Check No. 16 on Reply Card for more Details

• • •

COUPLINGS: O. Z. Electrical Mfg. Co., Brooklyn 2, N. Y., has added three new split couplings to its line and now offers them in conduit sizes from ½ to 5 inches. They are of one-piece, malleable iron construction.

Check No. 17 on Reply Card for more Details

JACOBS CHUCK: Designated as No. 17, a new Jacobs chuck for flexible shaft machines is offered by L & R Mfg. Co., Arlington, N. J. The handpiece is made of a two-piece aluminum housing with two presealed ball bearings and features a No. 0 Jacobs chuck with 0 to 5/32-inch range.

Check No. 18 on Reply Card for more Details

HOIST: Model 500 roofer's hoist, announced by American Hoist & Derrick Co., St. Paul 1, Minn., develops a 500 pound single line pull at 200 feet per minute as standard rating. Optional ratings are available. Hoist is gasoline powered by 4.2 horsepower single cylinder, air cooled engine.

Check No. 19 on Reply Card for more Details

AIR VENTS: Sarco Co. Inc., New York 1, N. Y., offers a new line of high pressure air vents for industrial steam equipment. Powerful phosphor bronze helical bellows with relatively large diameters permit over-size valve orifices at pressures 0 to 200 pounds per square inch.

Check No. 20 on Reply Card for more Details

BELT FASTENERS: Plategrip belt fasteners pull conveyor belt ends together into a smooth, flexible tight joint. Made of heavy gage steel and designed so that they will withstand any load the belt can safely carry, these fasteners were developed by Armstrong-Bray & Co., Chicago, Ill. Check No. 21 on Reply Card for more Details

RESIN CORE BINDER: Interlake Chemical Corp., Cleveland 14, O., announces a liquid synthetic resin core binder, designated as Ibon. It is claimed that cores of maximum baked strength and hardness are obtained at minimum binder concentration and that cores have sharper edges with

better detail and greater resistance to shock and abrasion.

Check No. 22 on Reply Card for more Details

electric tachometer measuring 2-3/4 x 5-3/8 inches is available from Electric Tachometer Corp., Philadelphia 3, Pa. Designed for continuous operation, it is housed in a cast bronze case and will operate in any position through a wide range of temperatures.

Check No. 23 on Reply Card for more Details

ALKALI-EMULSION CLEANER:
Northwest Chemical Co., Detroit 4,
Mich., offers a combination alkaliemulsion cleaner that will remove
oils and tallow based drawing compounds. It is particularly adapted
to general washing machine use prior
to bonderizing and painting.

Check No. 24 on Reply Card for more Details

MERCURY SWITCHES: Technical developments in the new mercury switches made by Durakool Inc., Elkhart, Ind., include an electric weld that seals hydrogen gas under pressure in the metal case of the switch. The closure keeps that pressure intact whether switch is in use or inactive on machine or in stock. Models range from 1 to 65 amperes in capacity and are made with or without plastic case included as standard equipment.

Check No. 25 on Reply Card for more Details

CUTTING ELECTRODE: Eutectic Welding Alloys Corp., New York 13, N. Y., offers a 3/32-inch diameter Cuttrode, a cutting electrode for stainless, bronze, nickel, and copper cutting.

Check No. 26 on Reply Card for more Details

BENCH GRINDER: A 6-inch utility bench grinder with dynamically balanced, fully enclosed motor of the permanent split capacitor type is offered by K. O. Lee Co., Aberdeen, S. D. Standard equipment includes two grinding wheels, fine and coarse; adjustable tool rests, and an abrasive wheel dresser.

Check No. 27 on Reply Card for more Details

FOR MORE INFORMATION

on the new products and equipment in this section, fill in a card. It will receive prompt attention,

Market Summary

STEEL SUPPLY—All the signs point to continued stringency in steel supply for months to come. Despite reports of some slackening of manufacturing activities in certain directions there is practically no reflection of such in steel demand. Consumer pressure for all of the major products is as strong as ever with inquiry for tonnage still far in excess of supply. Any slack which develops is quickly taken up from another direction, and, as a result, supplydemand balance appears as distant as at any time in recent months, and this in the face of record-breaking peacetime production.

QUOTAS— Pending further clarification as to what they will be called upon to supply in the way of certified tonnage, the steelmakers are continuing to move cautiously in setting up consumer quotas for the first quarter of next year. Some of the larger producers have as yet taken no action on certain important products

ARREARAGES— It now is evident that tonnage arrearages at the end of the year will be substantial. Consequently, except for certified work, the indications are rolling of newly placed orders will be pushed several weeks into the future. This is particularly true with respect to sheets and plates with certain mills having adopted a policy of blanking out January entirely.

PRODUCTION—Steelmaking and rolling facilities are being pressed to the limit of available raw material supply, and producers at some points are engaged above 100 per cent of practical capacity.


ALLOCATIONS— With demand for steel far in excess of supply, speculation is rising with respect to government policy on allocations. Last week it appeared the way was being opened for extension of the voluntary allocations programs. Public Law 395, under which these allocations are made possible, expires at the end of February but talk in Washington now is that the

law likely may be extended in one form or another by the new Congress.

RAW MATERIALS—Slightly stronger undertone is noted in scrap, especially in the East. At Buffalo sales above mill formula prices were reported last week. The longshoremen's strike has tied up a number of scrap cargoes, and as result scrap brokers report market sentiment a shade stronger momentarily. Once the strike is settled foreign scrap is expected to flow into this country in increasing quantities. Some unfortunate experiences have been had with German scrap recently at the mills. While the material is good quality some live shells have been inadvertently included in furnace charges, resulting in explosions which have damaged furnaces. Domestic scrap is flowing steadily and steelmakers' inventories now are the best in months. Pig iron supply appears improved. Sellers are under less pressure although demand still exceeds supply. Domestic production is larger and the outlook is for continued shipments from abroad. At the same time, increasing spottiness in demand for gray iron castings is noted.

PRICES—Steelmakers are holding mill price schedules unchanged. However, some adjustments in extras have been effected over the past week. One large producer revised extras on hot-rolled sheets and strip and on cold-rolled sheets resulting in increases ranging from \$1 to \$12 per ton. This interest also plans a revision in its extra card on cold-rolled strip. Several producers also have revised galvanizing extras upward to offset the recent increase in the price of zinc.

COMPOSITES—STEEL'S arithmetical price composites held unchanged last week and compared with those for the like 1947 week as follows: Finished steel, \$95.05 and \$76.09; semifinished steel, \$75.75 and \$57.20; steelmaking pig iron, \$46.29 and \$36.42; steelmaking scrap, \$43.25 and \$40.42.



DISTRICT STEEL RATES

Percentage of Ingot Capacity engaged in Leading Districts

in Leading I	istricts			
Week				
Ended		Same	Week	
Nov. 20	Change	1947		
Distabunah 07.7				
Pittsburgh 97.5	+ 0.5	100	98	
Chicago 98	1	94.5	90.5	
Eastern Pa 95	None	93.5	70	
Youngstown105	None	91	75	
Wheeling 92.5	None	93.5	93.5	
Cleveland 99	+ 2.5	90.5	93	
Buffalo104	None	88.5	61	
Birmingham100	None	103	99	
New England 90	None	87	90	
Cincinnati 99	- 4	87	87	
St. Louis 84.5	+ 2	78	72.5	
Detroit 99	None	92	89	
Estimated national				
rate 99	None	96.5	83	

Based on weekly steelmaking capacity of 1,802,476 net tons for 1948; 1,749,928 tons for 1947; 1,762,381 tons for 1946.

COMPOSITE MARKET AVERAGES

Arithmetical Price Composi	Month Ago	Year Ago	5 Years Ago		
	Nov. 20	Nov. 13	Oct. 1948	Nov. 1947	Nov. 1943
Finished Steel	\$95.05	\$95.05	\$95.05	\$76.09	\$56.73
Semifinished Steel	75.75	75.75	75.75	57.20	36.00
Steelmaking Pig Iron	46.29	46.29	46.19	36.38	23.00
Steelmaking Scrap		43.25	43.25	40.42	19.17

FINISHED STEEL WEIGHTED COMPOSITE†					
Oct. 1948	4.14340c				
Sept. 1948					
Aug. 1948					
Oct. 1947					
Oct. 1943	2.40831c				

Aug. 1948 \$48.08 43.00 46.17 47.58 46.67

43 25

43.50 43.38 43 50

\$42.75 41.50 41.75 42.75 42.25

46.56

Nov. 1947 \$37.913 36.00 38.84 37.413 39.34 36.00

36.50 34.88 38.544 36.50 36.50

\$40.00 42.40 38.75 39.875 39.625

41.81 56.25 49.00

*STRAIGHT ARITHMETICAL COMPOSITES: Computed from average industry-wide mill prices on Finished Carbon Steel (hot-rolled sheets, cold-rolled sheets, cold-rolled strip, hot-rolled bars, plates, structural shapes, basic wire, standard nails, tin plate, standard and line pipe), on Semifinished Carbon Steel (revolling billets and stabs, sheet bars, skelp, and wire rods), on Basic Pig Iron (at eight leading producing points), and on Steelworks Scrap (No. 1 melting grade at Pittsburgh, Chicago and eastern Pennsylvania). Steel arithmetical composites, dollars per net ton; pig iron and scrap, gross ton. *FINISHED STEEL WEIGHTED COMPOSITE: Computed in cents per pound, mill prices, weighted by actual monthly shipments of following products, representing about 82 per cent of steel shipments in the latest month for which statistics are available, as reported by American Iron & Steel Institute: Structural shapes; plates, standard rails; hot and cold-finished carbon bars; black butt weld pipe and tubes; black leaved pipe and tubes; black leaved pipe and tubes; black leaved pipe and tubes; black seamless pipe and tubes; drawn wire; nails and staples; tin and terne plate; hot-rolled sheets; cold-rolled sheets; galvanized sheets; hot-rolled strip; and cold-rolled strip. October, 1948, figure is preliminary.

COMPARISON OF PRICES

Representative market figures for current week; average for last month, three months and one year ago. Finished material (except tin plate) and wire rods, cents per lb; semifinished (except wire rods) and coke, dollars per net ton, others dollars per gross ton. Delivered prices represent lowest from mills.

Finished Materials					Pig Iron	
	Nov. 20, 1948	Oct. 1948	Aug. 1948	Nov. 1947	Nov. 20, 1948	Oct. 1948
Steel bars, Pittsburgh mills Steel bars, del. Philadelphia Steel bars, Chicago mills Shapes, Chicago mills Shapes, Chicago mills Shapes, Chicago mills Plates, Chicago mills Sheets, hot-rolled, Pittsburgh mills Sheets, No. 10 galv., Pittsburgh Sheets, No. 10 galv., Gary mills Sheets, No. 10 galv., Gary mills Strip, hot-rolled, Pittsburgh mills Strip, cold-rolled, Pittsburgh mills Strip, cold-rolled, Pittsburgh mills Strip, cold-rolled, Pittsburgh mills Strip tais, Pittsburgh mills	3.45c 3.79 3.35 3.275 3.25 3.48 3.50 3.40 3.71 3.275 4.00 4.40 3.25 4.00 4.40 4.40 4.40 4.40 5.715 4.325 4.325 4.325 5.775	3.45c 3.79 3.25 3.275 3.25 3.40 3.71 3.275 4.00 4.40 3.25 4.00 4.40 3.275 4.375 4.375 5.775	3.45c 3.79 3.35 3.275 3.25 3.40 3.71 3.275 4.00 4.40 4.40 3.275 4.375 5.775	2.90c 3.318 2.90 2.80 2.954 2.95 3.17 2.80 3.55 3.90 2.80 3.55 3.90 2.80 3.55 3.90 2.80 3.55 3.90 2.80 3.55 3.90 2.80	Basic, Valley	\$48.08 46.00 50.17 47.58 50.67 45.13 43.50 43.38 49.09 46.50 45.38 66.00 163.00
Tin plate, per base box, Pitts, dist. Semifinished		\$6.80	\$6.80	\$5.75	Heavy melt. steel, No. 1, Valley 42.75 Heavy melt. steel, No. 1, Cleveland. 42.25	42.75 42.25
Sheet bars, mill Slabs, Chicago Rerolling billets, Pittsburgh. Wire rod y to 1/2-inch, Pitts. dist	52.00 59.00	\$67,00° 52,00 59,00 3,775c	\$67.00° 52.00 59.00 3.775c	\$53.57 40.18 40.18 3.05e		48.15 65.50 70.75 \$14.50 17.00 20.40

[.] Nominal.

FINISHED AND SEMIFINISHED IRON, STEEL PRODUCTS

Finished steel quoted in cents per pound and semifinished in dollars per net ton, except as otherwise noted. Prices apply on an individual producer basis to products within the range of sizes, grades, finishes and specifications produced at its plants.

Semifinished Steel

Carbon Steel Ingots: Rerolling quality, standard analysis, open market, \$100-\$105 per gross ton. Forging quality \$50 per net ton, mill.

Alloy Steel Ingots: \$51 per net ton, mill.

Anoy skeel Ingoes; \$51 per net ton, mill.

Rerolling Billiets, Blooms, Slabs; \$52 per net
ton, mill, except \$62, Conshohocken, Pa.; \$66,
Monessen, Pa.; sales by smaller interests on
negotiated basis at \$85 per gross ton, or higher.

Forging Quality Billiets, Blooms, Slabs; \$61
per net ton, mill, except: \$68, Conshohocken,
Pa., mill.

Alloy Billets, Slabs, Blooms: Rerolling quality, \$63 per net ton, mill, except: \$70, Conshohocken, Pa.

en, Pa.

Sheet Bars: \$67 nom., per net ton, mill; sales in open market \$110-\$115 per gross ton.

Skelp: 3.25c per lb, mill.

Tube Rounds: \$76 per net ton, mill; suras sellers quoting up to \$120 per gross ton.

Wire Rods: Basic and acid open-hearth, 7/32 & %-lnch, inclusive, 3.40c per lb, mill, except: 3.65c, Struthers, O.; 3.70c, Worcester, Mass.; 4.05c, Pittsburg, Calif.; 4.10c, Portsmouth, O., Los Angeles; 4.15c, Monessen, Pa. One producer quotes 3.90c, Chicago base. Basic open-hearth and bessemer, not resulphurlæd, 7/32 to 47/64-lnch, inclusive, 3.50c, mill.

bars

Hot-Rolled Carbon Bars (0.H. only) and Bar-Size Shapes under 3-ln. (Base 20 tons one size): 3.35c, mill, except: 3.55c, Ecorse, Mich., Pitts-burgh, Monessen, Aljuulppa, Pa.; 4.05c, Pitts-burg, Torrance, Calif.; 4.10c, S. San Francis-co. Los Angeles, Niles, Calif., Portland, Oreg., Atlanta, Scattle; 4.20c, Kansas City, Mo.; 4.25c, Minnequa, Colo.; 5.30c, Fontana, Calif. Rail Steel Bars: (Base 10 tons): 3.35c, Moline, Ill.; 4.80c, Williamsport, Avis, Pa.; another interest quotes 5.35c, mill.

nussed in dollars per net ton, except as otherwi range of sizes, grades, finishes and specification Hot-Rolled Alloy Bars: 3.75c, mill, except: 4.05c, Ecorse, Mich.; 4.80c, Los Angeles; 5.50c, Fontana, Calif.
Hot-Rolled Alloy Bar Shapes: 4.00c, mill.
Cold-Finished Carbon Bars (Base 20.000-39,999 lb): 4.00c, mill, except: 3.95c, Pittsburgh, Cumberland, Md.; 4.20c, Indianapolis; 4.25c, Monessen, Pa.; 4.36c, Ecorse, Mich.; 4.35c, St. Louis; 4.36c, Plymouth, Mich.; 4.40c, Newark, N. J., Hartford, Putnam, Conn., Mansfield, Readville, Mass.; 4.45c, Camden, N. J.; 5.30c, Los Angeles.
Cold-Finished Alloy Bars: 4.65c, mill, except: 4.75c, Monessen, Pa.; 4.85c, indianapolis; 4.95c, Worcester, Mansfield, Mass., Hartford. High-Strength, Low-Alloy Bars: 5.10c, mill, except: 5.40c, Ecorse, Mich. Reinforcing Bars (New Billet): 3.35c, mill, except: 3.55c, Monessen, Pa.; 4.05c, Pittsburg, Torrance, Calif.; 4.10c, Atlanta, Seattle, S. San Francisco, Los Angeles; 4.25c, Minnequa, Colo, Fabricated: To consumers: 4.25c, mill, except: 5.00c, Seattle.
Reinforcing Bars (Rail Steel): 4.65c, Williamsport, Pa., mill; another interest quotes 5.35c, mill.
Wrought Iron Bars: Single Refined: 8.60c, (hand puddled), McKees Rocks. Pa.: 9.50c

mill.

Wrought Iron Bars: Single Refined; 8.60c, (hand puddled), McKees Rocks, Pa.; 9.50c, Economy, Pa. Double Refined; 11.25c (hand puddled), McKees Rocks, Pa., 11.00c, Economy, Pa. Staybolt: 12.75c, (hand puddled), McKees Rocks, Pa.; 11.30c, Economy, Pa.

Sheets

Neets

13.25c, mill, except: 3.25-3.30c, Cleveland;
3.30c, Pittsburgh; 3.45c, Ecorse, Mich.; 3.95c,
Pittsburgh, Torrance, Calif.; 5.00c, Conshohocken, Pa.; 5.65c, Fontana, Calif.; 6.25c,
Kansas City, Mo.

Hot-Rolled Sheets (19 gage and lighter, annealed): 4.15c, mill, except: 4.40c, Alabama
City, Ala.; 4.65c, Niles, O., 5.05c, Torrance,
Calif., Kokomo, Ind.

Cold-Rolled Sheets: 4.00c, mill, except: 4.20c. Granite City, Ill., Ecorse, Mich.; 4.95c, Pittsburg, Calif. Galvanized Sheets, No. 10: (Based on 5 cent zinc) 4.40c, mill, except: 5.00c, Niles, O.; 5.15c, Pittsburg, Torrance, Calif.; 5.30c, Koko-

5.15c, Pittsburg, Torrance, Calif.; 5.30c, Kokomo, Ind.
Galvannealed Sheets: 4.95c, mill, except: 5.05c, Indiana Harbor, Ind.; 5.55c, Niles, O.; 5.70c, Kokomo, Ind.
Culvert Sheets, No. 16 flat Copper Stee (based on 5-cent zinc): 5.00c, mill, except: 5.40c, Granite City, Ill.; 5.45c, Kokomo, Ind.; 5.75c, Pittsburg, Torrance, Calif.
Long Ternes, No. 10 (Commercial quality): 4.80c, mill.
Enameling Sheets, No. 12: 4.40c, mill, except:

Long Ternes, No. 10 (Commercial quality):
4.80c, mill.
Enameling Sheets, No. 12: 4.40c, mill, except:
4.60c, Granite City, Ill.; 4.70c, Ecorse, Mich.;
6.00c, Niles, O.
Silicon Sheets, No. 24: Field: 5.15c, mill
Armature: 5.45c, mill, except: 5.95c, Warren.
O.; 6.05c, Niles, O.
Electrical: Hot-rolled, 5.95c, mill, except:
6.05c, Kokomo, Ind.; 6.15c, Granite City, Ill.;
6.45c, Warren, O.; 6.55c, Niles, O.
Motor: 6.70c, mill except: 6.90c, Granite City, Ill.;
7.20c, Warren, O.; 7.95c, Follansbee, W.
Va., Toronto, O.; 7.95c, Follansbee, W.
Va., Toronto, O.; 7.70c, Granite City, Ill.;
10.00c, Brackenridge, Pa.
Transformer 72, 8.05c, mill, except: 9.15c,
Follansbee, W. Va., Toronto, O.; 11.80c,
Brackenridge, Pa. 65, 8.60c, mill, except:
9.85c, Follansbee, W. Va., Toronto, O.; 12.35c,
Erackenridge, Pa.; 58, 9.30c, mill, except:
10.55c, Follansbee, W. Va., Toronto, O.; 12.35c,
Erackenridge, Pa.; 58, 9.30c, mill, except:
10.55c, Follansbee, W. Va., Toronto, O.;
13.05c, Brackenridge, Pa.; 52, 10.10c, mill,
except: 11.35c, Follansbee, W. Va., Toronto, O.
High-Strength Low-Alloy Sheets: Hot-rolled,
4.95c, mill, except: 5.25c, Ecorse, Mich., and
Conshohocken, Pa., mills
Galvanized (No. 10), 6.75c, mill.
Cold-rolled, 6.05c, mill, except: 6.35c, Ecorse,
Mich.

Strip

Hot-kolled Strip: 3.25c mill, except: 3.30c, Cleveland, Pittsburgh, Riverdale, Ill.; 3.25-3.35c, Sharon, Pa.; 3.45c, Ecorse, Mich, Atlanta; 3.60c, Detroit; 3.70c, West Leechburg, Pa.; 4.00c, Pittsburg, Torrance, Calif.; 4.25c, Seattle, S. San Francisco, Los Angeles; 4.20c, Kansas City, Mo.; 4.30c, Minnequa, Colo.; 5.90c, Fontana, Calif. One company quotes 4.90c, Pittsburgh base.

Wider than 6-in. and 6-in. and narrower, respectively.

*Wider than 6-in, and 6-in, and narrower, respectively.

Cold-Rolled Strip (0.25 carbon and less):
4.00c, mill, except 4.00-4.25c, Warren, O.;
4.00-4.50c, Youngstown; 4.20c, Ecorse, Mich.;
4.25c, Riverdale, Ill.; 4.40-4.50c, Detroit;
4.50c, New Haven, Conn., West Leechburg, New Castle, Pa., Boston; 4.75c, Dover, O., New Kensington, Pa.; 4.50-5.00c, Trenton, N. 1, 4.80-5.05c, Wallingford, Conn.; 5.75c, Los Angeles; 7.10c, Fontana, Calif. One company quotes 4.55c, Cleveland or Pittsburgh base, and 4.75c, Worcester, Mass., base; another, 5.00c, Pittsburgh base, and 4.75c, Worcester, Mass., base; another, 5.00c, Pittsburgh base, and 4.75c, Worcester, Mass., base; another, 5.00c, Pittsburgh base, and 4.75c, Worcester, Mass., Wallingford, Conn. Ower 0.40 to 0.60 C, 5.50c, mill, except: 4.25c, Dover, O.; Chicago; 4.30c, Worcester, Mass., Wallingford, Conn., Trenton, N. J.; 5.95c, Boston; 6.00c, New Castle, Pa. Over 0.60 to 0.80 C, 6.10c, mill, except: 6.25c, Chicago; 6.35c, Dover, O.; 6.40c, Worcester, Mass., Wallingford, Bristol, Conn., Trenton, N. J.; 5.95c, Boston; 6.80c, mill, except: 6.25c, Chicago; 6.35c, mill, except: 7.85c, Dover, O.; 6.30c, mill, except: 6.25c, Chicago; 8.35c, will, except: 1.05c, Dover, O.; 10.30c, Wallingford, Conn.; 10.50c, Chicago; 10.65c, Worcester, Mass., Bristol, Conn., Trenton, N. J. Over 1.05 to 1.35 C, 10.35c, mill, except: 7.85c, Dover, O.; 10.30c, Wallingford, Conn.; 10.50c, Chicago; 10.65c, Worcester, Mass., Trenton, N. J. Cold-Rolled Alboy Strip: 9.50c, mill, except: 9.50c, mill, except: 6.35c, Ecorse, Mich., mill.

Tin, Terne Plate

Tin, Terne Plate

Tin Plate: American Coke, per base box of 100 lb, 1.25 lb coating \$6.60-\$6.80; 1.50 lb coating \$6.80-\$7.00. Pittsburg, Calif., mill \$7.35 and \$7.55, respectively, for 1.25 and 1.50 lb coatings.

1.50 lb coatings.
Electrolytic Tin Plate: Per base box of 100 lb, 0.25 lb tin, \$5.80-\$6.00; 0.50 lb tin, \$6.00-\$6.29; 0.75 lb tin, \$5.20-\$6.40.

Can Making Black Plate: Per base box of 100 lb, 55 to 70 lb basis weight, \$5.20-\$5.30; 75 to 95 lb basis weight, \$5.20-\$5.30; 75 to 95 lb basis weight, \$5.20-\$5.30; 5.55, 55.95, respectively, Plttsburg, Calif.
Holloware Enameling Black Plate: 29-gage, 4.75c per pound, except: 4.85c, Sparrows Point, Md.; 4.95c, Granite City, Ill.
Manufacturing Termes (Special Coated): Per base box of 100 lb, \$5.90, except: \$6 Fairfield, Ala., Sparrows Point, Md.
Roofing Ternes: Per package 112 sheets; 20 x 28 in., coating I.C. 8-lb, \$15.50.

Plates

Plates
Carbon Steel Plates: 3.40c, mill, except: 3.403.60c, Cleveland; 3.45c, Sparrows Point, Md.,
Johnstown, Pa., Lackawanna, N. Y.; 3.60c,
Pittsburgh; 3.65c, Ecorse, Mich.; 3.75c,
Coatesville, Pa.; 3.95c, Claymont, Del., Conshohocken, Pa.; 4.30c, Seattle, Minnequa,
Colo.; 4.56c, Houston, Tex.; 5.80c, Fontana,
Calif.; 6.50c, Harrisburg, Pa.; 6.25c, Kansas
City, Mo.
Floor Plates: 4.55c, mill.
Open-Hearth Alloy Plates: 4.40c, mill, except:
5.10c, Coatesville, Pa., mill.
High-Strength, Low-Alloy Plates: 5.20c mill,
except: 5.10c, Coatesville, Pa.; 5.30c, Conshohocken, Pa., Sparrows Point, Md., Johnstown,
Pa.; 5.85c, Ecorse, Mich., Sharon, Pa.

Shapes

Structural Shapes: 3.25c, mill, except: 3.30c, Bethlehem, Pa., Lackawanna, N. Y., Johnstown, Allquippa, Pa.; 3.85c, Torrance, Calif.; 4.15c, Minnequa, Colo; 4.30c, Seattle, S. San Francisco, Los Angeles; 5.75c, Fontana, Calif. Alloy Structural Shapes: 4.05c, mill. Steel Sheet Piling: 4.05c, mill. High-Strength, Low-Alloy Shapes: 4.95c, mill, except: 5.05c, Bethlehem, Johnstown, Pa., Lackawanna, N. Y.

Wire and Wire Products

Wire to Manufacturers (carloads): Bright, Basic or Bessemer Wire, 4.15c, mill, except: 4.25c, Sparrows Point, Md., Kokomo, Ind.; 4.45c, Worcester, Mass.; 4.50c, Monessen, Pa., Minnequa, Colo., Atlanta, Buffalo; 4.70c, Portsmouth, O.; 4.80c, Palmer, Mass.; 5.10c, Pittsburg, Calif.; 5.15c, S. San Francisco; 5.40c, Shelton, Conn. One producer quotes 4.50c, Chicago base; another, 4.50c.

Crawfordsville, Ind., freight equalized with Pittsburgh and Birmingham.

Basic MB Spring Wire, 5.55c, mill, except: 5.30c, Portsmouth, O.; 5.65c, Sparrows Point, Md., Monessen, Pa.; 5.85c, Worcester, Palmer, Mass., Trenton, N. J.; 6.50c, Pittsburg, Calif. Upholstery Spring Wire, 5,20c mill, except: 5,30c, Sparrows Point, Md., Williamsport, Pa.; 5,50c, Worcester, Mass., Trenton, N. J., New Haven, Conn.; 6,15c, Pittsburg, Calif.

Haven, Conn.; 6.150, Pittsburg, Calif.
Wire Products to Trade (carloads): Merchant Quality Wire: Annealed (6 to 8 Gage base), 4.80c, mill, except: 4.90c, Sparrows Point, Md.; 4.95c, Monessen, Pa.; 5.10c, Worcester, Mass.; 5.15c, Minnequa, Colo,, Kokomo, Ind.; 5.20c, Atlanta; 5.75c, S. San Francisco, Pittsburg, Calif. One producer quotes 5.15c, Chicago and Pittsburgh base; another, 5.20c. Crawfordsville, Ind., freight equalized with Pittsburgh and Birmingham.
Galvanized (6 to 8 Gage base), 5.25c, mill, except: 5.35c, Sparrows Point, Md.; 5.40c, Monessen, Pa.; 5.55c, Worcester, Mass.; 5.60c, Kokomo, Ind., Minnequa, Colo.; 5.65c, Atlanta; 6.20c, Pittsburg, S. San Francisco, Calif. One producer quotes 5.60c, Pittsburgh and Chicago base; another, 5.65c, Carwfordsville, Ind., freight equalized with Birmingham and Pittsburgh.

and Pittsburgh.

Nails and Staples: Standard, cement-coated and galvanized nails and polished and galvanized staples, Column 103, mill, except: 105, Sparrows Point, Md., Kokomo, Ind.; 109 Worcester, Mass.; 110 Minnequa, Colo, Atlanta; 117, Portsmouth, 0; 123, Pittsburg, Calif.; 124, Cleveland; 126, Monessen, Pa.; \$6.75 per 100 pound keg, Conshohocken, Pa., Wheeling, W. Va. One producer quotes column 109, Chicago and Pittsburgh base; another, column 113, Crawfordsville, Ind., freight equalized with Birmingham and Pittsburgh.

Waven Fence (9 to 15½ Gage, inclusive):

Woven Fence (9 to 15½ Gage, Inclusive): Column 109, mill, except: 113, Monessen, Pa., Kokomo, Ind.; 116, Minnequa, Colo.; 121 Atlanta; 132, Pittsburg, Calif. One producer quotes column 113, Pittsburgh and Chicago base; another, column 114, Crawfordsville, Ind., freight equalized with Pittsburgh and Birmingham.

Barbed Wire: Column 123 mill, except: 125, Sparrows Point, Md., Kokomo, Ind.; 126, Atlanta; 128, Monessen, Pa.; 130, Minnequa, Colo.; 143, Pittsburg, Calif.; 145, S. San Francisco. One producer quotes 127, Chicago and Pittsburgh base.

Fence Posts (with clamps): Column 114, Duluth; 115, Johnstown, Pa.; 116, Moline, Ill.; 122, Minnequa, Colo.; \$123.50 per net ton, Williamsport, Pa.

Bale Ties (single loop): Column 106, mill, except: 108, Sparrows Point, Md., Kokomo, Ind.; 110, Atlanta; 113 Minnequa, Colo.; 130, S. San Francisco, Pittsburg, Calif. One producer quotes column 115, Crawfordsville, Ind., freight equalized with Birmingham and Pitts-

Stainless Steels
(Mill prices, cents per pound)
CHROMIUM NICKEL STEELS

Type		Wire	Strip.	
No.		Shapes	Cold-Rolled	Sheets
301 .		28.50-28.75	30.50-32.00	37.50-40.75
302 .		28,50-28.75	33.00-33.75	37.50-40.75
303 .		31.00-31.50	36.50-39.75	39.50-43.00
304 .		30.00-31.25	35.00-35.75	39.50-43.00
316 .		46,00-48,00	55.00-57.25	53,00-57.25
347 .		38.50-39.75	48.50-50.25	50.00-54.00
	STR	AIGHT CHI	ROMIUM ST	EELS

23,25-23,50 28,25-33,50 32,50-33,50 23,25-23,50 27,00-27,50 34,75-35,50 32,50-33,00 60,00-62,25 46,50-50,00

STAINLESS-CLAD STEELS

	Pla	ites	She	ets
	Clad	ding-	-Clade	ling
	10%	20%	10%	20%
302	 		19.75	21.50
304	 22.50	26.50	20.75	22.50
310	 32.50	36.50		
316	 27.00	31.00	26.00	28.00
321	 23.50	27.50	_ /	
347	 25.00	29.00	24.00	26.00
405	 18.75	24.75		
410	 18.25	24.25		
430	 18.25	24.25		

Tool Steels

Tool Steel: Cents per pound, producing plants; reg. carbon 19.00c; extra carbon 22.00c; special carbon 26.50c; oil-hardening 29.00c; high carbon-chromium 52.00c; chrome hot work, 29,00c.

					Base
W	Cr	· v	Mo	Co	Per lb
18	4	1			90.50c
18	4	-2			102.50c
18	4	3			114.50c
18	4	2		9	168.50c
1.5	4	1	8.5		65.00c
6.4	4.5	1.9	5		69.50c
6	. 4	3	6		88.00

Tubular Goods

Standard Steel Pipe: Mill prices in carlots, threaded and coupled, to consumers about \$200 a net ton.

In.	Blk.	Gal.	In.	Blk.	Gal.	
1/8	391/2-	10-	1		27-	
	411/2	121/2		48 1/2	29 1/2	
1/4	371/2-	111/2-	11/4		271/2-	
	391/2	14	47/	49	30	
3%	34-	61/2-	1½	47- 491/ ₂	28- 301/2	
	36	9	2		28½ →	
1/2	401/2-	20-	4	50	31	
	43	221/2	21/2. 3		29-	
8/4	431/2-	24-	- 121	501/2	31 1/2	
	46	26 1/2	31/2 & 4	44 1/2	271/2	
Lap Weld Elec, Weld Seamless						

	Lap	Weld	Elec.	Weld	Seam	less
n,	Blk.	Gal.	Blk.	Gal.	Blk.	Gal.
	39 1/2	19 1/2	38 1/2	181/2	27-	7-
					381/2	19
1/2	421/2-	221/2-	411/2	. 21 1/2	321/2	121/2-
	43 1/2	23 1/2			411/2	22
	421/2-	221/2-	411/2	211/2	35	15
	43 1/2	24			411/2	22
1/2 & 4	421/2-	221/2-	43 1/2	23 1/2	381/2-	181/2-
	$46\frac{1}{2}$	26 1/2			431/2	24
& 6	421/2-	221/2-	43 1/2	23 1/2	381/2-	181/2
	44 1/2	24 1/2			431/2	24
					431/2	221/2

Line Steel Pipe: Mill prices in carlots to con-numers about \$200 a net ton.

	Butt	Weld			Butt V	Veld
In.	Blk.	Gal.	ſn		Blk.	Gal.
1/8	. 401/2		11/2	4	46-	28-
					48	
8/8	. 35		14	6	461/2-	281/2-
1/2	. 40-	201/2-	- '		481/2	29 1/2
		21 1/2			47-	
3/4					49	
	45	25 1/2	23	6 & 3	471/3-	29-
1					491/2	
	471/2	28 1/2	34	2 & 4	43 1/2	
	Lap V	Veld	Elec.	Weld	Seam	less
In.	Blk.	Gal.	Blk.	Gal.	Blk.	Gal.
2	381/2	181/2	371/2	171/2	26-	6-
					371/2	18
21/2	411/2-	221/2	401/2	201/2	311/2-	
	42 42				401/2	
3	411/2-	221/2	401/2	201/2	34-	14-
	421/2				401/2	21
31/2-4.	411/2-	22_	421/2	221/2	371/4-	171/2-
	451/2	25 1/2			421/2	23
5 & 6	411/2-	22	421/2	221/2	371/2-	171/2-
		,			421/2	23
8	451/2		44 1/2	231/2-	401/2-	191/2-
					44 1/2	24
10	45		44	23-	411/2-	201/2-
				231/2	44	23 1/2
12	44		43	22	401/2-	191/2-
					43	22 1/2

Standard Wrought Iron Pipe: Mill price in carlots, threaded and coupled, to consumers

410,000	Butt Weld			Lap V	Veld
In.	Bulk		In.	Bulk	
8/8	+591/2	+93	11/4	+22	+501/2
1/2	+201/2	+ 50	11/2	+151/2	+43
3/4	+101/2	+39		+ 71/2	+34
1 and			21/2-31/	2 + 5	+291/2
11/4	+ 41/2	+30	4		+23 7/2
1½	- 11/2	$+26\frac{1}{2}$	41/2-8		+25
2	2	+26	9-12.	+12	+34 1/2

Boiler Tubes: Net base c.l. prices, dollars per 100', mill; minimum wall thickness, cut

lengti	18 4 to	24"; in	clusive.		
		Sear	mless	Elec.	Weld-
O.D.	B.W.	Hot	Cold	Hot	Cold
In.	Ga.	Rolled	Drawn	Rolled	Drawn
1	13		13.39	13.00	13.00
11/4	13		15.87	13,21	15.39
11/2	13	\$15.05	17.71	14.60	17.18
1%	13	17.11	20.15	16.60	19.54
2	13	19.18	22.56	18.60	21.89
21/4	12	23.54	27.70	22,83	26.88
$2\frac{1}{2}$	12	25.79	30.33	25.02	29.41
2 3/4	12	27.33	32.14	26.51	31.18
3	12	28.68	33.76	27.82	32.74
31/4	11	33.39	39.29	32.39	38.11
31/2	11	35.85	42.20	34.78	40.94
4	10	44.51	52.35	43.17	50,78

Pipe Cast Iron: Class B, 6-in, and over, \$93.50 per net ton, Birmingham; \$106.70, del. Chicago; 4-in, pipe, \$5 higher; Class A pipe, \$5 a ton over Class B.

Rails, Supplies
Rails: Standard, over 60-lb; \$3.20 per 100 lb, mill, except: \$3.50, Indiana Harbor, Ind. Light (billet): \$3.55 per 100 lb, mill, except: \$4.25, Minnequa, Colo.
Light (rail steel): \$4.70 per 100 lb, Williams-

Light (rail steel): \$4.70 per 100 lb, Williamsport, Pa.
Railroad Supplies: Track bolts, treated: \$8.50 per 100 lb, mill. Untreated: \$8.25, mill.
Tie Plates: 4.05c mill, except: 4.20c, Pittsburg, Calif.; 4.50c, Seattle.
Splice Bars: 4.25c, mill.
Standard Spikes: 5.35c, mill, except: 5.25c, Pittsburgh.
Axles: 5.20c, mill.

RAW MATERIAL AND FUEL PRICES

Minimum delivered prices do not include 3 per cent federal tax.

Pig Iron

Per Gross Ton

	Basic	No. 2 Foundry	Malleable	Besse- mer
Bethlehem, Pa., furnace	\$48.00	\$48.50	\$49.00	\$49 50
Newark, N. J., del Brooklyn, N. Y., del	50.39	50.89 52.40	51.39 52.90	51.89
Philadelphia, del	50.17	50.67	51.17	51.67
Birmingham, furnace Cincinnati, del	42.88	43.38 49.09		
Buffalo, furnace	*47.00	*47.00	*47.50	48.00
Boston, del	55.42 49.22	55.42 49.22	55.92 49.72	50.22
Syracuse, del.	50.025		50.525	41.025
\$Chicago, district furnaces		46.00-46.50	46.50	47.00
Milwaukee, del Muskegon, Mich., del		47.72-48.22 50.98-51.48	48.22 51.48	48.72
Cleveland, furnace	46.00	46.50	46.50	47.00
Akron, del	48.17		48.67	49.17
Lone Star, Tex., furnace		†75.00		
Duluth, furnace		46.00	46.50	47.00
Erie, Pa., furnace	45.50	46.00	46.50	47.00
Everett, Mass., furnace		49.50	50.00	
Geneva, Utah, furnace	46.00	46.50		
Seattle, Tacoma, Wash., del. Portland, Oreg., del		53.63 53.63		
Los Angeles, San Francisco.	53.13	53.63		
Granite City, III., furnace	47.90		48.90	
St. Louis, del	48.65	49.15	49.65	
fronton, Utah, furnace		46.50		
‡Neville Island, Pa., furnace.	46.00		46.50	47.00
Pittsburgh, del., N.&S. Sides	47.08	47.58	47.58	48.08
Pittsburgh (Carnegie), furnaces	46.00		• • • •	47.00
Sharpsville, Pa., furnace	46.00	46.50	46.50	47.00
Steelton, Pa., furnace	48.00	48.50	49.00	49.50
Struthers, O., furnace	42.50			
Swedeland, Pa., furnace	50.00	50.50	51.00	
Toledo, O., furnace	45.50		46.50	47.00
Cincinnati, del	50.05		* * * * .	
Youngstown, O., furnace Mansfield, O., del	46.00 49.87	46.50 50.37	46.50 50.37	47.00 50.87
	20101			00101

* Republic Steel Corp. quotes \$1 a ton higher for basic, No. 2 foundry and malleable at Buffalo.

† Low phosphorus southern grade.

† To Neville Island base add: \$0.86 for McKees Rocks, Pa.; \$1.31 Lawrenceville, Homestead, McKeesport, Monaco; \$1.73 Verona; \$1.94 Brackenridge; \$1.08 for Ambridge and Aliquippa.

§ Includes, in addition to Chicago, South Chicago, Ill., East Chicago, Gary and Indiana Harbor, Ind.

Blast Furnace Silvery Pig Iron

6.00-6.50 per cent SI (base) \$59.50 6.51-7.00.. 60.75 9.01-9.50. 67.00 7.01-7.50.. 62.00 9.51-10.00. 68.25 7.51-8.00.. 63.25 10.01-10.50. 69.50 8.01-8.50.. 64.50 10.51-11.00. 70.75 8.51-9.00.. 65.75 11.01-11.50. 72.00 F.o.b. Jackson, O., per gross ton. Buffalo furnace \$1.25 higher.

Bessemer Ferrosilicon

Prices same as for blast furnace silvery iron, plus \$1 per gross ton. Electric Furnace Silvery Pig Iron \$1 14.01-14.50%, \$\$4.75 furnace, Niagara Falls; \$84 open-hearth and \$85 foundry grade, Keckuk, Iowa. Add \$1 a ton for each additional 0.5% Si to 18%; 50c for each 0.5% Mn over 1%; \$1 a ton for 0.045% max. phos.

Charcoal Pig Iron

Semi-cold blast, low phosphorus. F.o.b. furnace, Lyles, Tenn. . \$66 (For higher silicon iron a differential over and above the price of base grade is charged as well as for the hard chilling iron, Nos. 5 and 6.)

Low Phosphorus

Steelton, Pa., \$54; Buffalo, Troy, N. Y., \$50. Philadelphia, \$56.81 delivered.

Intermediate phosphorus, Central furnace, Cleveland, \$51.

Differentials

Prices are subject to following differentials:

Silicon: An additional charge of 50 cents a ton for each 0.25 per cent silicon in excess of base grade (1.75% to 2.25%).

Phosphorus: A reduction of 38 cents a ton for phosphorus content of 0.70 per cent and over.

Manganese: An additional charge of 50 cents a ton for each 0.50 per cent, or portion thereof, manganese in excess of 1%.

Nickel: An additional charge for nickel content as follows: Under 0.50%, no extra; 0.50% to 0.74%, inclusive, \$2 a ton; for each additional 0.25% nickel, \$1 a ton.

Fluorspar

Metallurgical grade, f.o.b. shipping point, in Ill., Ky., net tons, carloads, effective CaF₂ content, 70% or more \$37; less than 60% \$34.

Metallurgical Coke

Price per Net Ton

Beehive Ovens

Connellsville, furnace \$13.	50-15.50
Connellsville, foundry 16.0	00-18.00
New River, foundry	16.50
Wise county, foundry	15.35
Wise county, furnace	14.60
Oven Foundry Coke	
Kearney, N. J., ovens	\$21.50
Chicago, ovens	20.40
Chicago, del	†21.75

Oven Foundry Coke	
Kearney, N. J., ovens	\$21.50
Chicago, ovens	20.40
Chicago, del	†21.75
Detroit, del	23.95
Terre Haute, ovens	21.00
Milwaukee, ovens	21.15
Indianapolis, ovens	20.85
Chicago, del	24.00
Cincinnati, del	21.40
Detroit, del	24.40
Ironton, O., ovens	18.25
Painesville, O., ovens	20.90
Erie, del.	22.57
Cleveland, del	22.46
Buffalo, del	23.25
Birmingham, ovens	17.70
Philadelphia, ovens	20.55
Swedeland, Pa., ovens.	20.50
Portsmouth, O., ovens.	19.25
Detroit, ovens	20.65
Detroit, del	*21.65
Flint, del	22.85
Pontiac, del	21.91
Saginaw, del	23.15

Includes representative switching charge of: *, \$1; †, \$1.35.

Coal Chemicals

Spot, cents per gallon, ovens (Price effective as of Aug. 5)

	0
Pure benzol	20.00
Toluol, one degree	20.50-26.50
Toluol, two degrees	23.00-26.50
Industrial xylol	20.50-26.50

Per ton, bulk, ovens Sulphate of ammonia \$45.00

Per pound, ovens

(Effective as of Oct.	1)
Phenol, 40 (car lots, re-	
turnable drums)	13.5
Do., less than carlots	14.2
Do., tank cars	12.5
(Effective as of Oct. 2	5)

Naphthalene flakes, balls, bbl to jobbers, "household use" 13.75

Refractories

(Prices per 1000 brick, f.o.b. plant)

Fire Clay Brick

Super Duty: St. Louis, Vandalia, or Farber, Mo., Olive Hill, Ky., Clearfield, or Curwensville, Pa.,

\$100.

High-Heat Duty: Salina, Pa., \$85;
Woodbridge, N. J., St. Louis,
Farber, or Vandalia, Mo., West
Decatur, Orviston, Clearfield,
Beach Creek, or Curwensville,
Pa., Olive Hill, Hitchins, Haldeman, or Ashland, Ky., Troup, or
Athens, Tex., Stevens Pottery,
Ga., Portsmouth, or Oak Hill, O.,
\$80.

\$80.
Intermediate-Heat Duty: St. Louis, or Vandalia, Mo., West Decatur, Orviston, Beach Creek, or Clearfield, Pa., Olive Hill, Hitchins, Haldeman, or Athens, Ky., Troup, Tex., Stevens Pottery, Ga., or Portsmouth, O., \$74.

Low-Heat Duty: Oak Hill, or Portsmouth, O., Clearfield, Pa., Bessemer, Ala., \$66.

Ladle Brick

Dry Press: \$55, Freeport, Merill Station, Clearfield, Pa.; Chester, New Cumberland, W. Va.; Iron-dale, Wellsville, O.

Wire Cut: \$53, Chester, New Cum-berland, W. Va.; Wellsville, O.

Malleable Bung Brick

. Louis, Mo., Olive Hill, Ky., \$83; Beach Creek, Pa., \$73.

Silica Brick

Mt. Union, Claysburg, or Sproul, Pa., Ensley, Ala., \$80; Hays, Pa. \$85; Joliet or Rockdale, Ill., \$89; Lehi, Utah, Los Angeles, \$95.

Eastern Silica Coke Oven Shapes: Claysburg, Mt. Union, Sproul. Pa., \$80.

Illinois Silica Coke Oven Shapes: Joliet or Rockdale, Ill., \$81.

Basic Brick

(Base prices per net ton; f.o.b. works, Baltimore or Chester, Pa.)
Chrome brick or chemical-bonded chrome brick, \$69, magnesite brick, \$91; chemical-bonded magnesite, \$80.

Magnesite

(Base prices per net ton, f.o.b. works, Chewelah, Wash.)

Domestic dead-burned, %" grains: Bulk, \$31; single paper bags. \$35.50.

Dolomite

(Base prices per net ton)

(Base prices per net ton)

Domestic, dead-burned bulk: Billmeyer, Blue Bell, Williams, Plymouth Meeting, Pa., Millville, W.

Va., Narlo, Millersville, Martin,
Gibonsburg, Woodville, O., \$11.85;
Thornton, McCook, Il., \$11.95;
Dolly Sliding, Bonne Terre, Mo.,
\$12.05.

Ores

Lake Superior Iron Ore

Gross ton, 51½% (natural) Lower Lake Ports

(Any increase or decrease in R, R. freight rates, dock handling charges and taxes thereon effective after Apr. 1, 1948, are for buyer's account.)

Old range bessemer \$6.60
Old range nonbessemer 6.45
Mesabi bessemer 6.35
Mesabi nonbessemer 6.20
High phosphorus 6.20

Eastern Local Ore

Foreign Ore

Cents per unit, e.i.f. Atlantic ports Swedish basic, 60 to 68% ... 14.50 Brazil iron ore, 68-69% ... 18.50

Tungsten Ore

Wolframite and scheelite per short ton unit, duty paid \$26-\$28

Manganese Ore

48-50%, duty paid, f.o.b. cars, New York, Philadelphia, Baltimore, Nor-folk, Va., Mobile, Ala., New Or-leans, 67.60c-72.60c.

Chrome Ore

Gross ton f.o.b. cars, New York, Philadelphia, Baltimore, Charles-tom, S.C., plus ocean freight dif-ferential for delivery to Portland, Oreg., and/or Tacoma, Wash. (S 8 paying for discharge; dry basis, subject to penalties if guar-antees are not met.)

Indian and African
48% 2.8:1 \$37.50
48% 3:1 ... 39.00
48% no ratio 31.00 South African (Transvaal)
44% no ratio\$25.50-\$26.00
45% no ratio28.00-30.00
50% no ratio29.00-30.00
50% no ratio29.50-30.50

razilian—nominal
44% to 2.5:1 lump \$33.65 Brazilian–

Rhodesian

45% no ratio\$27-\$27.50 48% no ratio 30.00 48% 3:1 lump 39.00

Domestic (seller's nearest rail) 48% 3:1

Molybdenum

Sulphide conc., 1b, Mo., cont., Mines \$0.75

WAREHOUSE STEEL PRICES

Prices, cents per pound, for delivery within switching limits, subject to extras.

					BARS			_	PLATES		
	H-R 10 Ga.	SHEETS- C-R 17 Ga.	Gal. •10 Ga.	+H-R	RIP——	H-R Rds. %" to 3"	C-F Rds.	H-R Alloy	Standard Structural Shapes	Carbon	Floor %" & Thicker
Boston (city) Boston (c'try) .	5.84 5.69	6.64 6.49	7.84 7.69	6 .04 5. 89	6.90 6.75	5.69 5.54	6.39 6.24	8.24-9.74 8.09-9.59	5.54 5.39	5.89 5.74	7.34 7.19
New York (city) 5 New York(c'try) 5		6.73 6.53	7.74-7.83 7.54-7.63	6.08-6.28 5.88-6.08	• • •	5.73 5.53	6.58 6.38	8.67	5.52-5.78 5.32-5.58	5.98 5.78	7.48 7.28
Phila. (city)5 Phila. (c'try)5		6.61-6.81 6.46-6.66	7.42-7.62 7.27-7.47	5.46-5.81 5.31-5.66	• • •	5.57-5.65 5.42-5.50	6.31 6.16	8.39 8.24	5.24-5.40 5.09-5.25	5.52-5.65 5.37-5.50	6.73-7.16 6.58-7.01
Balt. (city) Balt. (c'try)	5.43† 5.28†	6.33 6.18	7.18 7.03	5.49 5.34	•••	5.54 5.39		• • •	5.48 5.33	5.68 5.53	7.18 6.98
Norfolk, Va	5.75					6.00	7.00		6.00	6.00	7.50
Wash. (w'house) 5	.81-5.97			5.87		5.88-5.92	6.58		5.82-5.86	6.02-6.06	7.47-7.51
Buffalo (del.) 5 Buff. (w'house) 5		5.95-6.00 5.80-5.85	7.75 7.60	5.70 5.55	6.50 6.35	5.35 5.20	6.05 5.90	9.50 9.40	5.25 5.10	5.60 5.45	7.70 7.58
Pitts. (w'house) 4	.85-5.00§	5.75-5.858	7.00-7.05	5.00-5.35	5.95-6.00	4.90-5.10	5.65	7.65	4.90-5.15	5.05-5.25	6.55
Det. (w'house). 5	.40-5.75§	6.30-6.60	7.60	5.40-5.70	6.50	5.45	6.17	8.12	5.45	5.65-5.80	7.10
Cleveland (del.) 5. Cleve. (w'hse) . 4.		5.90-6.29 5.75-6.14	7.34-8.00‡‡ 7.19-7.85	5.17-5.69 5.02-5.54	6.45-6.85 6.30-6.70	5.30-5.35 5.15-5.20	6.05-6.10 5.90-5.95	8.24-8.54 8.09-8.39	5.34-5.60 5.19-5.45	5.50-5.55 5.35-5.40	6.95-7.00 6.80-6.85
Cincin. (w'hse).	5.26	6.11	7.60	5.52	6.07	5.52	6.07	* * *	5.37	5.61	6.91
Chicago (city)5. Chicago (w'hse) 4.		5.90‡8 5.75‡8	7.20-7.25 7.05-7.10	5.00 4.85	6.64-6.80 6.49-6.65	5.05 4.90	5.85 5.70	8.25° 8.10°	5.05 4.90	5.25 5.10	6.70 6.55
Milwaukee (city)	5.37	6.07‡8	7.37-7.42	5.17	6.81-6.97	5.22	6.02	8.429	5.22	5.42	6.87
St. Louis (del.) St. L. (w'hse).	5.345 5.198	6.248 6.098	7.44 7.29	5.34 5.19	6.64 6.49	5.39 5.24	6.19 ¹² 6.04 ¹²	6.64 9.49	5.39 5.24	5.59 5.44	7.04 6.89
Birm'ham (city) Birm'ham(c'try)	5.20§ 5.05§	• • •	6.60 6.45	5.20 5.05	***	5.15 5.00	6.66 6.51	* * *	5.15 5.00	5.40 5.25	7.41-7.66 7.26-7.51
Omaha, Nebr	6.07	***	9.33	6,07		6.12	. 6.92		6.12	6.32	7.77
Los Ang. (city)	6.55\$	8.05	8.20†	6.75	9.50	6.20	8.00-8.50	• • •	6.70	6.40	8.15
Los Angeles (w'house)	6.405	. 7.90	8.05†	6.60	9.35	6.05	7.85-8.35	•••	6,55	6.25	8.00
San Francisco	5.9521	7.15	8.05	6.7521	8.2518	5.9021	7.55	10.20‡‡	5.90	7.60	8.10
Seattle-Tacoma .	6.3517	7.90	8.40	6.7017		6.2017	8,151	9.453	6.3011	6.3519	8,4811

Base Quantities: 400 to 1999 lb except as noted; Cold-rolled strip, 2000 lb and over; cold finished bars, 1000 lb and over; galvanized sheets, 450 to 1499 lb; 1—1500 lb and over; 2—1000 to 4999 lb; 3—450 to 39,999 lb; 4—three to 24 bundles; 5—450 to 1499 lb; 4—400 to 14,999 lb; 5—400 to 1499 lb; 10—1000 lb and over; 11—2000 lb and over; 11—2000 to 999 lb; 12—1500 to 1999 lb; 12—1500 to 39,999 lb; 13—1500 lb and over; 22—500 to 1499 lb; 23—Price (but not other price in range) applies to any and all quantities.

• Includes gage and coating extra, except Birmingham (coating extra excluded); † does not include gage extras: 1 15 gage; § 18 gage and heavier:
• as rolled; †† add 0.40 for sizes not rolled in Birmingham; 11 top level of quoted range is nominal.

Bolts, Nuts

Prices to consumers, f.o.b. midwestern plants. Sellers reserve right to meet competitors' prices, if lower. Additional discounts on car-riage and machine bolts, 5 for carloads; 15 for full containers, except tire and plow bolts.

Carriage and Machine Bolts

½-in. and smaller; up to 6 in. in length	35 off
	37 off
%-in, and larger x 6-in, and shorter	34 off
All diameters longer than 6-in	30 off-
Tire bolts	25 off
Plow bolts	47 off
Lag bolts, 6 in, and shorter	37 off
Lag bolts, longer than 6 in	35 off
Stone Polts	

In packages, nuts separate, 58½-10 off; bulk 70 off on 15,000 of 3-in, and shorter, or 5000 over 3 in., nuts separate.

	A.S.
	A.S. Reg. and
Semifinished hexagon '	Light Heavy
7 -in, and smaller	41 off
½-in, and smaller	38 off
½-in1-in	39 off
%-in,-1-in,	37 off
1½-in,-1½-in,	37 off 35 off
1%-in, and larger	34 off 28 off
Additional discount of 15 for fu	

(Packaged)	
Upset 1-in, smaller by 6-in.	
and shorter (1020 bright)	46 off
Upset (1035 heat treated)	
% and smaller x 6 and shorter	40.off
%, %, & 1 x 6 and shorter	35 off
Square Head Set Screws	
Upset 1-in, and smaller	51 off
Headless, %-in. and larger	31 off
Rivets	
F.o.b, midwestern plants	
Structural 1/2-in, and larger	6.75c
7 in. and under	48 off

Washers, Wrought

Fob shipping point, to jobbers... Net to \$1 off

FERROALLOY PRODUCT PRICES

MANGANESE ALLOYS

Spiegeleisen: (19-21% Mn, 1-3% Si) Carlot per gross ton, \$57, Palmerton, Pa.; \$66, Pitts-burgh and Chicago; (16% to 19% Mn.) \$1 per ton lower.

ton lower.

Standard Ferromanganese: (Mn 78-82%, C 7% approx.) Carload, lump, bulk \$160 per gross ton of alloy, c.l., packed, \$172; gross ton lots, packed, \$187; less gross ton lots, packed, \$204; f.o.b. Alloy, W. Va., Niagara Falls, N. Y. jor Welland, Ont. Base price; \$165, Rockwood, Tenn.; \$162, f.o.b. Birmingham and Johnstown, Pa., furnaces; \$160, Sheridan, Pa.; \$163, Aetna, Pa. Shipment from Pacific Coast warehouses on one seller add \$31 to above prices, f.o.b. Los Angeles, San Francisco, Portland, Ore. Shipment from Chicago warehouse, ton lots, \$201; less gross ton lots, \$218 fob Chicago. Add or subtract \$2 for each 1%, or fraction thereof, of contained manganese over \$2% and under 78%.

Low-Carbon Ferromanganese, Regular Grade: (Mn 80-85%). Carload, lump, bulk, max. 0.10% C, 24.75c per lb of contained Mn, carload packed 26.0c, ton lot 27.1c, less ton 28.3c. Delivered. Deduct 0.5c for max. 0.15% C grade from above prices, 1c for max. 0.30% C, 1.5c for max. 0.50% C, and 4.5c for max. 0.75% C—max 7% Si. Special Grade: (Mn 90% approx., C 0.07% max., P 0.06% max.). Add 0.5c to above prices, Spot, add 0.25c.

Medium-Carbon Ferromanganese: (Mn 80-85%, C 1.5% max., Si 1.5% max.). Carload, lump, bulk 18.15c per lb of contained Mn, carload packed 18.9c, ton 10t 20.0c, less ton 21.2c. Delivered. Spot, add 0.25c.

Manganese Metal: (Mn 96% min., Fe 2% max., Si 1% max., C 0.20% max.). Carload, 2" x D, packed 35.5c per lb of metal, ton lot 37c, less ton 39c. Delivered. Spot, add 2c. ton lot

Silicomanganese: (Mn 65-68%). Contract, lump, bulk, 1.50% C grade, 18-20% Si, 8.6e per 1b of alloy, carload packed, 9.35c, ton lot 10.25c, less ton 11.25c. Freight allowed. For 2% C grade, Si 15-17.5%, deduct 0.2c from above prices. Spot, add 0.25c.

CHROMIUM ALLOYS

High-Carbon Ferrochrome: Contract, c.l., lump, bulk 20.5c per lb of contained Cr. c.l., packed 21.4c, ton lot 22.55c, less ton 23.95c. Delivered. Spot, add 0.25c.

"SM" High-Carbon Ferrochrome: (Cr 60-65%, Si 4-6%, Mn 4-6%, C 4-6%). Add 1.1c to high-carbon ferrochrome prices.

Foundry Ferrochrome: (Cr 62-66%, C 5-7%). Contract, c.1., SMxD, bulk 22.0c per lb. of contained Cr, c.1., packed 22.9c, ton lot 24.25c, less ton 26.0c. Delivered. Spot, add 0.25c.

Low-Carbon Ferrochrome: (Cr 67-72%). Contract, carload, lump, bulk, max. 0.03% C 31.85c per lb of contained Cr, 0.04% C 29.75c, 0.05% C 29.25c, 0.06% C 28.75c, 0.10% C 28.25c-28.5c, 0.15% C 28.0c, 0.20% C 27.75c, 0.50% C 27.5c, 1% C 27.25c, 2% C 27.0c. Carload packed add 1.1c, ton lot add 2.2c, less ton add 3.9c. Delivered. Spot, add 0.25c.

"SM" Low-Carbon Ferrochrome: (Cr 62-66%, Si 4-6%, Mn 4-6%, add C 1.25% max.). Contact, carload, lump, bulk 27.75c per lb of contained chromium, carload, packed 28.85c, ton lot 30.05c, less ton 31.85c. Delivered. Spot. add 0.25c.

Low-Carbon Ferrochrome, Nitrogen Bearing: Add 5c to 0.10% C low-carbon ferrochrome prices for approx. 0.75% N. Add 5c for each 0.25% of N above 0.75%.

Chromium Metal: (Mn 97% Cr and 1% Fe).
Contract, carload, 1" x D; packed, max. 0.50%
C grade, \$1.03 per lb of contained chromium,
ton lot \$1.05, less ton \$1.07. Delivered. Spot,
add 5c.

SILICON ALLOYS

20-30% Ferrosilicon: Contract, carload, lump bulk, 16.50-17.50c per ib of contained S packed 18.90c; ton lots 20.00c, f.o.b. Niagar Falls, N. Y., freight not exceeding St. Loui rate allowed.

50% Ferrosilicon: Contract, carload, lump, bulk, 10.5c per lb of contained Si, carload (Please turn to Page 152)

Zinc Advances to 32-Year High

Prime western rises to basis of 17.50c, East St. Louis, as supplies continue tight. Stringency also rapidly developing in copper, while tin supplies increase

New York—Zinc prices have advanced 2 cents per lb. to the basis of 17.50c, East St. Louis. This is the highest level attained since 1916 and compares with the OPA wartime price of 8.25c.

Although prices of other major metals remained unchanged last week, undertone of the markets stiffened following the tie-up of foreign supplies by the longshoremen's strike.

Zinc — Strength of the domestic zinc market was seen as an aftermath of the strikes earlier this year which reduced production at a time when demand was well in excess of supplies. Following establishment of the 17.50-cent level for prime western, other grades moved proportionately higher, while a like advance was made in the price of zinc sheet, strip, and plates.

Committees representing producers, consumers and importers of zinc and copper favor continuation of the policy of establishing open-end export quotas for materials and products processed from imported ores and concentrates of those metals. However, no definite proposals were made at their meeting last week with OIT officials.

Copper—Shutdown of the Kennecott Copper Corp.'s operations in Utah due to a strike became even more serious last week when the longshoremen's strike tied up shipments of badly needed foreign metal. Imports during September held steady at about 21,370 tons, making the nine months' total 181,878 tons. The increasingly serious shortage of copper has stimulated activity in the gray market where unconfirmed sales have been reported as high as 28.00c per lb for electrolytic. The producers' market held firm, however, at 23.50c, delivered Connecticut Valley.

Deliveries of refined copper declined 10,358 tons last month to 112,580 tons while production eased 1540 tons to 101,436. These downward trends will be accelerated during the current month. Production of crude copper declined to 81,692 tons from 88,105 tons in September, the former figure including 73,754 tons from primary and 7938 tons from secondary sources. As a result of the decline in deliveries, stocks of refined metal increased 4156 tons to a total of 76,371 tons. World stocks increased 4746 tons in October to a total of 234,265 tons.

Lead — Irwin H. Cornell, former vice president and sales manager, St. Joseph Lead Co., has been named consultant to the Bureau of Federal Supply. This agency purchases strategic metals and minerals for the government's permanent stockpile. Mr. Cornell will expedite the purchases of lead which have totaled 19,000 tons compared with a goal of

70,000 tons by June 30, 1949. The methods used in acquiring the necessary tonnages will determine in large measure the impact that this program will have on industrial

Supplies continue tight, but no price changes were reported last week. The situation is aggravated by the longshoremen's strike which has tied up some cargoes. Imports of pig lead increased about 7400 tons in September to 28,504 tons, bringing the total for the first nine months to 163,954 tons compared with 113,872 tons in the like 1947 period. September imports included 3770 tons from Belgium against 471 in August, and 3443 tons from Italy against 250 in August. These imports were made at high premium prices to partially offset the shortage of domestic metal.

Tin—Stocks of pig tin held by the Office of Metals Reserve which were available for sale on Oct. 31 totaled 44,814 tons, or an increase of 3239 tons for the month and 20,259 tons for the first 10 months. Another indication of a steadily improving supply picture was the report of larger imports of ores and concentrates from Bolivia, amounting to 3255 metric tons of fine tin in September compared with 2542 tons in August. However, supplies have not increased to the extent that restrictions on use can be relaxed in the near future.

Cadmium—Effective as of Nov. 15, price of cadmium sticks and bars advanced 10 cents a lb to \$2 per lb in wholesale lots. Cadmium anodes and patented shapes advanced a like amount to \$2.10 per lb. Demand continues well in excess of supplies.

Northwest Aluminum Output Cut

Seattle — State Department of Public Utilities has called a public hearing at Seattle Nov. 23 to inquire into all phases of the power shortage with the possibility of public action to restrict the use of electricity. Representatives of the states of Oregon, Idaho and Montana, as well as public utility districts, cities and officers of the Bonneville Power Administration have been invited. Operators of both privately and publicly owned power plants are planning a campaign to restrict the use of power during certain hours to meet a potential shortage of 150,000 kws. The Bonneville Power Administration has advised four aluminum plants in this area of a cutback of 82,000 kws, effective Nov. 13, as follows: Alcoa, Vancouver, Wash., 42,200 kws; Kaiser Metals Corp., Spokane, 32,000 kws; Reynolds Metals Co., Longview, Wash., 6000 kws; Electro-Metallurgical Corp., Portland, Oreg., 1000 kws. The cutbacks are on power which had been available beyond contract minimum. Reynolds' Trout-

dale plant at Troutdale, Oreg., is not affected as it has been operating within its contract. Contracts will be observed, allowing continued operations, although lower power supplies will probably reduce aluminum output during the winter an estimated 35 million pounds.

Offers To Sell Aluminum Plant

Washington — The aluminum reduction plant at Riverbank, Calif., which was designed to produce 108 million pounds of aluminum for World War II use, is being offered for sale or lease by the Federal Works Agency. Sealed proposals for purchase or lease will be received until Jan. 12, 1949.

The plant is one of twelve industrial facilities which recently were transferred from government surplus to the National Industrial Reserve under custody of the Federal Works Agency to be placed in stand-by status. It was decided to offer the plant for sale or lease in an effort to relieve the national shortage of aluminum. Production facilities of the plant consist of three substantially completed pot lines of 128 pots per line, of which two were in service during the war. Some rehabilitation work by the purchaser or lessee will be required to put the plant back in operation.

Relocation of the facilities will be considered for approval by the Munitions Board, providing there is no decrease in the rated capacity of the relocated equipment. Costs of rehabilitation or relocation would be borne by the new operator. While some of the buildings are not movable, the functional lines and many of the structures are suitable for relocation, if it is found desirable.

Sets Aluminum Export Quotas

Washington — An export quota of 8500 tons of aluminum sheet, plate, and strip has been established for the fourth quarter of 1948 by the Office of International Trade.

Aluminum sheets, plates, and strips were added to OIT's Positive List on Aug. 25 and since that time have required licenses for shipment to any destination except Canada. For the balance of the third quarter, however, no overall ceiling was set on exports of these commodities.

Ontario Metal Output Gains

Toronto — Nickel-copper industry of Ontario, notwithstanding the fact that lower grades of ore are being treated, increased its production of nickel by 11 per cent and that of copper by 5 per cent during the first nine months this year, according to the Statistical Branch, Ontario Department of Mines. Production includes that of International Nickel Co. of Canada and Falconbridge Nickel Mines Ltd. Nickel output amounted to 190,477, 103 pounds for the three quarters of this year against 170,776,213 pounds in the 1947 period; copper output was estimated at 183,488.310 pounds compared with 174,529,644 pounds in the three quarters of 1947.

NONFERROUS METAL PRICES

(Cents per pound, carlots, except as otherwise noted)

Copper: Electrolytic, 23.50c, Conn. Valley; Lake, 23.62½c, Conn. Valley.

Brass Ingot: \$5.5-5-5-5 (No. 115) 22.00c; 88-10-2 (No. 215) 31.00c; 80-10-10 (No. 305) 27.25c; No. 1 yellow (No. 405) 17.50-18.00c. Zinc: Prime western 17.50c, brass special 17.75c, intermediate 18.00c, East St. Louis; high grade 18.50c, delivered.

Lead: Common 21.30-21.35c, chemical and corroding 21.40c, St. Louis.

Primary Aluminum: 99% plus, ingots 17.00c, pigs 16.00c. Base prices for 10,000 lb and over, fob shipping point, freight allowed.

Secondary Aluminum: Piston alloy (No. 122 type) 26.00-26.25c; No. 12 foundry alloy (No. 2 grade) 25.25-26.00c; steel deaxidizing grades, notch bars, granulated or shot: Grade 1, 27.50-28.50c; grade 2, 26.50-27.00c; grade 3, 25.50-26.25c; grade 4, 25.00-25.25c. Prices indicated the statement of clude freight at carload rate up to 75 cents per 100 lb.

Magnesium: Commercially pure (99.8%) standard ingots, 10,000 lb and over, 20.50c, fob Freeport, Tex.

Tin: Grade A, 99.8% or higher (including Straits) \$1.03; grade B, 99.8% or higher, not meeting specifications for grade A, with 0.05% max. arsenic, \$1.028; grade C, 99.65-99.79%, incl., \$1.024; 99.5-99.649% \$1.024, grade F, 98-98.999% \$1.015 for tin content. Prices are ex-dock, New York, in 5-ton lots.

Antimony: American 99-99.8% and over but not meeting specifications below, 38.50c; 99.8% and over (arsenic 0.05% max.; other impurities, 0.1% max.) 39.00c, fob Laredo, Tex., for bulk shipments.

Nickel: Electrolytic cathodes, 99.9%, base sizes at refinery, unpacked, 40.00c; 25-lb pigs, 42.50c; shot nom.; "XX" nickel shot, 43.50c; "F" nickel shot or ingots, for addition to cast tron, 40.50c. Prices include import duty. Mercury: Open market, spot, New York \$76-\$78 per 76-lb flask.

Beryllium-Copper: 3.75-4.25% Be, \$24.50 per lb contained Be.

ID contained Be.

Cadmium: "Regular" straight or flat forms, \$2. del.; special or patented shapes, \$2.10.

Cobatt: 97-98%, \$1.65 per lb for 550 lb (keg); \$1.67 per lb for 100 lb (case); \$1.72 per lb under 100 lb.

Gold: U. S. Treasury, \$35 per ounce. Silver: Open market, New York, 74.25c per

Platinum: \$93-\$96 per ounce.

Palladium: \$24 per troy ounce. Iridium: \$110-\$115 per troy ounce.

Titanium (spenge form): \$5 per pound.

Rolled, Drawn, Extruded Products

COPPER AND BRASS

(Base prices, cents per pound, fob mill) Sheet: Copper 37.18; yellow brass 33.75; commercial bronze, 95%, 37.11; 90%, 36.63; red brass, 85%, 35.64; 80%, 35.16; best quality, 34.63; nickel silver, 18%, 46.41; phosphorbronze, grade A, 5%, 56.05.

Rods: Copper, hot rolled 33.03; cold drawn 34.28; yellow brass, free cutting, 33.44; commercial bronze, 95% 36.80; 90% 36.32; red brass, 85% 35.33; 80% 34.85.

Seamless Tubing: Copper 37.22; yellow brass 36.76; commercial bronze 90% 39.29; red brass 85% 38.55; 80% 38.07.

Wire: Yellow brass 34.04; commercial bronze, 95% 37.40; 90% 36.92; red brass, 85% 35.93, 80% 35.45; best quality brass 34.92.

80% 55.40; best quanty blass 54.22. Copper Wire: Bare, soft, fob eastern mills, c.l. 29.42%c, l.c.l. 29.92%-30.05c; weather-proof, fob eastern mills, c.l. 29.60-29.85c, l.c.l. 30.35c; magnet, delivered, c.l. 32.75-33.50c, 15,000 lb or more 33.00-33.75c, l.c.l. 33.50-

Sheets and Circles: 2S and 3S mill finish c.l. (Two producers quote 1-cent per pound lower.)

				Coneu
Thickness	Widths or	Flat	Coiled	Sheet
Range.	Diameters,	Sheet	Sheet	Circlet
Inches	In., Incl.	Base*	Base	Base
0.249-0.136	12-48	26.9		
0.135-0.096	12-48	27.4		
0.095-0.077	12-48	27.9	26.0	29.6
0.076-0.068	12-48	28.5	26.2	29.8
0.067-0.061	12-48	28.5	26.2	29.8
0.060-0.048	12-48	28.7	26.4	30.1
0.047-0.038	12-48	29.1	26.6	30.4
0.037-0.030	12-48	29.5	27.0	30.9
0.029-0.024	12-48	29.9	27.3	31.3
0.023-0.024	12-36	30.5	27.7	31.8
	12-36	31.1	28.3	32.6
0.018-0.017			28.9	33.5
0.016-0.015	12-36	31.8		
0.014	12-24	32.7	29.7	34.6
0.013-0.012	12-24	33.6	30.4	35.5
0.011	12-24	34.6	31.3	36.7
0.010-0.0095	12-24	35.6	32.3	38.0
0.009-0.0085	12-20	36.8	33.4	39.5
0.008-0.0075	12-20	38.1	34.6	41.1
0.007	12-18	39.5	35.9	42.9
0.006	12-18	41.0	37.2	47.0

* Minimum length, 60 inches. † Maximum diameter, 24 inches.

Screw Machine Stock: 5000 lb and over. Round— R317-T4, 178-T4 48.0 41.0 -Hexagonal-Diam. (in.) or distance across flats R317-T4 17S-T4 0.156-0.203 0.219-0.313 0.344 38.0 47.0 44.0 45.5 36.5 36.5 36.5 0.375 45.5 44.0 0.469 36.5 45.5 44 0 0.531 41.5 36.5 0.563 41.5 43.0 0.625 0.750-1.000 37.5 37.5 37.5 1.125-1.500 34.5 36.5 1,688-2,000

LEAD

(Prices to jobbers, fob Cleveland, Pittsburgh) Sheets: Full rolls, 140 sq ft or more, \$27.25 per cwt.; add 50c per cwt., 10 sq ft to 140 sq ft; \$1.25, less than 10 sq ft; \$1, circles and segments. Pipe: Full colls, \$27.25 per cwt; cut coils, \$27.50. Traps and Bends: List price plus 80%.

ZINC

Sheets, 22.00-22.50c, fob mill, 36,000 lb and over. Ribbon zinc in coils, 20.75-21.50c, fob mill, 36,000 lb and over. Plates, not over 12-in., 19.75-20.50c; over 12-in., 20.75-21.50c.

(Base prices, fob mill.)

Sheets, cold-rolled, 60.00c. Strip, cold-rolled 66.00c. Rods and shapes, 56.00c. Plates 58.00c. Seamless tubes, 89.00c.

(Base prices, fob mill.)

Sheets, cold-rolled 47.00c; Strip, cold-rolled, 50.00c. Rods and shapes, 45.00c. Plates, 46.00c. Seamless tubes, 80.00c. Shot and blocks,

MAGNESIUM

Extruded Rounds, 12 in. long, 1.312 in, in diameter, less than 25 lb, 52.00-56.00c; 25 to 99 lb, 42.00-46.00c; 100 lb to 4000 lb.,

DAILY PRICE RECORD

	Copper	Lead	Zine	Tin	Aluminum	timony	Nickel	Silver
Oct. Avg Sept. Avg Nov. 1-6 Nov. 8-11 Nov. 12-15	23.50 23.50 23.50 23.50	19.325 19.325 21.30–21.35 21.30–21.35 21.30–21.35	15.173 15.00 15.50 15.50 15.50	103.00 103.00 103.00 103.00 103.00	16.846 16.50 17.00 17.00 17.00	37.423 35.00 38.50 38.50 38.50	40.00 40.00 40.00 40.00 40.00	77.226 75.284 74.75 74.25 74.25
Nov. 16-18	23.50	21.30-21.35	17.50	103.00	17.00	38.50	40.00	74.25

NOTE: Copper: Electrolytic, del. Conn. Valley; Lead, common grade, del. E. St. Louis; Zinc, prime western, del. St. Louis; Tin, Stratis, del. New York; Aluminum, primary ingots, 99%, del. Antimony, bulk, fob Laredo, Tex.; Nickel, electrolytic cathodes, 99.9%, base sizes at refinery, unpacked; Silver, open market, New York. Prices, cents per pound; except silver, cents per ounce.

Plating Materials

Chromie Acid: 99.9%, flake, fob Philadelphia, carloads, 26.00c; 5 tons and over 26.50c; 1 to 5 tons, 27.00c; less than 1 ton, 27.50c.

Copper Anodes: Base, 2000 to 5000 lb; fob shipping point, freight allowed: Flat un-trimmed 33.84c; oval 33.34c; electrodeposited, 31.09e; cast, 30.12c.

Copper Cyanide: 70-71% Cu, 100-lb drums, 46.00c, fob Niagara Falls, N. Y.

Sodium Cyanide: 96-98%, ½-oz ball, in 200 lb drums, 1 to 900 lb, 16.00c; 1000 to 19,900 lb, 15.00c, fob Niagara Falls, N. Y.

Copper Carbonate: 54-56% metallic Cu; 50 lb bags, up to 250 lb, 26.25c; over 250 lb, 25.25c, fob Cleveland.

Nickel Annotes: Rolled oval, carbonized, carloads, 56.00c; 10,000 to 30,000 lb, 57.00c; 3000 to 10,000 lb, 58.00c; 500 to 3000 lb, 59.00c; 100 to 500 lb, 61.00c; under 10 lb, 64.00c; fob Cleveland. Add 1 cent for rolled depolarized.

Nickel Chloride: 100-lb kegs, 26.50c; 275-lb, or 500-lb bbl, 24,50c, fob Cleveland, freight allowed on barrels, or 3 or more kegs.

The Anodes: Bar, 1000 lb and over 119.00c; 500 to 999 lb, 119.50c; 200 to 499 lb, 120.00c; less than 200 lb, 121.50c; ball, 1000 lb and over, 121.25c; 500 to 999 lb, 121.75c; 200 to 499 lb, 122.25c; less than 200 lb, 123.75c fob Sewaren, N. J.

Sodium Stannate: 25 lb cans only, less than 100 lb, to consumers 71.8c; 100 or 300 lb drums only, 100 to 500 lb, 63.8c; 600 to 1900 lb, 61.2c; 2000 to 9900 lb, 59.4c. Prices fob Sewaren, N. J.

Zinc Cyanide: 100-lb drums 39.25c, fob Cleve-land; 39.00c, Detroit; 38.00c, fob Philadelphia. Stannous Sulphate: Less than 2000 lb, in 100 lb kegs, 100.00c, in 400 lb bbl. 99.00c; more than 2000 lb, in 100 lb kegs, 99.00c, in 400 lb bbl, 98.00c, f.o.b. Carteret, Wis.

Scrap Metals

BRASS MILL ALLOWANCES

(Based on 23.50c, Conn., for copper)
Prices in cents per pound for less than 15,000
lb fob shipping point.

Clean Rod Clean

	Cream	nou	Clean		
	Heavy	Ends T	urnings		
Copper	21.125	21,125	20.375		
Yellow brass	18,000	17.750	17.125		
Commercial Bronze					
95%	20.125	19.875	19.375		
90%	19.750	19.500	19.000		
Red brass					
85%	19.750	19.500	19,000		
80%	19.500	19.250	18.750		
Best Quality (71-79%)	19.000	18.750	18.250		
Muntz Metal	17.250	17.000	16.500		
Nickel, silver, 10%	19.625	19.375	9.813		
Phos. bronze, A	22.625	22.375	21.375		
Naval brass	17.750	17.500	17.000		
Manganese bronze	17.750	17.500	16.875		

BRASS INGOT MAKERS
BUYING PRICES
(Cents per pound, fob shipping point, carload lots)
No. 1 copper 19.75, No. 2 copper 18.75, light copper 17.75, composition red brass 17.00, auto radiators 14.25, heavy yellow brass 13.00, brass pipe, 14.00.

REFINERS' BUYING PRICES
(Cents per pound, delivered refinery,
carload lots)
No. 1 copper 20.50-21.00, No. 2 copper 19.5020.00, light copper 18.50-19.00, refinery brass
(60% copper), per dry copper content 18.75.

DEALERS' BUYING PRICES
(Cents per pound, New York, in ton lots
or more)
Copper and Brass: Heavy copper and wire
No. 1 18.00-18.50, No. 2 17.00-17.50, light
copper 16.00-16.50, No. 1 composition red brass
15.25-15.50, No. 1 composition turnings 14.7515.00, mixed brass turnings 8.75-9.00, new
brass clippings 15.00-15.50, No. 1 brass rod
turnings 12.00-12.50, light brass 8.25-8.75,
heavy yellow brass 11.00-11.25, new brass rod
ends 12.50-13.00, autor radiators, unsweated
12.75-13.00, cocks and faucets 12.25-12.50,
brass pipe 12.75-13.25.
Lead: Heavy 19.50-20.00, battery plates 12.50trotype 16.50-17.00, mixed babbitt 15.75-16.25,
solder joints, 19.75-20.25.
Zine: Old zinc 10.00-10.50, new die cast scrap
9.00-9.25, old die cast scrap 6.75-7.25.
Tin: No. 1 pewter 65.00-67.00, block tin pipe
83.00-84.00, No. 1 babbitt 51.00-54.00, siphon
tops 50.00-52.00.
Aluminum: Clippings 28 16.00-16.50, old sheets
12.50-13.00, crankcase 12.50-13.00, borings and

Aluminum: Clippings 2S 16.00-16.50, old sheets 12.50-13.00, crankcase 12.50-13.00, borings and turnings 6.00-6.50, pistons, free of struts, turnings 6 12.50-13.00

OPEN MARKET PRICES, IRON AND STEEL SCRAP

Prices are dollars per gross ton, including broker's commission, delivered at consumer's plant except where noted.

Prices are dollars per gross ton, including broker's commission, delivered at consumer's plant except where noted.						
PITTSBURGH	No. 1 Busheling 42.00	No. 1 Busheling 37.00 Nos. 1 & 2 Bundles 37.00	Bar Crops and Plate. 40.00			
No. 1 Heavy Melt. Steel\$42.50-43.00*	Machine Shop Turnings 36.00	No. 3 Bundles 35.00	Cut Structurals 38.50			
No. 2 Heavy Melt. Steel 42.50-43.00* No. 1 Busheling 42.50-43.00*	Mixed Borings, Turnings 36.00 Short Shovel Turnings. 38.00	Machine Shop Turnings 29.00-29.50 Mixed Borings, Turnings 29.00-29.50 Short Shovel Turnings. 30.00-31.50	Cast Iron Grades No. 1 Cupola Cast 63.00			
Nos. 1, 2 Bundles 42.50-43.00 No. 3 Bundles 40.50-41.00	Cast Iron Borings 37.00	Punchings & Plate Scrap 42.00-42.50	Stove Plate 60.00-62.00			
Machine Shop Turnings 37 50-38 00	Cast Iron Grades	Cut Structurals 42.00-42.50 Elec. Furnace Bundles. 42.00-42.50	No. 1 Wheels 59.00-61.00			
Mixed Borings, Turnings 37.50-38.00 Short Shovel Turnings 38.00-39.50 Cast Iron Borings 39.50-40.00 Bar Crops and Plate. 49.00-50.00	No. 1 Cupola Cast 63.00 Charging Box Cast 53.00		Railroad Scrap			
Bar Crops and Plate. 49.00-50.00	Heavy Breakable Cast. 59.00	Cast Iron Grades No. 1 Cupola Cast 57.00-58.00	No. 1 R.R. Heavy Melt. 38.00 R.R. Malleable			
Low Phos. Steel 49.50-50.00 Heavy Turnings 39.50-40.00	Stove Plate 55.00 Unstripped Motor Blocks 56.00	Charging Box Cast 57.00-58.00 Heavy Breakable 58.00	Axles, Steel 50.00 Rails, Rerolling 53.00-55.00			
Cast Iron Grades	Brake Shoes 50.00 Clean Auto Cast 63.00	Unstripped Motor Blocks 53.50-54.50 Malleable 68.00-69.00	Rails, Random Lengths 45.00-48.00 Rails, 3 ft and under. 53.00-55.00			
No. 1 Cupola 65.00-66.00	Drop Broken Cast 71.00	ALAITORDIO	Angles and Splice Bars 52.00-53.00			
Machinery Cast 72.00-73.00 Charging Box Cast 61.00-62.00	Railroad Scrap	BOSTON				
Heavy Breakable Cast. 60.00-61.00 Malleable 74.00-75.00	No. 1 R.R. Heavy Melt 43.00 R.R. Malleable 75.00	(Fob shipping point)	SAN FRANCISCO			
Brake Shoe 57.50-58.00	Rails, Rerolling 62.00	No. 1 Heavy Melt. Steel \$38.90 No. 2 Heavy Melt. Steel 34.40	No. 1 Heavy Melt. Steel No. 2 Heavy Melt Steel *27.50			
Railroad Scrap	Rails, Random Lengths 58.00 Rails, 18 in. and under 63.00	No. 1 Bundles 34.40 No. 1 Busheling 34.40				
No. 1 R.R. Heavy Melt. 43.50-44.00 R.R. Malleable 75.00-80.00		Machine Shop Turnings 29.90 Mixed Borings, Turnings 29.90	No. 3 Bundles *24.50 Machine Shop Turnings *18.00			
Axles	DETROIT	Short Shovel Turnings. 31.90	Bar Crops and Plate. •27.50 Cast Steel •27.50			
Rails, Random Lengths 56.00-57.00 Rails, 3 ft and under 62.00-63.00	(Brokers' buying prices,	Bar Crops and Plate. 40.00-41.00 Punchings & Plate Scrap 40.00-41.00	Alloy Free Turnings *18.00			
Rails, 18 in. and under 63.00-64.00	fob shipping point) No. 1 Heavy Melt. Steel \$37.50-38.00	Chemical Borings 38.00-39.00				
Railroad Specialties 57.50-58.00 Uncut Tires 54.50-55.00 Angles, Splice Bars 53.00-54.00	No. 1 Busheling 37.50-38.00	Cast Iron Grades No. 1 Cupola Cast 60.00-65.00	Cast Iron Grades No. 1 Cupola Cast 50.00-65.00			
	Nos. 1 & 2 Bundles 37.50-38.00 No. 3 Bundles 37.50-38.00	Heavy Breakable Cast. 55.00-58.00 Stove Plate 54.00-55.00	Railroad Scrap			
* Plus applicable freight spring- board.	Machine Shop Turnings 31.50-32.00 Mixed Borings, Turnings 31.50-32.00 Short Shovel Turnings. 32.50-33.00	Unstripped Motor Blocks 50.00-52.00 Clean Auto Cast 54.00-56.00	No. 1 Heavy Melting •28.50 Axles •34.09			
	Cast Iron Borings 32.50-33.00	Clean Auto Cast 54.00-56.00	Axles *34.09 Rails, Random Lengths *29.00			
CLEVELAND	Punchings & Plate Scrap 42.50-43.00	CHICAGO	* Fob California shipping point.			
No. 1 Heavy Melt. Steel \$42.00-42.50° No. 2 Heavy Melt. Steel 42.00-42.50°	Cast Iron Grades	No. 1 Heavy Melt. Steel \$41.50-42.00				
No. 1 Busheling 42.00-42.50* Nos. 1 & 2 Bundles 42.00-42.50*	No. 1 Cupola Cast 60.00-65.00 Heavy Breakable Cast. 54.00-59.00	No. 2 Heavy Melt. Steel 41.50-42.00 No. 1 Bundles 41.50-42.00	SEATTLE			
Machine Shop Turnings 37.00-37.50 Mixed Borings, Turnings 36.50-38.50	Clean Auto Cast 60.00-65.00	No. 2 Bundles 41.50-42.00 No. 3 Bundles 39.50-40.00	No. 1 Heavy Melt. Steel \$27.50-29.00 No. 2 Heavy Melt. Steel 27.50-29.00 No. 1 Busheling			
Short Shovel Turnings. 38.00-38.50	DYITTAY	Machine Shop Turnings 36.50-37.00 Mixed Borings, Turnings 36.50-37.00	No. 1 Busheling 27.50-29.00 Nos 1 & 2 Bundles 27.50-29.00			
Cast Iron Borings 38.00-38.50 Bar Crops and Plate. 47.00-47.50	BUFFALO	Short Shovel Turnings. 38.50-39.00 Cast Iron Borings 37.50-38.00	No. 3 Bundles 24.50 Machine Shop Turnings 21.00-22.50			
Punchings & Plate Scrap 47.00-47.50 Heavy Turnings 42.00-43.00	No. 1 Heavy Melt. Steel \$48.00-49.00 No. 2 Heavy Melt. Steel 41.75-42.25	Bar Crops and Plate. 47.00-48.00	Mixed Borings, Turnings 21.00-22.50 Punchings & Plate Scrap 35.00			
Alkoy Free Turnings 40.00-41.00 Cut Structurals 48.50-51.50	No. 1 Busheling 41.75-42.25 No. 1 & 2 Bundles 41.75-42.25	Punchings	Cut Structurals 26.00-28.00			
Cast Iron Grades	Machine Shop Turnings 38.00-38.50 Mixed Borings, Turnings 38.00-38.50	Cut Structurals 46.50-47.00	Cast Iron Grades			
No. 1 Cupola 75.00-77.00 Charging Box Cast 62.00-64.00	Cast Iron Borings 39.00-39.50 Short Shovel Turnings. 40.00-40.50	Cast Iron Grades	No. 1 Cupola Cast 50.00 Heavy Breakable Cast. 35.00			
Stove Plate 65.00-67.00	Low Phos 49.00-51.00	No. 1 Cupola Cast 70.00-71.00 Clean Auto Cast 70.00-71.00	Stove Plate			
Heavy Breakable Cast. 57.00-62.00 Unstripped Motor Blocks 62.00-64.00	Cast Iron Grades	No. 1 Wheels 60.00-62.00	Malleable 40.00 Brake Shoes 35.00			
Malleable 79.00-81.00 Brake Shoes 55.00-57.00	No. 1 Cupola 65.75-66.25 Heavy Breakable Cast. 55.00-57.00	Railroad Scrap	Clean Auto Cast 40.00 No. 1 Wheels 37.50-40.00			
Clean Auto Cast 75.00-77.00 No. 1 Wheels 64.00-66.00	Malleable	No. 1 R.R. Heavy Melt. 45.00-46.00 Malleable 81.00-82.00	Railroad Scrap			
Burnt Cast 59.00-61.00	Railroad Scrap	Rails, Rerolling 70.00-71.00 Rails, Random Lengths 59.00-60.00	No. 1 R.R. Heavy Melt. 28.59 Railroad Malleable 30.00			
Railroad Scrap	Rails, 3 ft. and under. 59.00-61.00	Rails, 3 ft and under. 60.00-61.00	Rails, Random Lengths 30.00-32.00 Angles and Splice Bars 28.50			
No. 1 R.R. Heavy Melt. 43.00-44.00* R.R. Malleable 80.00-82.00	Railroad Specialties 58.00-60.00	Railroad Specialties 55.50-56.50 Angles, Splice Bars 56.50-57.50				
Rails, Rerolling 60.00-66.00 Rails, Random Lengths 60.00-61.00		Angles, aprice Dars 90.90-91.90	LOS ANGELES			
Rails, 3 ft and under. 63.00-66.00 Cast Steel 55.00-57.00	PHILADELPHIA	ST. LOUIS	No. 1 Heavy Melt. Steel \$27.50 No. 2 Heavy Melt. Steel 27.50			
Railroad Specialties 58.00-60.00 Uncut Tires 58.00-59.00	No. 1 Heavy Melt. Steel \$45.00-45.50 No. 2 Heavy Melt. Steel 41.50	No. 1 Heavy Melt. Steel \$44.00-45.00				
Angles, Splice Bars 61.00-63.00	No. 1 Busheling 41.50	No. 2 Heavy Melt. Steel 40.00-41.00 Machine Shop Turnings 35.00-36.00	Mixed Borings, Turnings 15.50-16.00			
* Plus applicable freight spring- board on earmarked material.	Nos. 1 & 2 Bundles 41.50 No. 3 Bundles 39.50	Short Shovel Turnings. 36.50-37.50	Punchings & Plate Scrap 28.00 Elec. Furnace Bundles 28.00			
	Machine Shop Turnings37.50Mixed Borings, Turnings37.50	Cast Iron Grades (Fob shipping point)	Cast Iron Grades			
VALLEY	Short Shovel Turnings. 38.50-39.00 Bar Crop and Plate 49.00-51.00	No. 1 Cupola Cast 65.00-66.00	No. 1 Cupola Cast 50.00-55.00			
No. 1 Heavy Melt. Steel \$42.50-43.00* No. 2 Heavy Melt. Steel 42.50-43.00	Punchings & Plate Scrap 49.00-51.00 Cut Structurals 49.00-51.00	Mixed Cast 56.00-58.00 Heavy Breakable Cast. 59.00-60.00	HAMILTON, ONT.			
No. 1 Bundles 42 50-43 00	Elec. Furnace Bundles. 47.00-48.00 Heavy Turnings 45.50-46.50	Brake Shoes 60.00-61.00 Clean Auto Cast 65.00-67.00	(Ceiling prices, delivered)			
Machine Shop Turnings 37.00-39.00 Short Shovel Turnings. 39.00-39.50 Cast Iron Borings 38.50-39.00	No. 1 Chemical Borings 46.00-46.50	Burnt Cast 59.00-60.00	Heavy Melt			
Low Phos, 48.50-50.00	Cast Iron Grades	Railroad Scrap	Mechanical Bundles 21.00 Mixed Steel Scrap 19.00			
Railroad Scrap	No. 1 Cupola Cast 63.00-65.00 No. 1 Machinery Cast. 67.00-68.00	R.R. Malleable 71.00-72.00 Rails, Rerolling 63.00-65.00	Mixed Borings, Turnings 17.00			
No. 1 R.R. Heavy Melt. 43.00-44.00*	Charging Box Cast 64.00-65.00 Heavy Breakable Cast. 62.00-62.50	Rails, Random Lengths 56.00-59.00 Rails, 3 ft and under. 60.00-61.00	Rails, Remelting 23.00 Rails, Rerolling 26.00 Bushelings 17.50			
* Plus applicable freight spring- board.	Unstripped Motor Blocks 59.50	Uncut Tires 51.00-52.00 Angles, Splice Bars 54.00-56.00	Bushelings, new factory,			
	Malleable 80.00-81.00 Clean Auto Cast 64.00-65.00	BIRMINGHAM *	prep'd 21.00 Bushelings, new factory,			
MANSFIELD	No. 1 Wheels 69.00-70.00		unprep'd			
Machine Shop Turnings \$37.50-38.00 Short Shovel Turnings. 39.50-40.00	NEW YORK	No. 1 Heavy Melt. Steel \$39.50 No. 2 Heavy Melt. Steel 39.50	Cast Iron Grades			
		No. 1 Busheling 39.50 Nos. 1 & 2 Bundles 39.00	No. 1 Cast 48.00-50.00- No. 2 Cast 44.00-45.00			
CINCINNATI	(Brokers buying prices, fob shipping point)	No. 3 Bundles 37.00 Long Turnings 24.50	• Removed from price control			
No. 1 Heavy Melt. Steel \$42.00 No. 2 Heavy Melt. Steel 42.00	No. 1 Heavy Melt. Steel \$39.00	Short Shovel Turnings. 26.00-27.00	Aug. 9, 1947; quoted on basis of fob shipping point.			
No. 2 Heavy Melt. Steel 42.00	No. 2 Heavy Melt. Steel 37.00	Cast IIOn Dollings 20.00				

For High Density Bales...use the Self-Contained

LOGEMANN Scrap Presses

Press, Pump, Tank . . . all in one compact assembly


Available with Automatic Control

Both two and three ram models are available with automatic controls . . . and are recommended when the nature of the scrap warrants such application and where high output is desired.

You conserve floor space and piping in plants and mills where space is limited . . . and at the same time, handle high tonnages at extremely low operating cost.

Pioneers in the metal baling field, LOGEMANN engineers have embodied the features proved through actual operation to be essential to constant, uninterrupted service. These same engineers are prepared to offer suggestions as to operating layout and installation of any unusual or specific need. Present your problem to them, stating the nature of your scrap and the tonnage desired. There is no obligation.

LOGEMANN BROTHERS CO. 3164 W. BURLEIGH STREET . MILWAUKEE 10, WISCONSIN

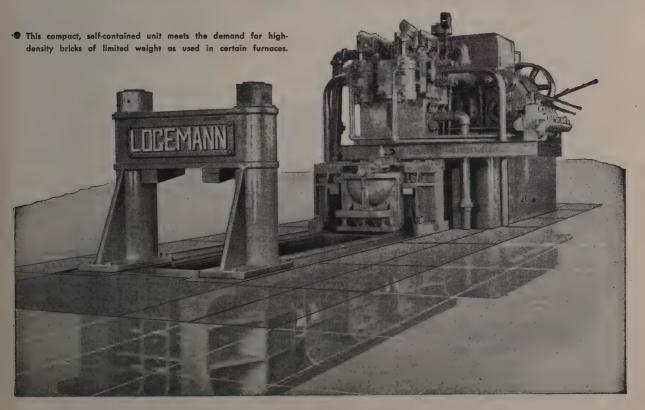

HEXAGONS

SOUARES

YEARS

"Miss Great Lakes" Gold Cup winner for '48

Depended on Wheelock, Lovejoy Alloy Steel




Photo Courtesy The Detroit News

UNUSUALLY ROUGH RACING CONDITIONS **DISABLED 12 OUT OF 14 BOATS**

Properly selected alloy steel, from which vital equipment was fabricated, played a leading role in winning the grueling 1948 Gold Cup race that saw only 2 of 14 starters cross the finish line. The winner, "MISS GREAT LAKES", driven by Danny Foster and owned by Al Fallon, had underwater struts, rudder, jack shaft and steering pitman arm made from Wheelock, Lovejoy HY-TEN B #3X steel. This particular alloy was selected and properly heat treated to meet the most rugged conditions possible. The fact that not one of these parts z failed or even bent, in spite of the terrific beating they took, is ample proof of HY-TEN's superior physicals. And it's proof too that Wheelock, Lovejoy knows steel. Perhaps you have a tough job that demands just the right steel-write Wheelock, Lovejoy today.

WL steels are metallurgically constant. This guarantees uniformity of chemistry, grain size, hardenability—thus eliminating costly changes in heat treating specifications.

Write today for your FREE COPY of the Wheelock, Lovejoy Data Book. It contains complete technical information on grades, applications, physical properties, tests, heat treating, etc.



131 Sidney St., Cambridge 39, Mass.

Warehouse Service CAMBRIDGE · CLEVELAND CHICAGO · HILLSIDE, N.J. DETROIT · BUFFALO CINCINNATI

SANDERSON-NEWBOULD, LTD., MONTREAL AJAX DISTRIBUTING CO., LTD., TORONTO

In Canada

Sheets, Strip.

Hot-rolled sheet and strip extras revised upward by a leading producer

Sheet Prices, Page 126

Cleveland - Republic Steel Corp. revised size and processing extras on hot-rolled carbon sheet and strip and cold-rolled carbon sheet Nov. 15. Adjustments were made because of increased costs, and in some cases the changes were the first to be made in

15 years.

0

FORGINGS

PRODUCTION

Revisions follow: Hot-rolled sheets, 18-gage and heavier-Increases in gage and width extras range from 10c to 35c per hundredweight; length extras, increases range from 10c to 15c cwt.; pickling (oiled or dry), up 15c cwt.; stretcher leveling (not re-15c cwt.; stretcher terving squared), up 25c cwt.; breaker pass-ing (back coiling), coils only, up 10c cwt.; resquaring, formerly per cent, now is 10 per cent; restricted thickness tolerance extras, increases range from 30c to 50c cwt. heat treatment extras, increased 25c

Hot-rolled strip-Increases in gage and width extras range from 40c to 60c cwt.; pickling (oiled or dry), increases range from 5c to 10c cwt.; cut length extras, increases range from 10c to 20c cwt.; heat treatment extras, increases range from 25c to 30c cwt.; special killed steel and special soundness quality, extras on each increased 10c cwt.

Cold-rolled sheets—Special killed eel extras, increased 10c cwt.; steel extras. stretcher leveling, now 50c cwt. on all gages, previously was 25c to 50c; resquaring, was 5 per cent, now is 10 per cent; special soundness quality of 35c cwt, instituted.


Republic is also revising its cold-

rolled strip extras book to conform with standards of a new AISI manual.

To reflect the recent increase in the price of zinc, Republic's extras on galvanized and roofing sheets in-creased last week from 5c cwt. on heavy gages to 24c cwt. on lightest

Pittsburgh — Leading galvanized sheet producers are expected to revise coating extras tables for galvanized and culvert sheets to reflect the advance of 2 cents to 17-1/2 cents per pound for prime western zinc, E. St. Since no official action has yet been taken, it is difficult to estimate the amount of increase in extras for galvanized sheets. However, it will be recalled that when zinc prices were advanced one-half cent per pound Oct. 23, galvanized sheet producers raised their coating extras an average of about \$1.25 a ton.

Sharon Steel Corp. officials expect to have company's new 14-inch hot-rolled strip mill, built by United Engineering, in full operation by middle of January. This mill will take the place of company's 9-inch hot strip mill and is expected to produce hot rolled strip in width range of 3-1/2 to 8 inches. Much of the electrical to 8 inches. units and other auxiliary equipment of the 9-inch mill will be utilized on When this the 14-inch strip mill. program is completed, company's hotrolled strip mills will include the following: Eight, 10, 14 and continuous 26-inch mills. No change is contem-

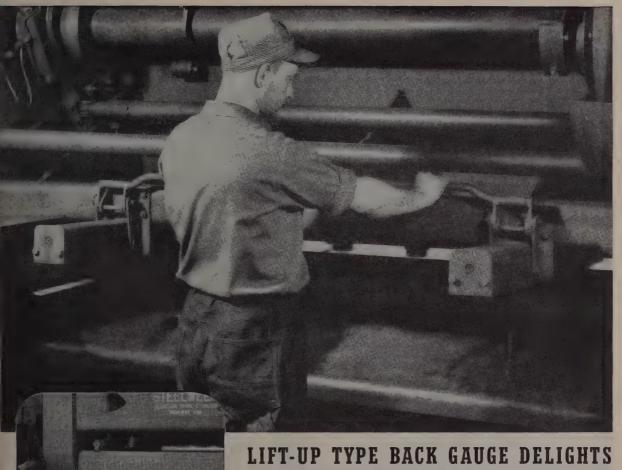


OPERATORS AND SPEEDS SHEARING

Shear operators acclaim this back gauge which can be raised up and out of the way to allow long sheets to pass through. They like its smooth easy operation when setting it for use.

The back gauge is typical of many features that make Steelweld Pivoted-Blade Shears so outstanding. It is put in or taken out of service simply by the movement of a horizontal bar. No bolts to turn. No parts to assemble.

It is convenient to adjust, too. The operating crank and dials are at the outside front corner of the shear where readily accessible, eliminating need of going around to back of machine. It is mounted on ball bearings and equipped with two dials for inch and also 64th inch readings.

The back gauge is standard equipment supplied with all Steelweld Shears. Lift-up feature is furnished only for 3%" capacity machines and larger. Metal cut on lighter machines is usually pliant enough to pass under a gauge without lift-up arrangement.



GET THIS BOOK!

CATALOG No. 2011 gives construction and engineering

THE CLEVELAND CRANE & ENGINEERING CO.

7815 EAST 282ND STREET . WICKLIFFE, OHIO

STEELWELD PINOTED BLADE



LEVELLERS, MANUFACTURERS OF: COILERS,

ROLLERS,

EDGE

OFF.

PAY

plated in company's cold-rolled strip operations

Philadelphia—Apart from special ties, sheet sellers generally have no gone far toward opening their book gone rar toward opening their book for first quarter on non-certified ton nage. Two producers have set up quotas on galvanized sheets for the entire period, but in general mill have not opened books on the ma-jor carbon grades beyond Februar and in some cases not beyond Januar with arrearages in that month con suming most of the allotment.

Some sellers of electrical sheet and at least one producer of alumi num-coated sheets have filled up thei schedules for the first three month

of next year.

Deliveries are becoming increasing ly extended on straight chromium alloy sheets, with one large mill sold ahead through most of March. Auto motive requirements of this grad are especially heavy. Other grade of stainless can be had for shipmen Other grade early in the first quarter, in some case by mid-January.

Stove makers are experiencing continued decline in demand for thei more expensive lines. However, the appear to be pressing as hard as eve for enameling stock and cold-rolle-sheets on the theory that they coul-sell more of their less expensive mod els if they had the steel to build more

Aviation Supply Office, Navy, Philadelphia, has bids on approximately 658 tons, flat packing case strapping 5/8 to 1-1/4 inch, various deliveries and closes Nov. 23 on 445,700 feet o

wrought iron pipe.

New York — No easing in shee supply is in evidence, with mills continuing to turn down heavy tonnages. Most producers have not set up quotas for the first quarter, other that for certified work, beyond January and in most cases those quotas ar comprised largely of arrearages. The tartest that the transfer is the contract of furthest that any have gone on ho and cold-rolled sheets, non-certified, February. Until matters pertaining t voluntary allotments have been clar voluntary allotments have been clarified, the mills likely will take no action for the entire quarter, eve where they are disposed to sell upo such a basis. In galvanized sheets at least two mills have set up quota for the entire first quarter, althoug on a more limited basis than for the current quarter. In some specialtie, mills also are selling ahead for the mills also are selling ahead for th whole 3-month period, where deman One seller of stainless stri is booked up for the quarter, but sti has quite a little capacity available for stainless sheets.

Boston — Shortages and mixe pattern of distribution mark flat rolled products; adding to confusion are variances in price in hot-rolled carbon sheets an strip, electrical sheets, stainles and cold-rolled strip. Differing price in hot strip and sheets center mostly in hot strip and sheets center mostl around extras, changes in which wer initiated last month by two produces but not generally followed by other With allocations limited to Januar and February, some nonintegrate cold strip sellers have not opene books officially for first quarter; whe opened, they will be down sharply be cause of heavy carryovers and will be subject to later adjustment, in lin with hot strip deliveries. Where he was twich is higher than the cartest and the strip deliveries where he material is higher due to extras, col mills are adding the cost. Outloo for low carbon is clouded. Despit

AND COILER INSTALLATION PAY-OFF, SLIT COMPLETE

can be of 5 to 20,000 width can be from and coil width can PAY-OFF REEL on the control of the c can be built in widths 18"— gages .001"—.187" To slit SLITTER

hydraulic centralized COLLER is equipped push-off; D.C. Motor drive; control for slitter and coller.

Units can be supplied individually, delivery in approximately six months be supplied

equipment is located at the plant of Edg. comb Steel Co., Philadelphia


You don't need to hold up production

...FOR LACK OF A SHAPE LIKE THIS

Just this one steel plate shape is used by a manufacturer who specializes on a single. farm implement. It wouldn't be economical, therefore, for him to own and operate heavy press equipment because he couldn't keep it busy. One hour's work would stamp out a week's supply of the brackets.

Instead, he buys the part by the thousands from By-Products Steel Co. and gets it ready for finishing. (We have over 150 major machines for doing such work on steel plate-flame-cutting, shearing, pressing, blanking, bending and other forming operations.)

Because By-Products Steel Co. is located at the source for steel plate, the scrap produced in cutting out your shapes goes right back to Lukens open hearths, where its value is highest. You pay freight



This bracket is blanked by By-Products Steel Co. from 3/8" plate.

only on the weight of the part you want. Your scrap losses and handling charges are lower.

For Bulletin 270 showing the wide range of work we do, write By-Products Steel Co., Division of Lukens Steel Company, 414 Strode Avenue, Coatesville, Penna.

... of interest to you .. "HEAD WORK", a 16mm motion picture in sound and color, on spinning and pressing of Lukens Heads is available without charge. Running time: 27 minutes. Write for a booking date.

BY-PRODUCTS STEEL CO.-

STEEL PLATE SHAPES . . . FLAME-CUT . BENT . SHEARED . PRESSED . BLANKED . WELDED

BY-PRODUCTS

This BAKER TRUCK

Box Score Indicates a Winner!

CUSTOMER: Appliance Division, The Cavalier Corp., Chattanooga, Tennessee.

PRODUCTS: Coca-Cola cooler-dispenser, Quaker Oil space heater.

TRUCKS: 6 Baker Fork Trucks-4 2000-lb. and 2 6000-lb. capacity.



Baker 6000-1b. Fork Truck unloading skidded 6-ton packages of sheet steel from gondola cars with chain sling.

Same truck tiering sheet steel packages in storage department.



OPERATION	TRUCKS USED	RESULTS
Unloading steel sheets in 3-ton skidded packages from gondola cars (50 tons per car). Transporting to storage and tiering.	Baker 6000-1b. Fork Trucks	48 man hours cut to 4. Formerly took 6 men 8 hours for unloading alone. Now 2 men safely unload and store a carload in 2 hours.
Handling steel sheets from stores into production line.	Baker 6000-1b. Fork Trucks	More man hours saved. Aisles kept clear.
Handling and storing dies for stamping and blanking departments.	Baker 6000-1b. Fork Trucks	Time and storage space saved.
Moving finished products in cases to storage.	Baker 2000-lb. Fork Trucks	Operation speeded 50%. Ware- house capacity increased 50%.
Moving finished products from storage into boxcars.	Baker 2000-lb. Fork Trucks	16 man hours cut to 1. Formerly took 4 men 4 hours to load a car. Now 1 man does it in about 1 hour.



Baker 2000-1b. Fork Truck tiering cases of finished product in warehouse.

> Baker 2000-1b. Fork Truck loading cases into boxcars.



The Baker Material Handling Engineer is at your service to help you improve your material handling box score.

BAKER INDUSTRIAL TRUCK DIVISION of The Baker-Raulang Company 2167 West 25th Street . Cleveland, Ohio

In Canada: Railway and Power Engineering Corporation, Ltd.

Baker industrial trucks

slackening in retail demand for some products, there is no easing in steel; in several industries where layoffs have been made there is still pressure for steel, as in case of typewriter as-sembly plants. Alloy demand is strong, notably for roller chain-mak-

Chicago-A change in the steel situation seems to be in the making despite the darker outlook for the near future. More soft spots are appearing in industrial production and, while individually these have little significance, a pattern may be in for-mation by which an orderly retirement from the present abnormally high production levels will come. Pipelines have filled for a wide variety of consumers goods which only last year were difficult to obtain. The reported slowing down in de-mand for automobiles has not translated itself yet into declining pressure for automotive steels, and it seems probable that autobuilders' clamor for more steel will mount next quarter when carryover tonnage reduces the new period's quotas by roughly one month's production. One district mill has blanked out January for hot-rolled sheets, with other interests' carryovers also approximating that volume.


Cincinnati — Sheet mills are trying to complete their first quarter
schedules. Handicaps include indefinite tonnage involved in the voluntary allocation programs. Persistence
of demand proves the pinch in suplies will not be relieved to any explies will not be relieved to any extent. The blast furnace in Martin's Ferry, supplying Newport, Ky., open hearths of the Detrola Corp., is out for 30 days for repairs.


St. Louis - Sheet makers have filled first-quanter allocations cautiously, leaving a margin of safety in the hope of keeping abreast of deliveries throughout next year. Granite City Steel Co., especially, has resolved to keep current. Its produc-tion of cold-rolled steel recently has been picking up around 3000 tons each month and reached a probable 21,000 in November. On that basis, the company's new cold reduction mill would reach its 25,000 ton practical capacity in January or February. But orders are not being taken on that expectation, since repairs on a turbine and the slab mill run-out table are due in April. These, plus continuing adjustment difficulties in the new equipment, probably will de-lay capacity output until spring or later.

Birmingham — Demand for sheets shows not the slightest tendency to level off. Production holds at virtual capacity, although a considerable proportion of output in the district goes

into tin plate.


Los Angeles - Hard-pressed suppliers report that sheet continues to be the No. 1 scarcity. Demand is as strong as ever for flat-rolled prod-ucts, although a minor tapering in new orders is being experienced in some other categories in which supplies come a little closer to meeting requirements. There is a growing feeling that one of the typical characteristics of shortage markets is coming more strongly into evidence here. Suppliers believe that many small users for months past have been taking their full quotas even when current needs declined.











he most efficient type of foundry oven for any particular foundry depends on the type and volume of work being handled by that organization and other local conditions.

Because there are so many important variables in oven construction and in oven operation, the greatest economy is assured when the foundry oven is engineered especially for the work it is to do and under the working conditions in that particular foundry.

Consult a Young Brothers engineer before you make your plans for an oven installation. Get all the facts. It may save you considerable in initial and operating costs.

Young Brothers Company

6503 Mack Avenue

Detroit 7, Michigan





Here's Why You Can Save Money on Horsburgh & Scott Helical Speed Reducers . . .

- 1. Lower cost in manufacture and assembly by engineered simplicity of design.
- 2. Savings in maintenance and freedom from breakdowns through rugged construction from the finest materials and precision manufacture.

These features are your guarantee of better built speed reducers that last longer.



Plates . . .

Plate Prices, Page 127

New York — Tank fabricators continue to be badly handicapped by the shortage of steel, particularly plates. One large fabricator could handle 60 to 70 per cent more business, if a sufficient amount of steel were available.

were available.

At present, there is a seasonal slackening in demand for water tanks and with backlogs so heavy, most fabricators welcome this easing. Most tank fabricators are unable to promise shipments under 12 months, with erection taking anywhere from two to five months in addition. Fabricators' backlogs normally run around two and a half to three months.

In-addition to seasonal influences,

In-addition to seasonal influences, demand for water tanks is also adversly affected by extended deliveries and mounting costs.

Philadelphia — District plate mills are operating at the highest level this year, probably at the highest postwar level. However, most mills will have substantial arrearages at the end of this year, averaging perhaps around four weeks' production. Producers generally are not disposed to set up consumer quotas for shipment beyond February, although in some cases tentative assurances have been made

Chicago—What specifically was on the agenda for the Steel Products Advisory Committee when it met in Washington last Friday was not clear even to many of the members, but some of those who had concluded after the last meeting that the expiration date of Public Law 395 would preclude putting new programs into operation went back to Washington fully aware that the election outcome could cause an about-face in their thinking that voluntary allocations might soon be a thing of the past. Most noticeably affected by allocations among steel products is plates, and the strengthened position of the program since the election may well presage an even tighter supply situation in this product for nonparticipating industries. The acuteness of this situation makes itself known through various expedients being experimented with as substitutes for carbon plates; thus, high-strength, low-alloy steel has been eyed for its possible use in storage tanks and the like, despite its high cost. Allocations as they now stand have set back one producer's delivery promises on plates from one to two months, and if additional plate consuming industries come into

finitely greater delays to other users appear inevitable.


Birmingham—Assignment of plate tonnage for first quarter is not completed, although some deliveries have been scheduled through January. Pressure for plates remains as great as ever and the gap between supply

the allocation scheme as the result of

the latest advisory group meeting, in-

and demand remains wide.

Los Angeles—Plate demand is far out-running supply. Consumers have been warned by some suppliers that quotas for next year will be even lower than 1948. Plates and angles are in heavy demand for South American oil field use, but not much material is to be had.

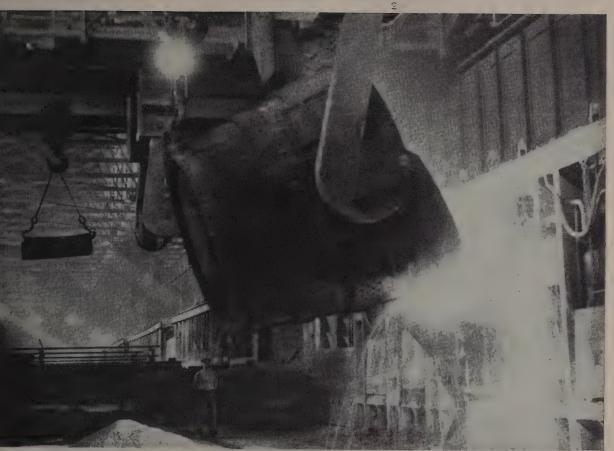

ROBINSON SILICA BRICK LENGTHENS FURNACE LIFE-SPAN

You can depend on longer life with more tonnage per day from a furnace lined with Robinson Silica Brick. There are good reasons why it withstands long, hard service under extreme conditions of furnace operation! High quality ganister is selected for the minimum of harmful impurities before processing. Very low alumina content insures maximum strength at high temperatures. Modern manufacturing methods impart extreme density and high

resistance to spalling and slagging. Strict laboratory control in all phases of manufacture keeps quality at a *uniform* high for longer life and better service! Robinson FRC Silica Brick saves you money by decreasing brick consumption and cutting rebuilding costs! For *dependable* furnace performance, it's Robinson Silica Brick—one of the Robinson line of *uniform* refractories!

ROBINSON
REFRACTORIES
ARE Uniform

Write For Your Free Copy Of The Robinson Refractories Catalog You'll find information in it that you'll use all the time. Just drop a line to The Robinson Clay Product Co., Akron 9, Ohio and we'll mail your copy immediately.

Robinson Engineered Refractories: Silica Brick, Fire Brick, High-Temperature Bonding Mortar, Castable Refractories, Plastic Fire Brick, Acid-Proof Cement, Fire Clays, Super-Duty Plastics. ROBINSON CLAY PRODUCT CO. AKRON 9, OHIO

R-148-6



shown above, are part of the battery of presses for forming interior and exterior panels and small parts used in the construction of LUSTRON prefabricated homes. The view at left shows the press in detail.

WILLIAMS-WHITE Production Machines are custom built to meet your particular needs . . . designed to lower operating costs and do your work more efficiently. The experience gained in nearly 100 years building the basic tools of industry is available to you through our staff of engineers and designers.

Write us, giving as much information as possible about the tools you need, and we will send detailed specifications without obligation on your part.

MAKERS OF PRECISION PRODUCTION TOOLS FOR NEARLY 100 YEARS

Williams-White & Co. MOLINE, ILLINOIS

Steel Bars

Bar Prices, Page 126

Pittsburgh—A growing stability demand for alloy bars, in contra to sporadic large tonnage purchase noted earlier this year, is reported by producing interests. However, ne bookings continue to surpass prodution schedules throughout almost th entire range of size classification Distribution pattern of alloy ste product shipments has been altered to extent of heavier tonnage commi ments under the military allocatic program. This program was originally scheduled to get under we during October, but some participants were unable to make the ne essary production "lead time." Fin approval is expected momentaries. approval is expected momentari for extension beyond Feb. 28 of ste "set asides" (totaling about 102,50 tons monthly) for the armed force Current heavy demand for alloy ba is attributed in part to augment requirements for the aircraft pr gram and to better balanced she inventories among automotive pr ducers, permitting increased asser bly schedules. Considerable tonna also is being shipped to the chem cal and petroleum industries.

New York — Hot carbon bar selle in a few cases have set up gener consumer quotas for the first tv months of next quarter, but mo have been unable to set up sche nave been unable to set up some ules beyond January, with allowanc for arrearages affecting the gre bulk of tonnage scheduled for shi ment during that month. Some di trict sellers here claim that custor ers will receive practically no ne tonnage in January.

Cold-drawn carbon bar sellers ha

long since set up quotas for the e tire first quarter, with a number a tually having accepted specification for shipment beyond. Alloy bar bus ness is becoming increasingly exten ed, with one large producer book up for the first quarter, except f electric furnace aircraft quality s loys and stainless bars. The latter ca be had for shipment within three four weeks.

Philadelphia - Hot carbon bar d mand continues diversified, with se ers moving cautiously in establishing non-certified allotments for first qua ter. They have, however, long sin set up quotas for the quarter on col drawn bars, and in some instance have booked substantial tonnages f shipment beyond.

Seattle - Local bar mills are ba to a normal ratio of about 60 per ce reinforcing and 40 per cent mercha bars. this having been reversed du ing the war when merchant bars we in greater demand. Construction as public works jobs have stimulat the use of reinforcing bars of whi sizable backlogs are reported. Plan are making every effort to speed deli

Tubular Goods

Tubular Goods Prices, Page 127

Pittsburgh—Galvanized pipe pr ducers are expected to advance price \$4 per ton to reflect 2 cents p pound advance in prime weste zinc to 17½ cents, East St. Lou Up to mid-week, one leading pr

ducer, who previously announced policy of tying price of galvanized pipe to that of zinc, was expected to officially take such action by close of

ficially take such action by close of last week. Other producers contacted indicated they likewise would take similar action in the near future. Fretz-Moon Tube Co. Inc., Butler, Pa., advanced standard and extra heavy ½-inch galvanized pipe \$3 a ton, effective Nov. 18. This action was necessitated by the 2-cent perceived in primary give and pound increase in primary zinc and also included adjustment of \$4 in prices for ¼ inch and %-inch size classifications.

Los Angeles-Although the petroleum strike is virtually over, and all but one major company have resumed normal operations, there has been no general increase in buying by producers or equipment fabricators to aggravate the already tight supply situation. Next to sheets, pipe is the No. 2 scarcity here and quotas for this item generally will be lower next year. Some eastern mills have temporarily withdrawn from the pipe market in this area.

Wire .

Wire Prices, Page 127

New York - First quarter wire allocation schedules are jelling slowly; indications are there will be no increase in overall quotas, but some producers look for slight easing in pressure. For aircraft and welding electrodes, trend is up; backlogs for the latter are higher and growing. On the other hand, bedding and up-holstery spring material remains in the dumps and on the whole a more spotty situation appears in the making. Declines are balanced by excess demands in other directions and there is no evidence of any material slack-ening. Inquiry for nail wire is strong, notably 10 gage; more new producers have acquired nail machines, but they are experiencing trouble in getting wire to feed them. Rod allocations over the next few months will approximate tonnage of this quarter; some Swedish rods are being finished and more are on order.

Boston—Considerable wire tonnage awaits definite assignment in first quarter schedules with mills operating on a monthly basis in February; in most carbon products there is ample tentative volume up for lead-time.

There are a few soft spots, as in bedding spring wire; music wire is available for the strength of able from stock on more sizes and grades. Capacity for the latter is far above pre-war and the same is true of rope wire. Delivery on the latter grades is near normal and demand for rope is fair. Here also war-built capacity is a factor with 22 companies forming rope; competition is keen and the margin limited. Automotive requirements hold at high levels with pressure for valve spring material heavy. Brush requirements are holding with full allocations being taken. Heading grades continue tight, notably in the middle size ranges.

- With farm and indus-Chicago trial demand for wire and wire products maintaining its high level, some industries cite this shortage as being an important factor in their output projections for next year. example, an official of the National





You appreciate the broad recognition and acceptance of BCA Ball Bearings in industry ...

You know you can tell your engineers to draw upon our halfcentury of experience in friction control practices, encompassing many varied fields of industry ...

You, who insist upon continuous, full-capacity, trouble-free operation, know this can be assured by specifying BCA Ball Bearings.

BEARINGS COMPANY OF AMERICA LANCASTER, PENNSYLVANIA

Association of Bedding Manufacturers last week predicted that if overall domestic consumption of steel continues at present levels his industry will lack about 30 per cent of its steel needs. No shortages have been sufficiently acute to slow down the industry appreciably this year, he said, but rising prices of materials used by the industry is one of its chief problems at present.

Birmingham — Some slackening in demand for wire is reported, probably due to inclement weather which has hampered agricultural work. In other quarters demand remains heavy and is estimated at more than 5 per cent above available tonnage.

Structural Shapes . . .

Structural Shape Prices, Page 127

Philadelphia — While structural fabricators have substantial backlogs and are not getting sufficient quantities of steel to reduce them materially, new buying is spotty, due principally to seasonal influences and to high construction costs. Some builders have temporarily postponed going ahead with commercial construction and a few have held up programs indefinitely, with the latter claiming that costs have reached the point where they are more than the projects are worth. Bids on public work have exceeded appropriations with little

prospect of construction going ahead for some time.

Boston — Power plant expansions are the backbone in structural demand for private construction, but on the whole new estimating and inquiry is down. Structural shops are constantly pressing for additional tonnage, but without success with one supplier cutting December allocations 50 per cent. Belgium structurals are being offered more freely at prices well over domestic quotations.

Los Angeles — New construction apparently has passed its peak, but demand is still far in excess of the limited supplies. Price resistance is making itself felt, and some construction is being delayed in the hope that costs can be shaved. In one respect, this is beneficial, for it relieves some of the pressure on structural materials.

Warehouse ...

Warehouse Prices, Page 129

Pittsburgh—Pattern of warehouse steel demand has recorded relatively little change in recent weeks. Restricted inventories continue to be distributed under a strict allotment basis, despite constant pressure from mill customers seeking to supplement their steel stocks through purchases from distributors. Most warehouse interests report steel inventory posi-tion as of Nov. 1 was moderately below that recorded Oct. 1, and expect this trend to continue through remainder of this year. This belief is based on reports from mill suppliers to effect that not all tonnage previously scheduled for November and December shipment can be fulfilled. In some instances this carryover tonnage has been canceled outright, while in others the mills have limited order acceptance for January and February rollings to absorb this tonnage.

Birmingham — Warehouse stocks of steel in this district remain precaricusly low and considerably below current normal needs, which makes it out of the question to even approximately meet today's high demands. Sheets and plates are reported as particularly scarce.

Los Angeles—Although requirements are far in excess of supply, and no product category is generally available in anything like adequate quantities, steel jobbers report a slight flattening off in the size of new orders. Demand for some products from these houses currently is off from 5 to 10 per cent. Price resistance is pronounced in structural shapes and, despite the short supply, customers are hesitant when offered this material at premium prices.

Seattle — Jobbers are making the best of a bad situation due to interrupted water shipments, lowered allocations for the first quarter and cancellation or deferment of essential items, adding to the difficulty of serving the trade satisfactorily. Inventories are low, Demand is strong for all items. In some instances, jobbers have turned to new sources of supply. Meanwhile all shipments are coming overland at higher freight costs. Stainless steel sheets are reported in fair supply.



Designed especially for "tough going," AMERICANS have what it takes to render smooth, dependable service in heavy industrial applications. Strong, precision built, longer lasting, they will minimize your anti-friction bearing problems, Our technical staff will assist you in selecting the right bearings for your needs. Write.



AMERICAN
ROLLER BEARING CO.
420 Melwood Street Pittsburgh, Pa.

Pacific Coast Office:

1718 S. Flower St., Los Angeles, Calif.

Pig Iron . . .

Pressure eases, although needs still exceed supply. Foreign iron prices dip

Pig Iron Prices, Page 128

Philadelphia — Pig iron is under a little less pressure, although requirements still exceed supply. Overall domestic production of iron is heavier and, while the longshoremen's strike has disrupted import shipments, the outlook is for continued relief from abroad, and at lower prices. Also contributing somewhat to easing pressure for iron is increasing spottiness in demand for gray fron castings. Foundries mostly affected are small jobbers, particularly those relatively new in the field. Some are very definitely beating the bushes for new husiness.

Allied Iron Inc., Chester, Pa., which is to operate the furnace acquired from the government at that point, is nearing completion of repairs and improvements and is expected to get into production around Dec. I, or shortly thereafter. The iron is to be used principally for conversion into also for the recombest transfer in the deal for the recombest transfer in the deal of t into skelp for the manufacture of pipe for Texas oil interests. Skelp is to be rolled in the Pittsburgh district, according to persistent reports. However, there have been some indications that at least some of the early iron to be produced at this furnace may move into the merchant trade.

Foreign iron prices continue to ease, although reports concerning some are difficult to check, because specifications involved cannot always be easily established, nor can the conditions surthe contracts. Trading rounding deals (foreign iron for plates, for instance) often throw additional light on some of the reported prices.

Actual date of transaction is another factor that often makes for confusion. Recently some Australian iron was reported due in the East at \$60 c.i.f. In at least this one stance, the transaction was made last January, with the intervening mar-ket higher. There are still other factors that enter into these foreign purchases which sometimes prove to be misleading in appraising the import

Dutch iron is now being offered at around \$71 or \$72, c.i.f. eastern seaboard, but the iron is off-grade iron and is being definitely sold as such. Hence, this price is not representa-tive of the foreign market for prime material. Prices are off a bit from earlier sales of iron of the same quality. Generally speaking, the foreign market on prime iron now averages around \$85. Steelmaking grades, sold usually in round tonnage, are coming in at around \$80, c.i.f., or a shade under. Foundry grades, sold generally in small lots, average \$85, or a little higher. At least two or three cargoes of foreign iron have been tied up in the East as a result of the waterfront strike, with other cargoes now enroute likely to be subject to the same difficulty unless the labor dispute is settled promptly. Further sailings from the other side have been postponed, pending settlement

Boston - Improvement in pig iron

supply continues. Mystic furnace is now producing malleable after relieving critical needs for No. 2 foundry. In a few instances shops are able to increase iron ratio of iron in melts. but percentage of scrap in mixtures is still abnormally high. Melt is off slightly and there is less snap to new volume; subcontracting has dwindled to usual volume which includes some normal farming out of castings by textile mill equipment builders. Foreign iron prices are lower with tonnage offered at around \$72 Boston, \$10 to \$15 below the peak at which most tonnage was bought late in the summer; with domestic supply improved, this is still too high for

most melters.
New York — Most district consumers are still pressing for iron, but the overall situation is not quite as stringent, due in part to a somewhat better supply and also to the fact that some foundries have less tonnage in prospect. Some foundries, in fact, are more active in their efforts to line up new business than at any time in recent years. In certain cases they have reduced their weekly schedules by a day or so.

Pittsburgh-Emphasis on improvement in coal quality, which would result in better metallurgical coke, is believed most logical path to follow during this period of critical pig iron

Do It Faster, Safer and Better with BROSIUS Manipulators and Chargers



Hot, back-breaking and dangerous handling jobs at your furnaces, presses and hammers, are a breeze with Brosius Manipulators and Chargers.

Built in capacities ranging from 2,000 to 20,000 pounds, Brosius Manipulators and Chargers are self-contained, hence require no tracks

or expensive runways.

Chargers are designed as tongs machines to handle billets, slabs, blooms, ingots, etc., or to handle a charging box for serving melting Because they can turn on their own wheelbase, they are particularly adapted for operations in limited or confined areas.

Brosius Manipulators are especially designed for manipulating forging blanks under hammers and presses, and the charging and drawing of heating furnaces. Like the Chargers, they are equipped with anti-friction bearings, rubber tires and hydraulic steering. Fatiguing effort is eliminated for the operator.

Edgar E. BROSIUS Company Inc.

Designers & Manufacturers of Special Equipment for Blast Furnaces & Steel Mills SHARPSBURG, Pittsburgh (15) PENNSYLVANIA

November 22, 1948

shortage. Adequate supply of high quality coke would make possible increased pig iron output throughout the country equivalent to about five new blast furnaces. Construction of elaborate coal washing facilities is nearing completion at the Robena mine of H. C. Frick Coke Co. in Greene county, Pennsylvania, while erection of similar facilities for large tonnage coal washing also has been undertaken by Jones & Laughlin Steel Corp. and other steel producers.

Birmingham — Pig iron supplies in the South, especially as concerns foundry requirements, continue wholly inadequate. Not a great deal is heard from consumers, since most of them apparently have come to realize the futility of expecting more. Production of iron by merchant melters is at capacity.

St. Louis — Missouri-Illinois Furnaces Inc. has achieved its former 1000-ton daily pig iron production rate following relining of one furnace. New rated capacity is almost 100 tons more than the 1000-ton figure, and officials hope to reach and establish the new capacity in December. Production is equally divided between basic and foundry iron. Pig customers are back to their former allocations and all of their reasonable demands are being met. The clamor for increased allocations is abating somewhat, but foundries are not yet building inventories. Most foundries which cut schedules from a five to a four-day week have returned to their old schedule.

Scrap . . .

Stronger price tone develops in Buffalo market with blast furnace grades advancing

Scrap Prices, Page 132

Buffalo - Midweek sales of blast furnace scrap items, aggregating about 10,000 tons at prices ranging from \$1 to \$2 a ton above the formula, broke the prolonged stalemate in the local market. However, the deadlock between leading mills and dealers continued in steelmaking grades as bids remained at the form-

Three of the leading consumers of blast furnace scrap entered the marblast turnace scrap entered the market simultaneously to place substantial orders at the advanced prices. Turnings rose to a range of \$38 to \$38.50 a ton, while short shovelings commanded \$40 to \$40.50. A few thousand tons of No. 1 cupola cast changed hands at \$66, or within the previous constant of \$56.75.75 to \$62.55. prevailing range of \$65.75 to \$66.25.

Further indications of a firmer market appeared when a leading mill revealed that unprocessed scrap was being taken in with No. 2 material at a price \$3.50 a ton below the format a price should be a star at \$4 below formula. These prices were considered bullish in view of the fact that processing usually is figured on the basis of \$5 a ton. There were also further reasons for considering present quotations on steelmaking grades, both here and elsewhere, as being of a nominal nature, because of the

tremendous amount of conversion business going on at higher prices. Dealers admit moving large quantities of material in such deals.

Boston — Cast scrap prices are slightly easier with premiums for open-hearth tonnage less frequent. There are no open breaks in any grade but the keen edge for scrap has been dulled at least temporarily. Several larger consumers of cast are not buying and inventories with some melters are best in months. Cast is still selling at higher prices than pig iron and the usual differential between these raw materials is at least reversed. While pig iron supply is less critical, available tonage is not sufficient to seriously bend price curve


Philadelphia — The leading eastern scrap consumer last week had two cargoes of scrap tied up as a result of the longshoremen's strike, one here and the other at New York. Unless there is early adjustment, the unloading of at least five other cargoes for this interest is likewise going to be delayed. The first cargo of German scrap to be received in this country for the account of United States Steel Corp. subsidiaries, and noted as arriving here recently, was not completely unloaded before the strike hit this unloaded before the strike int this port. This waterfront difficulty has given the market on steel scrap a slightly stronger understone, although it is not reflected in higher prices. In fact, the market on all principal grades of scrap, steel and cast iron, is unchanged, except for a slight increase in short shovel turnings, are now holding at \$38.50-\$39, delivered.

A reduction in freight rates on imported scrap from the eastern seaboard to Johnstown, Pa., and Pitts-burgh, is slated for Dec. 13, although an appeal has been made to put the new proposed rates into effect sooner on one to five days notice. The new proposed rates from Philadelphia to Johnstown are \$6.98, against the current rate of \$8.11; from Philadelphia

to Pittsburgh, \$7.58, against \$8.74. New York — Scrap brokers' prices are steady, although sentiment is a shade stronger momentarily as a resault of delay in the handling of for-eign scrap because of the longshore-men's strike. Unloading of several cargoes was held up last week and the near approach to these shores of several others promises further diffi-culty unless the labor dispute is promptly adjusted. Some unfortunate experiences have been had with German scrap recently at the mills. While the tonnage in the main has been regarded as of good quality, some live shells have been inadvertently included in the material, causing some damage to furnaces. As a result, material is being carefully screened.

Chicago Scattered grades of scrap were bringing higher prices last week, with rerolling rails and electric furnace bundles up \$2, and No. 1 wheels and 18-inch and shorter rails up \$1. Movement of scrap to open hearths and to cupolas continues steady and in large enough volume to permit building up of inventories. Mills' stocks are believed sufficient now for about a full quarter's operanow for about a full quarters opera-tions and very little pressure is be-ing exerted for increased tomnage. Foundry demand continues to sustain the prices for its grades. The relief

CHEAP CASTINGS CAN BE **EXPENSIVE**



Compared to the expense of machining this quarter panel, the cost of the casting is trivial. If a defect appeared after many hours of machine time had been spent on such a job, much more than the cost of the casting would be lost.

This doesn't mean you have to pay considerably more for sound, machinable castings. In fact, when you get that kind of castings from us, they probably won't cost you anything additional except the freight.

You'd be surprised to know how many

customers at a distance are coming to us for gray iron, alloy, and Strenes Metal castings to save machining cost and grief. It's because they have learned by experience that it pays to get castings that don't show up blowholes, cold shuts, hard spots, cracks, and sponginess in the course of machining.

We do the same class of work on job castings as on Strenes Metal cast dies. That may sound like a broad statement, but we can prove it. If you want the proof, write or phone us.

THE ADVANCE FOUNDRY CO., DAYTON 3, OHIO

ADVANCE STRENES METAL CASTINGS

ALLOY GRAY IRON GRAY IRON

which imported scrap brings to the eastern supply is sufficient to obviate the need for at least one company making an effort to buy foreign ma-

terial directly.

Cincinnati Scrap is moving steadily, and in most instances, at un-changed prices. Railroad specialties are off several dollars from recent levels and a few other grades show fluctuations. Foundry grades are, in the main, firm although buying interest has dimmed because of com-fortable inventories. Open-hearth Open-hearth grades are at formula.

Pittsburgh-Major consumers have not been accepting all the scrap tonnage offered in recent weeks because of fairly good inventories. Some in-terests are not buying any more scrap than is necessary on the pos-sibility of lower price levels within the next 60 days. One large producer purchased around 2500 tons of blast furnace turnings recently at \$39 with no springboard involved. This item had been moving within a price range of \$39.50 to \$40, plus 25 cents springboard. However, smaller mills are still reaching out for scrap from remote points. Supply of cast scrap items remains well below immediate needs, despite a substantial reduction in order backlogs among many gray iron jobbing foundries.

Birmingham — Open-hearth scrap prices remain unchanged, but efforts are under way to build up inventories where possible. Some sources anticipate an upward trend in prices soon.

St. Louis — A delayed fall pickup

in scrap shipments is finally allowing mills to accumulate winter reserves. For the first time this season receipts are substantially ahead of their daily melt. Mill stocks are 60 days or bet-

melt. Mill stocks are 60 days or better, and foundries are in nearly as
good position. A few melters are
having trouble finding space to stockpile the incoming scrap.

Dallas — Scrap prices remain unchanged and continue firm despite
generally low supplies and a comparatively slow market. While most
yards' inventories continue on a basis
of current needs, supplies are availof current needs, supplies are available to handle orders. The fact is, scrap dealers are not being flooded with orders.

· Houston — Supplies of scrap in this area remain fairly good but are barely beyond current needs. Prices are not expected to change soon. Only in isolated cases has there been any


difficulty in obtaining gondolas.

Los Angeles — Prevailing quotations are unchanged, but there is an easier undertone in No. 1 cast, and dealers are not paying over-the-mar-ket prices. Considerable tonnages are coming in, largely from Geneva, and foundries for the time being are obtaining ample supplies. Users here are desperate for steel-making scrap, for requirements have developed much faster than the ability of scrap suppliers to keep up.

Seattle — The market was caught off balance last week by Columbia Steel Co.'s announcement of the ap-pointment of Luria Bros. Inc., Phila-delphia, as the former's exclusive agents in the buying of scrap.

As a result the market moved up and receipts dropped, as shippers awaited possibly higher prices. Mean-while prices fluctuated, generally up-ward, and the market might be rated at \$27.50 to \$29.00, f.o.b. plant.

Typical of Hendrick's Manufacturing **Facilities**



Hendrick is exceptionally well equipped to manufacture to specifications a wide range of metal products that involve such operations as perforating, shaping, forming, welding, brazing, riveting, etc. The perforated elevator bucket illustrated is typical of the many specialized articles for whose fabrication Hendrick has unusual facilities. Write us in detail regarding any metal product you desire fabricated.




HENDRICK

Perforated Metals **Perforated Metal Screens Architectural Grilles** Mitco Open Steel Flooring,
"Shur-Site" Treads and

Manufacturing Company 30 DUNDAFF STREET, CARBONDALE, PENNA. Sales Offices In Principal Cities





Bevel and mitre gears up to 60" dia. are cut on gear planers to accurate tolerances.

CUSTOM MADE GEARS

up to 145" diameter

You can save time, money and errors in your large and heavy industrial gear requirements with the prompt, custom service of SIMONDS GEAR. Within easy shipping distance of many heavy industry plants—with a personalized attention to your specific gear requirements—SIMONDS GEAR is able to assure you fast, accurate gear service for all heavier gear needs. Size range includes: Spur Gears up to 145"—Bevel and Mitre Gears up to 60"—Worm Gears up to 72"—also worms, worm gears, racks and pinions. Materials include: cast or forged steel, gray iron, bronze, silent steel, rawhide and bakelite. Place your next heavy gear inquiry with SIMONDS GEAR and test the difference!



Rails, Cars . . .

Track Material Prices, Page 127

Chicago — Simultaneously with the Nov. 15 increase in No. 1 quality tee rail prices to \$3.50 per 100 pounds, f.o.b. Indiama Harbor, Ind., Inland Steel Co. revised its weight extras on tee rails to 15 cents per 100 lb for rails weighing less than 100 lb to 90 lb, inclusive, and to 30 cents for rails of less than 90 to 75 lb, inclusive. These extras previously had been 2-1/2 cents and 10 cents, respectively.

Joint bars weighing under 60 lb per pair, to and including 50 lb, now carry a weight extra of 45 cents per cwt, as against 25 cents formerly. Joint bars in the range of under 50 lb to and including 40 lb per pair now take an 80-cent weight extra, compared with 50 cents formerly; and for joint bars of less than 40 lb weight per pair weight extra now in force is \$1.20, compared with 75 cents, the extra previously in effect.

Extras on joint bars of special sections as modified in the press have been revised as follows: Joint bars, oversized not exceeding 1/32-in., from 5 cents to 10 cents; crowned not exceeding 1/32-in., from 5 cents; both oversized and crowned, total height not exceeding 1/32-in., from 5 cents to 10 cents. Extras on joint bars with lateral center overfill and/or head easement remain unchanged at 5 cents per cwt. Extras on joint bars which are otherwise modified in the press will be given upon application.

modified in the press will be given upon application.

New York — New York Central will close bids Nov. 30 for diesel electric locomotives, contract No. 36; also for track fastenings, contract No. 33. This carrier will also close bids Dec. 1 on structural steel castings for bridge No. 338, Cincinnati district, contract No. 35.

Canada . . .

Toronto — F. K. Ashbaugh, Canadian Steel Controller, stated that Canada's critical steel shortage has forced the country to start a world-wide search for scrap. Canadian trade representatives in Hong Kong, Singapore, Australia, Japan, South America and Germany have been asked to buy whatever is available. So dark is the picture, all Canadian industry and construction, with the exception of housing, is pinched.

To the man in the street the shortage is a vague and uncertain problem, but it might become real to him in shortages of Canadian built automobiles, refrigerators, stoves and furnaces if the dearth of steel continues for any length of time. These industries have been asked to "fend for themselves," to buy steel wherever they can until the problem is solved.

One gleam of hope is in the Montreal report of an electric steel refining process that cuts the job from 24 hours to 30 minutes. But the "refining-by-electricity" process, still in its pilot stages, is a revolutionary process for the future. What is needed, said Mr. Ashbaugh, is about \$20 million worth of blast furnaces, coke ovens and open hearths as soon as possible. The biggest news for Ontario is that a \$15 million blast furnace may be built in that province.

One location under consideration i Sault Ste. Marie.

A Cabinet spokesman in Ottawa stated that the Government is prepared to "shoot the works" on costs and is prepared to subsidize steel construction costs. "It will do anything within its power to alleviate the short age." The government also has or dered Trade Department supervisor to survey Canadian scrapyards for am estimate of what can be mad available to the steel industry. Canada's current steel shortage is estimated at 1 million tons of ingots year, that of scrap, 200,000 tons.

STRUCTURAL SHAPES . . .

STRUCTURAL STEEL PLACED

2200 tons, steel towers, transmission line Union Electric Co., St. Louis, to Lehig Structural Steel Co., Allentown, Pa.; Stor & Webster Engineering Corp., Boston, col tractor-engineer.

980 tons, warehouse, Amstrong Cork Co Lancaster, Pa., to Lehigh Structural Ste Co., Allentown, Pa.

925 tons, addition, boiler house, New Bedfor Gas & Edison Co., New Bedford, Mass., A. O. Wilson Structural Co., Cambridg Mass.

575 tons, New York Central station, Toled O., to Bethlehem Steel Co.

520 tons, brazing beams, sewage developmen Detroit, to American Bridge Co., Pittsburg Pa.

400 tons, addition, Public School 124, Bron to Dreier Structural Steel Co. Inc., Los Island City, N. Y.

400 tons, addition, Public School 246, Broodlyn, N. Y., to Dreier Structural Steel C. Inc., Long Island City, N. Y.

345 tons, Lawrence Hospital, Bronxville, N.Y. to Bethlehem Steel Co.

315 tons, laboratory, Allen B. Du Mont Co Clifton, N. J., to Bethlehem Steel Co.

250 tons, deck and moving facilities, Tex Co., Westville, N. J., to Bethlehem Ste Co.

240 tons, plant addition, Procter & Gamb Co., Cincinnati, through Day & Zimme man, Philadelphia, to Bethlehem Steel Co Bethlehem.

230 tons, state bridge, Schuylkill count Pennsylvania, to Bethlehem Steel Co.

225 tons, Washington state bridge, King couty, to Poole, McGonigle & Dick, Portlan Oreg.; general contract to Pacific Northe Construction Co., Bremerton, Wash.

200 tons, state bridge work, Westchest county, New York, through Garrofano Co struction Co. to Bethlehem Steel Co.

175 tons, shopping center, Washingto through Eldrisco Construction Co., to Bet lehem Steel Co.

165 tons, state bridge, Lackawanna count Pennsylvania, to Pine Brook Iron Work Scranton, Pa.

150 tons, 6-story apartment, 240th St. a Dash Place, New York, to Grand Ir Works Inc., that city.

130 tons, building, Merck & Co., Elkton, V. to Roanoke Iron & Bridge Works In Roanoke, Va.

100 tons, transmission towers for Bonneyl Power Administration, Reedsport, Oreg.; Schmitt Steel Co., Portland.

STRUCTURAL STEEL PENDING

2700 tons, section, municipal ferry termin St. George, Staten Island, N. Y.; Bethlehe Steel Co. low bidder.

765 tons, angles and channels, including tons wide flanged beam, corps of engineer Kansas City, Mo., inv. 108, bids Nov. 2 also 627 tons, plates, including wide, cov and gussets.

875 tons, shop buildings, General Electric C Pittsfield, Mass.; Charles T. Main In Boston, engineers.

WING WITHOUT SWAY ... BROWNING CRANES



An example of Proven Design

Browning Diesel Locomotive Cranes have:

★ Multiple Bolster Springs in each truck.

All-Welded Carbody and travel gear frame.

One-Piece Steel Casting for all deck machinery.

BROWNINGS rotate fast with minimum sway, give you maximum production with bucket, magnet, grapple or hook. This stable crane assures accurate load spotting.


And with a Browning you see while you swing. True full vision from the cab is another feature of the M-Series Diesel Locomotive Cranes.

Follow this series of ads. You'll see why Browning *Proven Design* means high production and economical operation. Write for illustrated folders on locomotive cranes, wagon cranes, truck cranes and shovels.

THE BROWNING CRANE & SHOVEL CO.
16222 Waterloo Road • Cleveland 10, Ohio

BROWNING

TRUCK and TU-CONTROL





SONS ROPE

. DENVER - SAN FRANCISCO - PORTLAND - SEATTLE

83

KENNERLY AVENUE . ST. LOUIS 12, MO., U.S.A.



- 300 tons, also 80 tons reinforcing bars, Bureau Public Roads bridge, Mt. Hood national forest, Oregon; bids to Portland, Nov. 30.
- 300 tons, factory building, Philco Corp., Philadelphia, for erection in Sandusky, O.; bids asked.
- 180 tons, garage, Cincinnati Gas & Electric Co., Cincinnati; bids asked through Day & Zimmerman, Philadelphia.
- 160 tons, addition, Enola diesel engine house, Pennsylvania Railroad, Harrisburg, Pa.; bids closed Nov. 17.
- Unstated, addition to Alcoa plant, Vancouver, Wash.; plans out.
- Unstated, miscellaneous items, sch. No. 2468; bids to Bonneville Power Administration Nov. 12.
- Unstated, U. S. Steeel I Beam-Lok or Irving type steel decking for Broadway bridge; bids to county commissioners, Portland, Oreg., Nov. 18.

REINFORCING BARS . . .

REINFORCING BARS PLACED

100 tons, Gorge diversion dam, Seattle's Skagit project, to Bethlehem Pacific Coast Steel Corp., Seattle; general contract to Cascade Contractors Inc. and A. V. Phillips, Seattle, joint low bidders, \$967,553.

REINFORCING BARS PENDING

- 123 tons, substructure state Clearwater river bridge, Lewiston, Idaho; bids called Nov. 19.
- Unstated, 1½ million gallon municipal water reservoir; bids to Ellen Martin, city clerk, Milwaukie, Oreg., Dec. 13,

PLATES . . .

PLATES PLACED

- 2000 tons, three tanks, Buckley Development Co., Bridgeport, Conn., to Bethlehem Steel Co.
- 300 tons, tanks, Webber Oil Co., Bangor, Me., to Hammond Iron Works, Warren, Pa.

RAILS, CARS . . .

LOCOMOTIVES PENDING

Northern Pacific, four 5400-horsepower dieselelectric passenger locomotives; directors authorize company to purchase.

RAILROAD CARS PLACED

- Atchison, Topeka & Santa Fe, 250 seventy-ton hopper cars and 50 mill-type gondola cars, to own shop.
- Chicago, Milwaukee, St. Paul & Pacific, 3880 freight cars, to own shops; list comprises 2330 gondola, 1000 box, 500 flat and 50 caboose cars.
- Chicago, Rock Island & Pacific, 1000 seventyton gondola cars, to own shops.
- Merchants Dispatch Transportation Corp., sixty 55-ton refrigerator cars, to own shop, East Rochester N. Y.
- Missouri-Kansas-Texas, 25 caboose cars, to own shops,

RAILROAD CARS PENDING

- New-York Central, maximum of approximately 6900 freight cars, bids Dec. 3; inquiry involves: 25 to 200 covered hoppers; 150 to more than 3000 fifty-five-ton all steel hoppers; 100 to 200 seventy-ton high side, dropend gondolas; 500 to 1500 drop end gondolas, with wood flooring; 500 to 1500 high side drop-end gondolas; and 500 flat cars with wood flooring. The equipment includes requirements of the Pittsburgh & Lake Erie, Indiana Harbor Belt Line and Peoria & Eastern, New York Central subsidiaries.
- Northern Pacific, 950 freight cars, directors have authorized company to acquire equipment; proposed list comprises 250 fifty-ton drop-bottom gondola, 250 fifty-ton hopper, 250 refrigerator and 200 seventy-ton ore cars.

RAILS PLACED

Reading Co., 25,000 tons of rail, to Bethlehem Steel Co

Exact / Weight RATIO

For BIGGER Carburizing Box Payloads

Handle more parts per load to boost production and reduce unit costs. Stanwood Engineering is automatic assurance of top to bottom design that holds weight to a minimum without sacrificing strength. The all-fabricated carburizing box shown is STANWOOD-DE-SIGNED to resist high tempera-

tures and corrosion and to stand up under the roughest handling. Yet it is extremely lightweight for BIG payloads. There are no corner welds . . . Long-life V-skids on bottom permit free air circulation Send for catalog 16 describing Stanwood baskets, trays, fixtures, retorts and carburizing hoxes.



CONSTRUCTION AND ENTERPRISE

CALIFORNIA

- LOS ANGELES—John Morrell & Co., 133 Willow St., is planning to make a \$140,00 addition to its meat packing plant; H. Ro Keller, 3723-A Wilshire Blvd., architect.
- SAN FRANCISCO—Edward E. Conn Saw & Tool Works has been incorporated with capital of \$125,000 by Edwin J. Conn Atherton; Lester T. Conn, Menlo Park; an Russell T. Conn, San Francisco; representative is John G. Evans, 703 Market St., Sa Francisco.
- SAN MATEO, CALIF.—Thermo-Steel Product Corp. has been formed with a capital of \$500,000 by Ulyss S. Mitchell and Viola F Mitchell, San Mateo, and Joseph W. Berna Berkeley; representative is Bernal & Berna Bank of America Bldg., Berkeley.

LOUISIANA

OPELOUSAS, LA.—Humble Oil & Refiner Co., 1216 Main St., Houston, Tex., he awarded a \$4 million contract to Hudso Construction & Engineering Co., 2711 Dar ville St., for construction of a refinery.

MARYLAND

BALTIMORE—American Radiator & Standar Sanitary Corp., 5315 Holabird Ave. hs awarded a \$150,000 contract to Morro Bros. Inc., 2315 N. Charles St., for con struction of a plant.

MASSACHUSETTS

CAMBRIDGE, MASS.—Mauck-Hill Corp., c/ John W. Galbreath & Co., agent, 42 E. Ga St., Columbus, O., has awarded a \$300,00 contract to Turner Construction Co., Nev bury St., Boston, for construction of warehouse with office space and garage c Vassar St.; Charles Greco, 11 Beacon St Boston, architect.

MINNESOTA

CHISHOLM, MINN.—Oliver Iron Mining Co 700 Wolvin Bldg., Duluth, is planning to build two \$500,000 locomotive and repa shops; one at Monroe open-pit mine and the other at Sherman open-pit mine.

MISSOURI

INDEPENDENCE, Mo.—Gleaner Harvest Corp., Cottage and Hayward Sts., In awarded a \$500,000 contract to Swense Construction Co., 3305 Terrace St., Kansi City, Mo., for construction of a manufaturing plant; E. W. Tanner & Associate 310 Ward Parkway, Kansas City, architects.

NEBRASKA

SEWARD, NEBR.—Seward County Rur Public Power District has awarded \$16,000 contract to the Foree Electrical Costruction Co., 502 National Bank of Topel Bldg., Topeka, Kan., for labor in come tion with the construction of 198 miles rural electric lines, materials costing \$110 000 to be provided by the cooperative; He ningson Engineering Co., Standard (Bldg., Omaha, consulting engineers.

NEW JERSEY

BELLEVILLE, N. J.—Mauck-Hill Corp., c John W. Galbreath & Co., agent, 42; Gay St., Columbus, O., has awarded \$300,000 contract to Turner Constructi Co., 420 Lexington Ave., New York, 2 erection of a warehouse with office sa and garage; William Higginson & Son, 1 Park Ave., New York, architects.

NEW YORK

BUFFALO—Lehigh Valley Railroad plans build facilities costing \$500,000 for servicing diesel-powered freight locomotives in the Tifft Street Terminal yards,

NEW YORK-Mauck-Hill Corp., c/o John

At 9 out of 10 of the largest and most important decision points in American industrial purchasing, MacRAE'S BLUE BOOK is used as a reference source "principally" or "exclusively."









FURNACE ENGINEERS, **FURNACES** FOR THE STEEL INDUSTRY



1551 W. LIBERTY AVE.

PITTSBURGH 26, PA.



HANDBOOK

Over one-million words of authoritative information—written by 603 metal experts! Covers properties, manufacture, processing, forming, finishing, fabrication and use of all metals. A long accepted source of accurate facts and valuable research data. 8½"x11" Clothbound \$15.00 AMERICAN SOCIETY

FOR METALS 7303 EUCLID AVENUE CLEVELAND 3, OHIO Serving the Metal Industry For Over 30 Years



WHEELING STEEL CORPORATION WHEELING, WEST VIRGINIA



Galbreath & Co., agent, 42 E. Gay St., Columbus, O., has awarded a \$300,000 contract to Turner Construction Co., 420 Lexington Ave., for construction of a warehouse, with office space and garage on 140 St. and Walton Ave.

OREGON

PORTLAND, OREG .- Schmitt Steel Co., 2765 N. W. Nicolai St., is planning to construct a plant; Moffatt, Nichol & Taylor, Concord Bldg., consulting engineers.

TENNESSEE

MONSANTO, TENN.-Monsanto Chemical Co. will construct a \$750,000 washing unit at its phosphorous plant to eliminate fluorine gas present in smoke from the plant.

TEXAS

BAYTOWN, TEX.—General Tire & Rubber Co. plans to expand its rubber plant to include manufacture of cold process rubber and a refrigeration plant at a cost of \$1,200,000.

BEAUMONT, TEXAS—Bethlehem Steel Co., E. C. Retchin, general manager, plans an

expenditure of \$3 million during 1949 for expansion of its facilities which will include a \$1 million drydock

HOUSTON, TEX.—Goodyear Synthetic Rubber Corp., LaPorte Rd., is planning to expand its rubber plant to include manufacture of cold process rubber and a refrigeration plant at a cost of \$1 million.

PORT LAVACA, TEX .- Aluminum Co. America is planning to build a \$3 million aluminum plant including an administration building, engine houses, cafeteria and store building; Wyatt C. Hedrick, 5201 Fannin St., Houston, engineer and architect.

PORT NECHES, TEX.—United States Rubber Reserve, operated by B. F. Goodrich Rub-ber Co., Beaumont, has awarded contracts totaling \$900,000 for remodeling and con-structing its rubber plant to provide for the manufacture of cold process rubber and to include a refrigeration plant.

TEXAS CITY, TEX .- Petrol Refining Inc. has awarded a \$400,000 contract to Rust Engineering Co., Clark Bldg., Pittsburgh, for design and construction of a crude oil top-

TEXAS CITY, TEX.—Carbide & Carbon Chemical Corp., is spending \$500,000 to expand its chemical plant.

VIRGINIA

RICHMOND, VA .- Hinde & Dauch Paper Co. has purchased land on Petersburg Pike for the construction of a new corrugated box factory; Carneal and Johnston, architects.

WASHINGTON

VANCOUVER, WASH.—Aluminum Co, of America has awarded a \$1 million contract to L. H. Hoffman Co., 715 S. W. Columbia St., Portland, Oreg., for flume trap im-provements at the aluminum plant.

CANADA

FLIN FLON, MAN.—Hudson Bay Mining & Smelting Co. Ltd., 500 Royal Bank Bldg., Winnipeg, will build a \$5 million slag fuming plant.

ORILLIA, ONT.—Porcelain & Metal Products Ltd., W. A. Ralph, manager, plans to build a \$100,000 manufacturing unit and storage addition,

addition.
VILLE LA SALLE, Montreal, Que.—Ross Engineering of Canada Ltd., St. Patrick St., has awarded a \$400,000 contract to J. S. Hewson Ltd., 660 St. Catherine St. W. Montreal, for construction of a factory and office; E. I. Glance, 5975 Monkland Ave. engineer.

PRICES OF LEADING FERROALLOYS PRODUCTS

(Continued from Page 129)

packed 12.1c, ton lot 13.55c, less ton 15.2c. Delivered. Spot, add 0.45c.

Low-Aluminum 50% Ferrosilicon: (Al 6.4 max.) Add 1.3c to 50% ferrosilicon prices.

75% Ferrosilicon: Contract, carload, lump, bulk, 13.0c per lb of contained Si, carload packed 14.3c, ton lot 15.45c, less ton 16.7c Delivered. Spot, add 0.3c.

80-90% Ferrosilicon: Contract, carload, lump, bulk 14.65-15c per lb of contained Si, carload packed 15.9c, ton 10t 16.9c, less ton 18.65c. Delivered. Spot, add 0.25c.

Low-Aluminum 85% Ferrosilicon: (Al 0.50% max.). Add 0.7c to 85% ferrosilicon prices.

90-95% Ferrosilicon: Contract, carload, lump, bulk, 16.5c per lb of contained Si, carload packed 17.7c, ton lot 18.65c, less ton 19.7c. Delivered. Spot, add 0.25c.

Low-Aluminum 90-95% Ferrosilicon: (Al 0.50% max.) Add 0.7c to above 90-95% ferrosilicon

Silicon Metal: (Mn, 97% Si and 1% max. Fe.). C.l., lump, bulk, regular 19.0c per hof Si c.l. packed 20.2c, ton lot 21.1c, less ton 22.1c. Add 1.5c for max. 0.10% calcium grade Deduct 0.4c for max. 2% Fe grade analyzing min. 96% Si. Spot, add 0.25c.

Asisfer: (Approx. 20% Al, 40% S!, 40% Fe). Contract, basis f.o.b. Niagara Falls, N. D., lump per lb cl 6.90c; ton lots packed, 7.40c; 200 to 1999 lb, 8.15c, smaller lots 8.65c; or, lump, carload, bulk, 8.40c per lb of alloy, packed c.l. 9.20c, ton lots 9.30c, 200 to 1000 lb 9.65c, less 200 lb 10.15c per lb of alloy, Delivered, Spot up 0.5c.

BRIQUETTED ALLOYS

Chromium Briquets: (Weighing approx. 3% lb each and containing exactly 2 lb of Cr). Contact, carload, bulk. 13.75c per lb of briquet, carload packed 14.45c, ton lot 15.25c, less ton 16.15c. Delivered. Add 0.25c for notching. Spot, add 0.25c.

ferromanganese Briquets: (Weighing approx. 3 lb and containing exactly 2 lb of Mn). Contract, carload, bulk, 10.00c per lb of briquet, c.l. packaged 10.8c, ton lot 11.6c, less ton 12.5c. Delivered. Add 0.25c for notching. Spot, add 0.25c. lb of 11.6c,

Silicomanganese Briquets: (Weighing approx. 3½ lb and containing exactly 2 lb of Mn and approx. ½ lb of Si). Contract, c.l. bulk 10.0c per lb of briquet, c.l. packed 10.8c, ton lot 11.6c, less ton 12.5c. Delivered. Add 0.25c for notching. Spot, add 0.25c.

Silicon Briquets: (Large size—weighing approx. 5 lb and containing exactly 2 lb of Si). Contract, carload, bulk 5.75c per lb of briquet, c.l. packed 6.55c, ton lot 7.35c, less ton 8.25c. Delivered. Spot, add 0.25c.

(Small size—weighing approx. 2½ lb and containing exactly 1 lb of Si). Carload, bulk 5.90c, c.l. packed 6.70c, ton lots 7.50c, less ton 8.40c. Delivered. Add 0.25c for notching, small size only. Spot, add 0.25c.

Molybdic-Oxide Briquets: (Containing 2½ lb of Mo each) 80.00c per pound of Mo contained, fob Langeloth, Pa.

CALCIUM ALLOYS

Calcium-Manganese-Silicon: (Ca 16-20%, Mn 14-18%, and Si 53-59%). Contract, carload, lump, bulk 19.25c per lb of alloy, carload packed 20.05c, ton lot 21.55c, less ton 22.55c. Delivered. Spot, add 0.25c.

Calcium-Silicon: (Ca 30-33%, Si 60-65%, Fe 1.50-3%). Contract, carload, lump, bulk 17.9c per lb of alloy, carload packed 19.1c, ton lot 21.0c, less ton 22.5c. Delivered. Spot, add 0.25c.

TITANIUM ALLOYS

Ferrotitanium, Low-Carbon: (Ti 20-25%, Al 3.5% max., Si 4% max., C 0.10% max.). Contract, ton lots, 2" x D, \$1.40 per lb of contained Ti; less ton \$1.45. (Ti 38-43%, Al 8% max., Si 4% max., C 0.10% max.). Ton lot \$1.28, less ton \$1.35. Fob Niagara Falls, N. Y., freight allowed to St. Louis. Spot add

Ferrotitanium, High-Carbon (Ti 15-18%, C 6-8%). Contract, \$160 per net ton, fob Niagara Falls, N. Y., freight allowed to destination east of Mississippi river and north of Baltimore and St. Louis.

Ferrotitanium, Medium-Carbon: (Ti 17-21% C 3-4.5%). Contract, \$175 per ton, fob Niagara Falls, N. Y., freight not exceeding St. Louis rate allowed.

VANADIUM ALLOYS
Ferrovanadium: Open Hearth Grade (Va 35-55%, Si 8-12% max., C 3-3.5 max.). Contract, any quantity, \$2.90 per lb of contained Va. Delivered. Spot., add 10c. Crucible-Special Grades (Va 35-55%, Si 3.25-4% max., C 0.5-1% max.), \$3. Primos and High Speed Grades (Va 35-55%, Si 1.50% max., C 0.20% max.), \$3.10.

Vanadium Oxide: Contract, less carload lots, \$1.20 per lb of contained V_2O_5 , fob Bridgeville, Pa. Spot, add 5c.

Grainal: Vanadum Grainal No. 1, 93c; No. 6, 63c; No. 79, 45c; all fob Bridgeville, Pa., usual freight allowance.

TUNGSTEN ALLOYS

Ferrotungsten: (W 70-80%). Contract, 10,000 lb W or more, \$2.25 per lb of contained W; 200 lb W to 10,000 lb W, \$2.35; less than 2000 lb W, \$2.47. Spot, add 2c.

Tungsten Powder: (W 98.8% min.). Contract or spot, 1000 lb or more, \$2.90 per lb of contained W; less than 1000 lb W, \$3.

ZIRCONIUM ALLOYS

2.150 Zirconium Alloys: (Zr 12-15%, Si 39-43%, Fe 40-45%, C 0.20% max.). Contract, c.l., lump, bulk 6.6c per lb of alloy, c.l. packed 7.35c, ton lot 8.1c, less ton 8.95c. Delivered. Spot, add 0.25c.

35-40% Zirconium Alloy: (Zr 35-40%, Si 47-52%, Fe 8-12%, C 0.50% max.). Contract,

carload, lump, packed 20.25c per lb of alloy ton lot 21c, less ton 22.25c. Freight allowed Spot, add 0.25c.

BORON ALLOYS

Ferroboron: (B 17.50% min., Si 1.50% max., Al 0.50% max., C 0.50% max.), Contract 100 lb or more. 1" x D, \$1.20 per lb of alloy. Less than 100 lb \$1.30. Delivered, Spot,

add 5c.

Borosli: (3 to 4% B, 40 to 45% Si), \$6.25 per

lb contained B, fob Philo, O., freight not exceeding St. Louis rate allowed.

Bortam (B 1.5-1.9%). Ton lots, 45c per lb;

smaller lots, 50c per lb.

Carbortam: (B 0.90 to 1.15%). Net ton the carload, Sc per lb, fob Suspension Bridge N. Y., freight allowed same as high-carbon ferrotitanium.

OTHER FERROALLOYS

Ferrocolumbium: (Cb 50-60%, Mn 5% max Si 8% max, C 0.5% max,). Contract, ton lot. 2" x D, \$2.75 per lb of contained Cb, less tos \$2.80. Delivered. Spot, and 10c.

CMSZ Mixes: (No. 4—Cr. 45-49%, Mn. 4-6%, Si 18-21%, Zr 1.25-1.75%, C 3-4.5%; No. 5—Cr 50-56%, Mn. 4-6%, Si 12.50-16.0%; Zr 0.75-1.25%, C 3.50-5%). Carload, 12 M x D, carload packed 19.0c per lb of material, ton 164 19.75c, less ton 21.0c. Delivered.

Silcaz Alloy: (Si 35-40%, Ca 9-11%; Al 6-8%, Zr 3-5-%, Ti 9-11%, Boron 0.55-0.75 %). Carload, packed, 1" x D, 43c per lb of alloy, tos lot 45c, less ton 47c. Delivered.

SMZ Alloy: (Si 60-65%, Mn 5-7%, Zr 5-7%, Fe 20% approx.). Contract, carload, packed, \$\frac{\pi}{e}" \times 12 M, 16.5c per lb of alloy, ton lots 17.25c, less ton 18.5c. Delivered. Spot, add

Graphidox No. 4: (Si 42-46%, Ca 5%, Ti 9%). C.l. packed, 16.50-17.00c per lb of alloy; too lots 17.90-18.00c; less ton lots 19.40-19.50, fob Niagara Falls, N. Y.; freight allowed to

V-5 Foundry Alloy: (Cr 38-42%, Si 17-19%, Mn 8-11%; V-7, Cr 28-32%, Si 15-21%, Mn 14-16%). C.1. packed, 14.25c per lb. of alloy: ton lots 15.75c; less ton lots 17.00c, fob Nagara Falls, N. Y.; freight allowed to St.

Simanal: (Approx. 20% each S!, Mn, Al). Packed, lump, carload 11c, ton lots 11.25c, smaller lots 11.75c per lb alloy; freight not exceeding St. Louis rate allowed.

Ferrophosphorus (23-25% based on 24% P content with unitage of \$3 for each 1% of P above or below the base): Gross tons per carload, fob sellers' works, Mt. Pleasant, or Sigo. Tenn.; \$65 per gross ton.

Ferromolybdenum: (55-75%), Per lb, contained Mo, fob Langeloth and Washington. Pa., furnace, any quantity 95.00c. Effective Jan. 1, 1949, price will be \$1.10, Langeloth.

Technical Molybdic-Oxide: Per lb, contained Mo, fob Langeloth, Pa., packed in bags containing 20 lb of molybdenum, 80.00c.